


# CEE Wall mounted plugs

## Wall mounted plug IP67

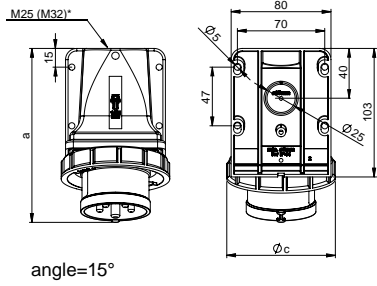


	16 Amp			32 Amp		
	3	4	5	4	5	
a [mm]	136	138	140	150	153	152
Height [mm]	99	94	100	104	104	102
c [mm]	71	79	87	93	93	102
M* [mm]	25	25	25	25	25	25
: L U H 2 H [ L E Φ H [mmO [mm	1-2,5			2,5-6		
Wire solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	200	223	242	260	280	306

- with screw terminals
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a „v“ e.g. 5152-6kv
- top or rear entry
- incl. threaded bung

IP67 watertight

\*M32 optional on request available

## Wall mounted plug IP44

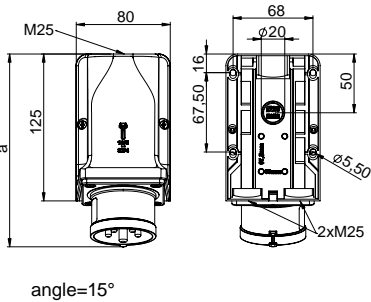


	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	163	163	164	173	173	174
Height [mm]	109	109	112	115	115	118
M [mm]	3x25	3x25	3x25	3x25	3x25	3x25
: L U H 2 H [ L E Φ H [mmO [mm	1-2,5			2,5-6		
Wire solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	263	278	295	302	322	341

- with screw terminals
- for wiring through
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 9515-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

## Wall mounted plug - COMBO IP44

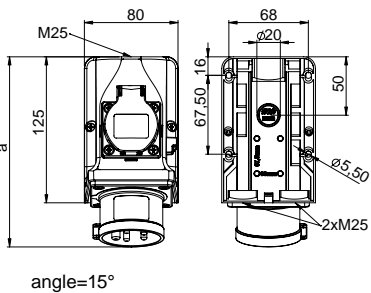


	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	162	162	163	172		173
Height [mm]	117	117	117	117		118
M [mm]	3x25	3x25	3x25	3x25		3x25
: L U H 2 H [ L E Φ H [mmO [mm	1-2,5			2,5-6		
Wire solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws CEE [Ncm]	100			110		
Screw terminals [Ncm]	120					
Weight [g]	367	382	399	422		463

- with screw terminals
- wall mounted plug with integrated safety socket acc. Austr./Germ. system
- connecting terminals up to 10mm<sup>2</sup>
- ready wired
- for plug 32A the safety socket is protected by fuse (10A slow)
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 95215-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet
- special design with Belg./French socket outlet or non wired version are available on request

IP44 splashproof

## Wall mounted plug with switch IP44

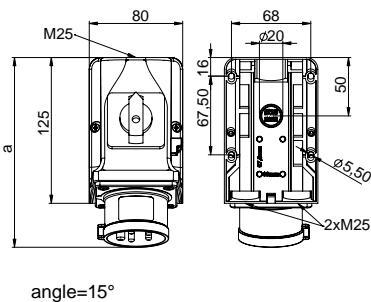

	16 Amp		32 Amp	
	5		5	
a [mm]	163		173	
Height [mm]	128		128	
M [mm]	3x25		3x25	
: L U H 2 H [ L E Φ H [mmO [mm	1-2,5		2,5-6	
Wire solid [mm <sup>2</sup> ]	1-4		2,5-10	
Weight [g]	474		522	

- with screw terminals
- wall mounting plug with integrated ON/OFF switch AC22A
- prewired
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 75615-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

110V~

Amp.	Poles	pack. unit	50/60Hz	50/60Hz	50/60Hz	50/60Hz	100-300Hz	301-500Hz
			4h	3p=6h 4p+5p=9h	3p=9h 4p+5p=6h	7h	10h	2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	5	5132-4k	5132-6k	5132-9k	5132-7k	5132-10k	5132-2k
16	4	5	5142-4k	5142-9k	5142-6k	5142-7k	5142-10k	5142-2k
16	5	5	5152-4k	5152-9k	5152-6k	5152-7k	5152-10k	5152-2k
32	3	5	5232-4k	5232-6k	5232-9k	5232-7k	5232-10k	5232-2k
32	4	5	5242-4k	5242-9k	5242-6k	5242-7k	5242-10k	5242-2k
32	5	5	5252-4k	5252-9k	5252-6k	5252-7k	5252-10k	5252-2k



5132-6k

16	3	5	9513-4	9513-6	9513-9	9513-7	9513-10	9513-2
16	4	5	9514-4	9514-9	9514-6	9514-7	9514-10	9514-2
16	5	5	9515-4	9515-9	9515-6	9515-7	9515-10	9515-2
32	3	5	9523-4	9523-6	9523-9	9523-7	9523-10	9523-2
32	4	5	9524-4	9524-9	9524-6	9524-7	9524-10	9524-2
32	5	5	9525-4	9525-9	9525-6	9525-7	9525-10	9525-2



16	3	5		95213-6				
16	4	5						
16	5	5			95215-6			
32	3	5		95223-6				
32	5	5			95225-6			



16	5	5						75615-6
32	5	5						75625-6



75615-6