



# DELTA<sup>^</sup> detail

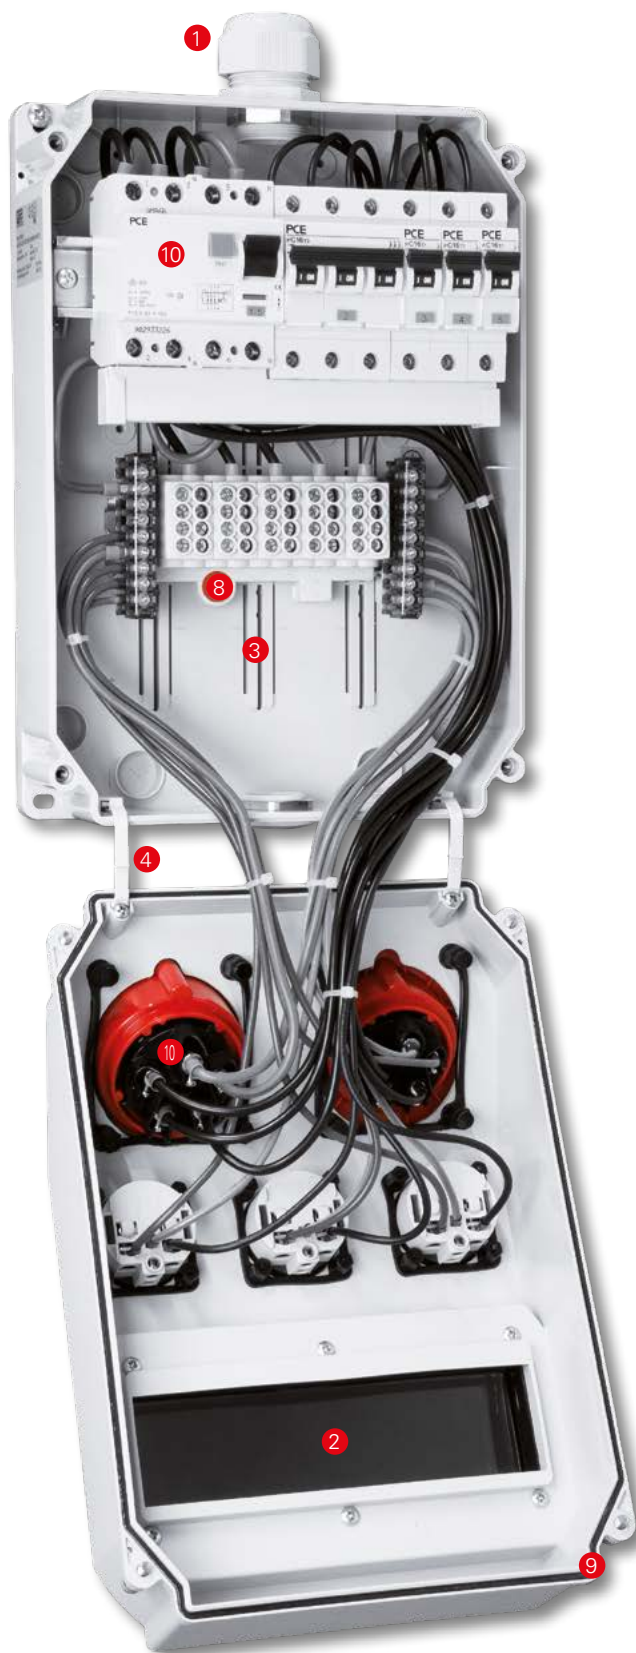

- 1 Cable entries up to max. M63, preferably from the top or bottom.
- 2 PCE hinged windows from 2 to 18 modules can be used in IP54 or IP66/67. The transparent protective, upward opening, cover of the window can be locked and sealed.
- 3 A variable groove shaped rail retention system on the inside floor allows optimum and individual positioning of the fittings, assembly plates, etc.
- 4 The cover and bottom part of the enclosure is connected by a flexible hinge, available in 2 different lengths.
- 5 The enclosures can be optimally adapted to each other thanks to the straight housing walls.
- 6 All external screws are made from stainless steel to resist in especially demanding operating conditions.
- 7 Wall mounting is possible in- or outside the protective area.
- 8 Distribution box ready wired on main terminal
- 9 Use of high-quality foamed\* polyurethane seals.
- 10 Any type of switchgears, socket devices, such as CEE sockets 16A 3p to 125A 5p and safety sockets (Austrian/German, French/Belgian, Danish, British or Swiss standards) can be used for assembling.
- 11 Metric thread insert made of brass\*\*.


\*) inserted in series Lech

\*\*) with series Lech directly in the plastic

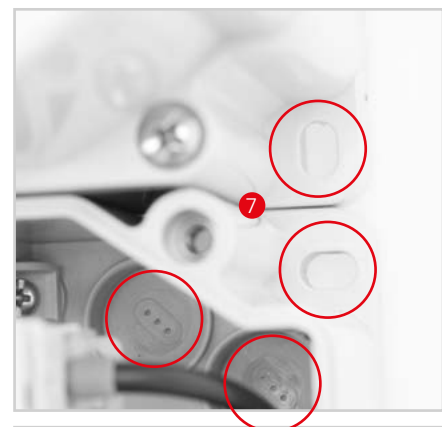

# Thermoplastic insulated distribution boxes **DELTA**<sup>▲</sup>

## Series LECH

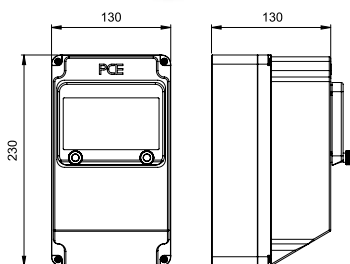

### Series LECH

- **Socket outlet combination acc. EN 61439**
- Housing made of high durable, impact resistant PC
- **Dimensions HxWxD = 230x130x130 mm**
- Switchgear up to 6 modules, behind transparent window
- Ready wired for connection
- **IP54** (IP67 on request)

### Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through
- Thread for cable gland 1xM25 on top, 2x break out openings M25 bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			1	1		1xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 16A RDF 0,8	<b>9605105</b>
		1		1		1xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,8	<b>9605351</b>
			1	2		1xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,8	<b>9605153</b>
			1	2		1xMCB 16A 3p-C 2xMCB 16A 1p-C	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,8	<b>9605159</b>
			1	2	1xRCD 40A/4/0.03A (TYPE A 25AT)	2xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 16A RDF 0,8	<b>9605150</b>
		1		2		2xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,8	<b>9605056</b>
		1		2	1xRCD 63A/4/0.03A (TYPE A 40AT)	2xMCB 16A 1p-B	1xM25 (thread) top 2xM25 (break out) bottom	InA 32A RDF 0,6	<b>9605320</b>
				3	1xRCD 40A/4/0.03A (TYPE A 25AT)		1xM25 (thread) top 2xM25 (break out) bottom	InA 16A RDF 0,8	<b>9605010</b>

InA= Rated current of switchgear and control gear assembly; RDF = Rated diversity factor