




Technical specifications

Series	FBE
Standard	IEC60947-5-1
Rated voltage U_n , V	~12/24/230
Rated frequency f , Hz	50/60
Rated voltage of the insulation U_i , V	500
Rated impulse withstand voltage U_{imp} , V	5000
Consumption power P , W	8
Maximum volume, dB	75
Cross-section of connecting conductors, mm ²	up to 6
DIN rail mounting	TN35
Degree of protection	IP20
Connecting of busbar	no
Operating position	any


Features

- It is used in various control and automation circuits as an audible signaling device.
- It is used as a household call.

Schematic diagrams

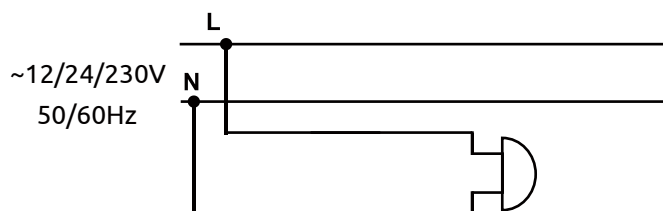

Overall dimensions

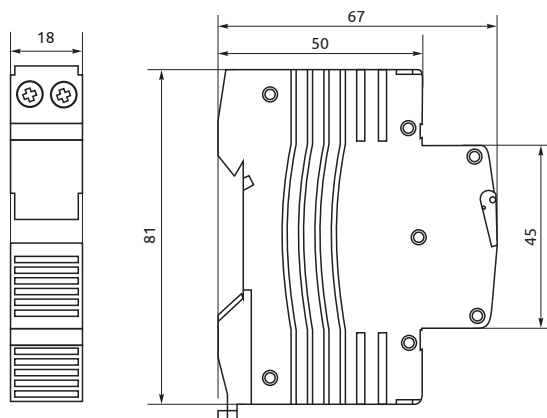

Order code	Full name of	Packaging, pcs		Gross weight, kg		
		Packaging	Box	Unit	Packaging	Box
FBE012	Modular electric bell FBE 12V	12	120	0,062	0,830	7,900
FBE230	Modular electric bell FBE 230V	12	120	0,064	0,850	8,130
FBE024	Modular electric bell FBE 24V	12	120	0,067	0,890	8,500