

Switches with lever

PSA-263 2-track, network-aggregate modular switch 63 A

PSA-440 4-track, network-aggregate modular switch 40 A

PSA-463 4-track, network-aggregate modular switch 63 A



PSA-263




PSA-440




PSA-463

	PSA-263	PSA-440	PSA-463
number of tracks	2P	4P	4P
switching program		1-0-2	
rated voltage (AC)		230/400 V	
rated frequency		50÷60 Hz	
current capacity AC-21 (category B)	63 A	40 A	63 A
current capacity AC-22 (category A)	63 A	40 A	63 A
electrical strength		5.000 cycles	
mechanical strength		15.000 cycles	
working temperature		-20÷50°C	
terminal (screw terminals)		10 mm² (cord) 16 mm² (wire)	
tightening torque		1.8 Nm	
dimensions	2 modules (35 mm)	4 modules (70 mm)	4 modules (70 mm)
mounting		for TH-35 rail	
ingress protection		IP20	

Wiring diagram

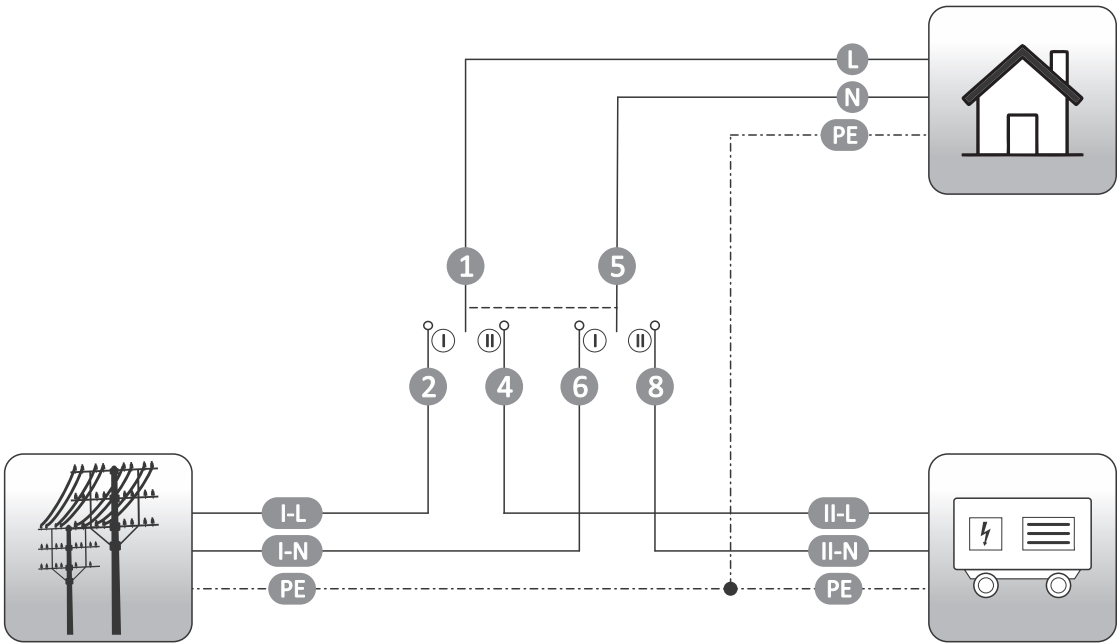

PSA-263

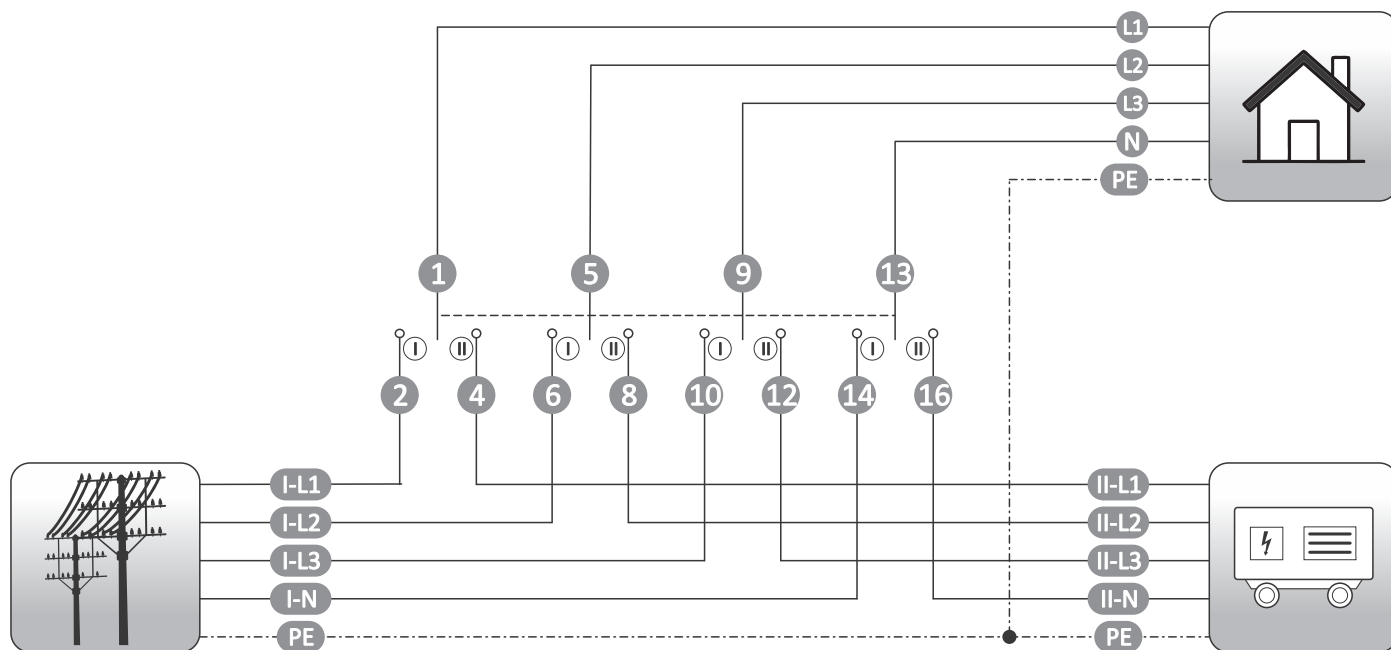

PSA-440/PSA-463