

Horus Plus 1500

The power keeper

PN: PWUP-LI150H1-AZ01B
EAN: 6422956006440

Specifications

Capacity	1500 VA / 900 W
Type	Line Interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	170-280 VAC
Frequency Range	60/50 Hz (auto sensing)
Output	
Nominal Voltage	230 VAC
AC Voltage Regulation (Batt. Mode)	±10%
Frequency Range (Batt. Mode)	60 Hz or 50 Hz ±1 Hz
Waveform (Batt. Mode)	Simulated Sine Wave
Transfer Time	Typical 2-6 ms
AVR	
Type	2 Boost / 1 Buck
Indicators type	
LCD Display	Input voltage, output voltage, battery capacity, load level and UPS status
Alarm	
Battery Mode	Sounding every 10 seconds
Low Battery	Sounding every second
Overload	Sounding every 0.5 seconds
Fault	Continuously sounding
Protection	
Outlets type	4 x Schuko Battery Backup 2 x RJ11/45 (IN/OUT) for modem/phone/LAN surge protection
Full protection	Over/ under voltage protection, Overload, Discharge and Overcharge Protection



Software Included



Auto-Restart



LCD Touchscreen display

- Touchscreen LCD to display UPS information circularly
- Excellent microprocessor control guarantees high reliability
- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Simulated sine wave
- Off-mode charging
- Cold start function
- Software Management (ViewPower)

Environnement

Humidity 0-90 % RH @ 0-40°C
(non-condensing)

Noise level Less than 40dB

Battery

Battery Type & Number 2x GP09122L
PN: BTVACGUEBTC2LBT01B

Typical Recharge Time 4-6 hours up to 90% capacity

Running time on battery (minutes)
25% Load - 19 min
50% Load - 7.5 min
75% Load - 4 min
100% Load - < 2 min

Management

Connection port USB

Software <https://www.power-software-download.com/viewpower.html>

Software capability Monitor & Control over USB



Physical

Product dimensions 320 x 130 x 182 mm

Cable length 1.4 m


Product weight 9.9 kg

Retail Pack Dimensions 390 x 192 x 275 mm

Retail Pack Weight 10.58 kg



Running time on battery

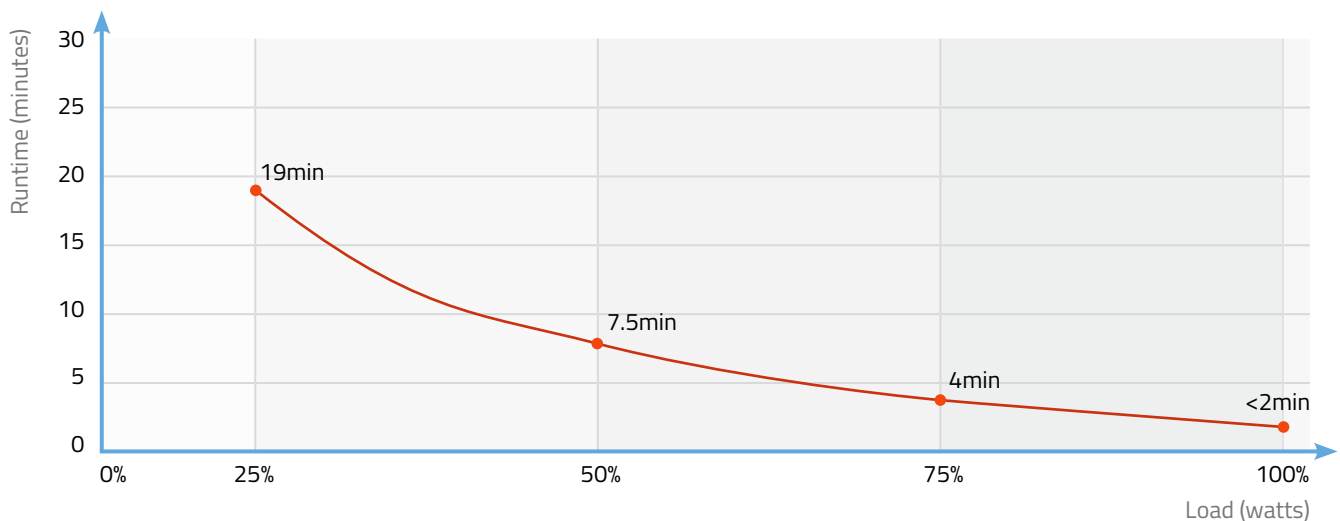

Logistics

	Carton Box Size	390 x 192 x 275 mm
	Pieces in the Carton Box	1 pcs / ctn
	Net & Gross weight / CTN	N.W. / G.W.: 9.9 kg / 10.58 kg



Certificates

RoHS
2011/65/EU

