

# UPS LINE INTERACTIVE





# UPS RACK

## CARACTERISTICI



- culoare: negru
- carcasa metalica
- display LCD
- mod economic si inteligent de functionare
- restart automat
- online static bypass
- aplicatii: electronice / electrocasnice / echipament medical / sisteme de securitate
- optional: interfata via Smart USB: Windows (XP, 7, 8, 10), Linux, Unix, BSD

## PROTECTIE




- protectie complet 6: suprasarcina, supratensiune, supraincarcare, descarcare electrica & scurt-circuit



Modelul 1000VA contine acumulatori interni



Modelele 2000VA si 3000VA au acumulatori externi (rack-ul inferior)

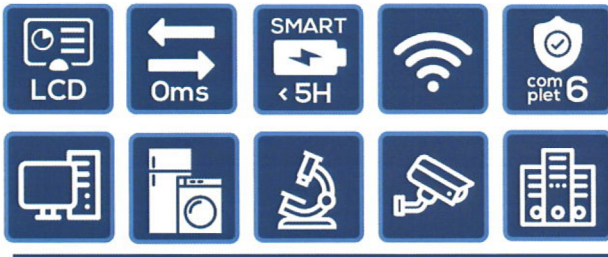

APLICATII

SPECIFICATII TEHNICE	OPTIUNEA 1000VA	OPTIUNEA 2000VA	OPTIUNEA 3000VA
Putere	1000W	2000W	3000W
Tensiune / Frecventa intrare	120V-300V AC / 45Hz-65Hz		
THDi	<5% la sarcina max.		
Tensiune / Frecventa iesire	230V AC / 50Hz		
Distorsie Armonica	THD < 5% non-liniar; THD < 3% liniar		
Unda / Factor de putere	sinusoidala pura / 1		
Timp de transfer	0ms		
Capacitate suprasarcina	< 130%: 30s; > 130% 0.2s;		
Conectori iesire	2x Schucko + 3x IEC + 1x RS232		
Tip Acumulator	2x 12V / 7.1 Ah intern	6x 12V / 7.1 Ah extern	6x 12V / 9.1 Ah extern
Timp de back-up (100%)	10min		
Timp de re-incarcare	< 5h		
Dimensiuni (L x l x i)	145mm x 220mm x 2U	195mm x 330mm x 4U	
Greutate	12kg	32kg	33kg
Nivel zgomot	< 40dB	< 50dB	
Temperatura functionare	0°C pana la 40°C		
Umiditate functionare	0-90% fara condens		
Cod produs	A0060008	DZ085375	DZ088394