

Înteruptor compact, tip AKM, cu declanșator termic și magnetic reglabil

230/400 V AC	50/60 Hz	U_i 1000 V	U_{imp} 8 kV	T_o -5..+40°C	T_a -25..+65°C		2000 m
-----------------	----------	-----------------	-------------------	--------------------	---------------------	--	--------


Legendă pictograme I/O




I_r	AKM1,-2,-3,-4	0,8-1 ($\times I_n$)
I_i	AKM1,-2,-3,-4	5-10 ($\times I_n$)
I_{cu} (kA _{eff}) AC 400 V	AKM1, AKM2	36
	AKM3, AKM4	50
I_{cs} (kA _{eff}) AC 400 V	AKM1, AKM2	25
	AKM3, AKM4	35
I_{max}	AKM1,-2	120
	AKM3,-4	60
I_{max}	AKM1,-2	7000
	AKM3,-4	4000
I_{max}	AKM1,-2	1000
	AKM3,-4	1000
(kg)	AKM1	1,50
	AKM2	1,92
	AKM3	5,00
	AKM4	5,25

TRACON	I_e	I_r	TRACON	I_e	I_r	TRACON	I_e	I_r	TRACON	I_e	I_r
AKM1-20	20	(16-20)	AKM1-63	63	(50,4-63)	AKM1-160	160	(128-160)	AKM3-400	400	(320-400)
AKM1-32	32	(25,6-32)	AKM1-80	80	(64-80)	AKM2-180	180	(144-180)	AKM4-630	630	(504-630)
AKM1-40	40	(32-40)	AKM1-125	125	(100-125)	AKM2-250	250	(200-250)			


Desen cotat (AKM1)

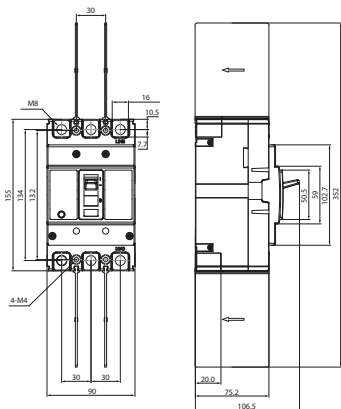

Desen cotat (AKM2)

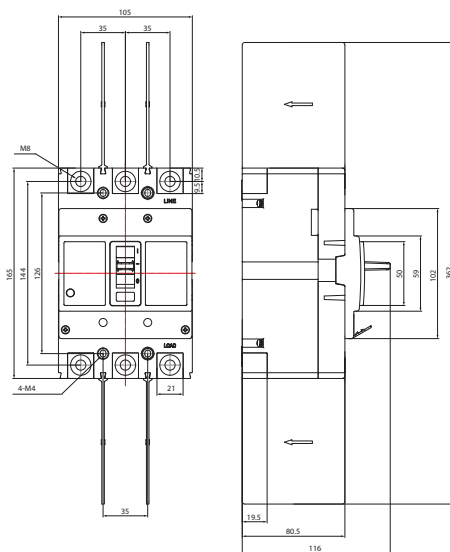

Desen cotat (AKM3,-4)

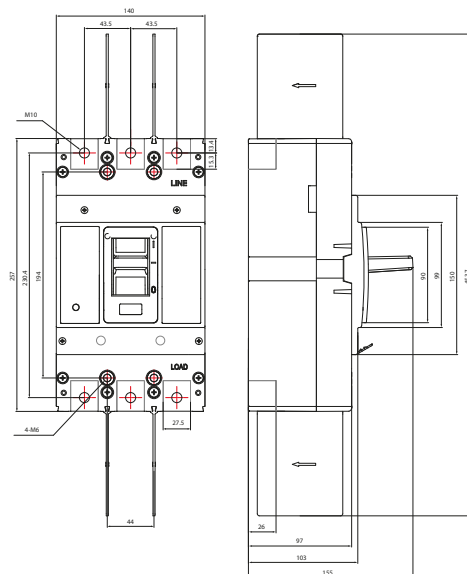

CITIȚI CODUL !

- Vezi noutățile noastre
- Fiți informat

**Gama de produse se dezvoltă continuu și rapid!
Catalogul nostru reflectă situația din Aprilie 2021.
Pentru informații actualizate vizitați pagina
noastră de internet!**