


CICLU DE UTILIZARE ACUMULATORI GEL

Cu **50%** mai multe cicluri de utilizare la **descarcare adanca** in comparatie cu gama de acumulatori standard

100% descarcare adanca: **600** cicluri

50% descarcare adanca: **1000** cicluri

30% descarcare adanca: **2300** cicluri

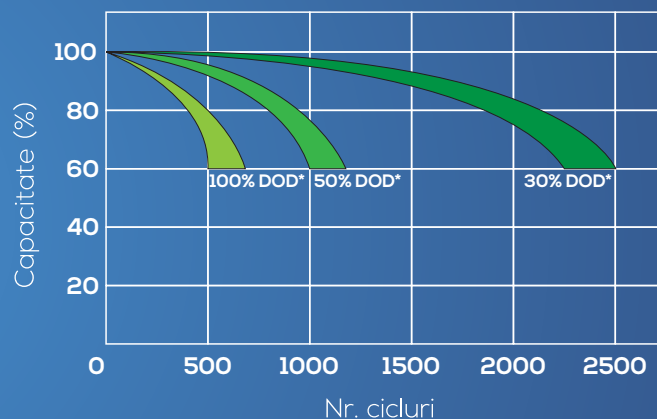

DOD* - Adancime de Descarcare (Depth of Discharge)
Temperatura de testare: 25°C

SPECIFICATII TEHNICE



TEDGDC1236

Voltaj	12 V
Capacitate	36 A
Terminal	M5
Tehnologie	GEL, VRLA
Compozitie	GEL
Dimensiuni	195 x 128 x 155 mm
Greutate	10 kg
Ambalare	1 buc.

TEDGDC1236 36Ah



SPECIFICATII TEHNICE



TEDGDC1246

Voltaj	12 V
Capacitate	46 A
Terminal	M6
Tehnologie	GEL, VRLA
Compozitie	GEL
Dimensiuni	197 x 166 x 171 mm
Greutate	14.4 kg
Ambalare	1 buc.

TEDGDC1246 46Ah



SPECIFICATII TEHNICE



TEDGDC1257

Voltaj	12 V
Capacitate	57 A
Terminal	M6
Tehnologie	GEL, VRLA
Compozitie	GEL
Dimensiuni	229 x 138 x 208 mm
Greutate	15.1 kg
Ambalare	1 buc.

TEDGDC1257 57Ah

