

# UPS LINE INTERACTIVE





# UPS-uri Trifazate


## TED ONLINE UPS TOWER

### CARACTERISTICI

- culori: negru
- carcasa metalica
- 4 x roti pentru manevrare usoara
- display LCD
- mod economic de functionare
- online static bypass
- restart automat
- pornire inteligenta in modul DC ( functie Cold Start)
- interfata via Smart USB: Windows (XP, 7, 8, 10), Linux, Unix, BSD
- aplicatii: echipament medical / servere / ateliere / iluminat / sisteme de securitate

### PROTECTIE

- protectie complet 6: suprasarcina, supratensiune, supraincarcare, descarcare electrica & scurt-circuit

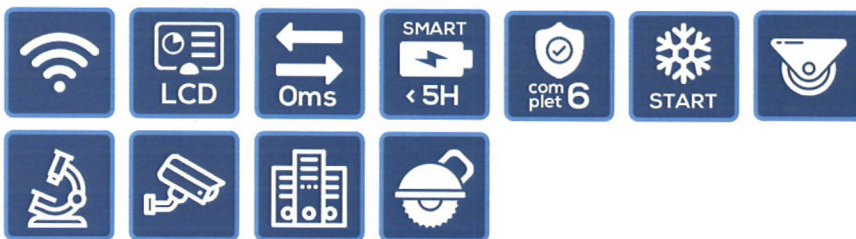

APLICATII

TRIFAZATE

SPECIFICATII TEHNICE	OPTIUNEA 6kVA	OPTIUNEA 10kVA	OPTIUNEA 10kVA 3/1	OPTIUNEA 10kVA 3/3	OPTIUNEA 20kVA
Putere	5.4kW	9kW	9kW	9kW	18kW
Tensiune / Frecventa intrare	120V-275V AC / 45Hz-55Hz		304V-475V AC / 45Hz-55Hz		
THDi	<5%				
Tensiune / Frecventa iesire	230VAC (monofazat) / 50Hz				
Distorsie Armonica	THD < 5% non-liniar; THD < 3% liniar				
Unda / Factor de putere	sinusoidala pura / 0.9				
Timp de transfer	0ms				
Capacitate suprasarcina	105% - 125% 60s; 125%- 150% 30s; >150% 0.5s				
Conectori iesire	regleta + RS232				
Nr. acumulatori	16x acum. AGM	20x acum. AGM		30x acum. AGM	
Timp de back-up (100%)	10min				
Timp de re-incarcare	< 5h				
Dimensiuni (L x l x i)	300 x 550 x 700 mm		300 x 600 x 1000 mm		
Greutate	53kg	58kg	64kg	109kg	183kg
Nivel zgomot	< 50dB				
Temperatura functionare	0°C pana la 40°C				
Umiditate functionare	0-90% fara condens				
Cod produs	DZ088395	A0058830	BA087604	pe comanda	DZ088400

Electric

Fizic