






MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA14-01020	A60-Dimmable	E27	3000K	10W	60W	806Lm	220V-240VAC	>80	>0.8	180°	Alm+Plastic	100
BA14-01021	A60-Dimmable	E27	4200K	10W	60W	806Lm	220V-240VAC	>80	>0.8	180°	Alm+Plastic	100

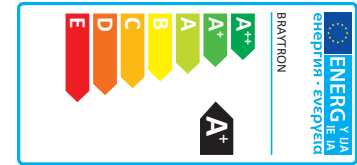


MODEL NO	CCT	WATT(AC)	WATT(DC)	WORKING TIME	CHARGING TIME	LUMINOUS	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA14-30823	6500K	8W	3W	3 Hours	10 Hours	500Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	50

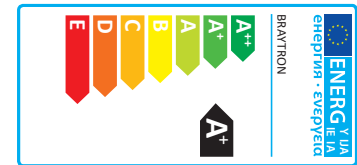

MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA33-01420	G95	E27	3000K	14W	85W	1220Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	32
BA33-01423	G95	E27	6500K	14W	85W	1220Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	32

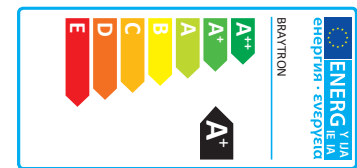

MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA34-00610	R50	E14	3000K	6W	45W	550Lm	220V-240VAC	>80	>0.5	150°	Alm+Plastic	100
BA34-00613	R50	E14	6500K	6W	45W	550Lm	220V-240VAC	>80	>0.5	150°	Alm+Plastic	100

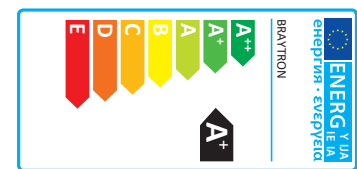

\*Technical information indicated above may have tolerance ±%10. For final updated information please visit website [www.braytron.com](http://www.braytron.com)