



### Product Benefits

- Operates in main supply and emergency mode
- Protection against battery overcharge
- Equipped with Auto-test function
- Fitting designed to be used with any kind of pictogram
- include maintained and non-maintained functions
- Designed to be suitable for waterproof and dustproof
- Suitable for surface and recessed use

### Applications

- Public buildings
- Commercial Buildings
- Schools, Hospitals
- Parking lots

### PICTOGRAMS



BC14-01303





BC14-01301






BC14-01304



BC14-01307

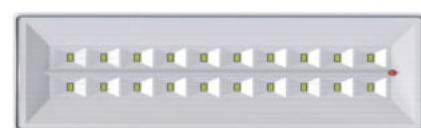

MODEL NO	BC14-00900
BODY COLOR	White
WATT	5W
VOLTAGE	220V-240VAC
EMERGENCY MODE	Maintained and Non-Maintained
WORKING TIME	180 Minutes
CHARGING TIME	24 Hours
VIEW DISTANCE	25 Mt
BATTERY	Lithium 3.7V-2200mAH
IP	IP65
CLASS	CLASS II
MATERIAL	Non-Flammable Plastic
PCS/CTN	10

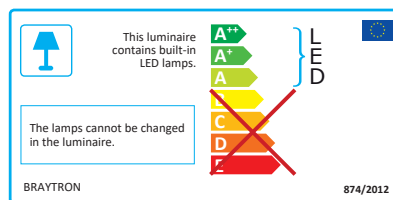

\*Technical information indicated above may have tolerance  $\pm 10\%$ . For final updated information please visit website [www.braytron.com](http://www.braytron.com)