



Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants






A⁺

LED

20,000
HOURS2 YEARS
WARRANTY

IP40

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP02-60600	SMD-CSP	White	3000K	6W	450Lm	220V-240VAC	>80	>0.55	110°	115	Plastic	40
BP02-60610	SMD-CSP	White	4000K	6W	450Lm	220V-240VAC	>80	>0.55	110°	115	Plastic	40
BP02-60630	SMD-CSP	White	6500K	6W	450Lm	220V-240VAC	>80	>0.55	110°	115	Plastic	40
BP02-61200	SMD-CSP	White	3000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	155	Plastic	20
BP02-61210	SMD-CSP	White	4000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	155	Plastic	20
BP02-61230	SMD-CSP	White	6500K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	155	Plastic	20
BP02-61800	SMD-CSP	White	3000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	210	Plastic	20
BP02-61810	SMD-CSP	White	4000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	210	Plastic	20
BP02-61830	SMD-CSP	White	6500K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	210	Plastic	20

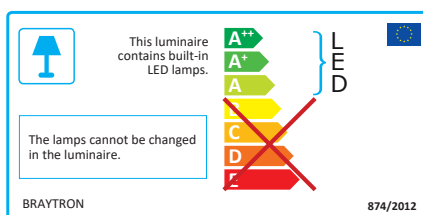

CE ENEC

LVD

EMC

ErP

RoHS

Hg 0.0mg

IP40

Non-Flammable

Life Span > 25,000

-20°C ~ +40°C

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com