



Separatoare pentru siguranțe cilindrice

230/400 V AC	50/60 Hz	 U_i 800 V	 35x7.5	T_a  -25...+55°C	 2000 m	 [mm ²] 1,5-6	IP 20
-----------------	----------	--	--	---	--	---	------------------------

TRACON	xP 	I_n (A)	 mm ²		
CFBL1P32	1P	32 A	0,75-25	10 × 38	
CFBL2P32	2P				
CFBL3P32	3P				
CFBL1P+N32	1P+N				
CFBL3P+N32	3P+N				
CFBL1P50	1P	50 A	1,5-35	14 × 51	
CFBL2P50	2P				
CFBL3P50	3P				
CFBL1P+N50	1P+N				
CFBL3P+N50	3P+N				
CFBL1P100	1P	100 A	1,6-50	22 × 58	
CFBL2P100	2P				
CFBL3P100	3P				
CFBL1P+N100	1P+N				
CFBL3P+N100	3P+N				

*Siguranțe fuzibile care pot fi utilizate: HB- _x_ - _

- Categoria de utilizare AC-20B
- Pentru siguranțe cilindrice cu caracteristică gG (normală) și aM (pentru motoare)
- Variante constructive cu 1P, 2P, 3P, 1P+N și 3P+N
- Capacitate de rupere nominală la scurtcircuit: AC 500 V; 100 kA
AC 690 V; 50 kA
- Materialul carcasei: Material plastic ignifug
- seria EN 60269
- Toate mărimile pot fi instalate în cutii modulare
- Pot fi plombate



CFBL1P32




CFBL1P100




CFBL2P32

RELEVANT STANDARD
EN60269-1


RELEVANT STANDARD
HD60269-2



CFBL_P32



CFBL_P50

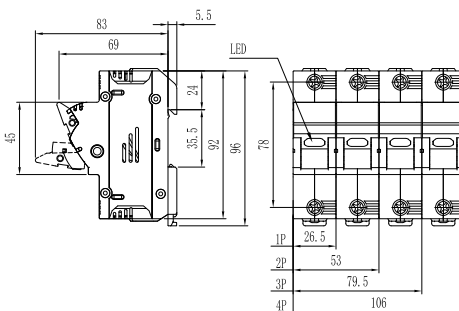

CFBL_P100

