

## Various cable entry push-in and it's done



- cable entry via integrated elastic membranes in box walls for fast cable entry up to degree of protection IP 66



- alternatively, a cable gland can be set after removing the elastic membrane and extension ring



- cable entry through the bottom of the box via integrated elastic membrane

## Modern terminal technology innovative und flexibel



- different terminal positions and mounting options
- up to enclosure size 10 mm<sup>2</sup> two terminal bars can be mounted in one box, even different terminal sizes are possible



- High-positioned terminals offer more space for wiring - as well when connecting the maximum number of conductors
- protected against accidental loosening



- all terminals with two clamping units per pole
- all terminals with two clamping units per pole
- every pole allows the connection of various conductor cross sections and conductor types

## Lots of accessories perfectly included



- external brackets for fastening are always included



- retaining strap prevents the lid from falling or losing and makes daily installation work easier



- closes quickly by a quarter turn, closed position is easily visible
- Easy identification using label as accessories

**DK Cable junction boxes**

For normal environment and protected outdoor installation  
Cable entry via metric knockouts




**DK 1610 G** NEW

**4-10 mm<sup>2</sup>, Cu 3~**

- terminal with 2 clamping units per pole
- 5-pole per pole 6 x 2.5 mm<sup>2</sup> sol, 4 x 4 mm<sup>2</sup> sol, 4 x 6 mm<sup>2</sup> sol, 4 x 10 mm<sup>2</sup> sol, 2 x 16 mm<sup>2</sup> s
- included cable entry: 3 ESM 40, sealing range Ø 17-30 mm
- with two cable entries M 32 from the rear side
- lid fasteners sealable without accessories
- external brackets for wall fixing included

rated insulation voltage	U <sub>i</sub> = 690 V a.c./d.c.
current carrying capacity	63 A
tightening torque for terminal	2.0 Nm
material	PC (polycarbonate)

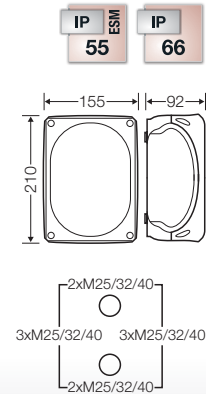


**DK 1616 G** NEW

**10-16 mm<sup>2</sup>, Cu 3~**

- terminal with 2 clamping units per pole
- 5-pole per pole 6 x 6 mm<sup>2</sup> sol, 6 x 10 mm<sup>2</sup> sol/ f\*, 4 x 16 mm<sup>2</sup> s/ f\*, 4 x 25 mm<sup>2</sup> s/ f\*, 2 x 35 mm<sup>2</sup> s/ f\*  
f\* = with gas-tight end ferrule
- included cable entry: 3 ESM 40, sealing range Ø 17-30 mm
- with two cable entries M 32 from the rear side
- lid fasteners sealable without accessories
- external brackets for wall fixing included

rated insulation voltage	U <sub>i</sub> = 690 V a.c./d.c.
current carrying capacity	102 A
tightening torque for terminal	3.0 Nm
material	PC (polycarbonate)



**DK 2525 G** NEW

**10-25 mm<sup>2</sup>, Cu 3~**

- terminal with 2 clamping units per pole
- 5-pole per pole 6 x 6 mm<sup>2</sup> sol, 6 x 10 mm<sup>2</sup> sol/ f\*, 4 x 16 mm<sup>2</sup> s/ f\*, 4 x 25 mm<sup>2</sup> s/ f\*, 2 x 35 mm<sup>2</sup> s/ f\*  
f\* = with gas-tight end ferrule
- included cable entry: 3 ESM 40, sealing range Ø 17-30 mm
- with two cable entries M 32 from the rear side
- lid fasteners sealable without accessories
- external brackets for wall fixing included

rated insulation voltage	U <sub>i</sub> = 690 V a.c./d.c.
current carrying capacity	102 A
tightening torque for terminal	3.0 Nm
material	PC (polycarbonate)

