



COUPLING - IP40

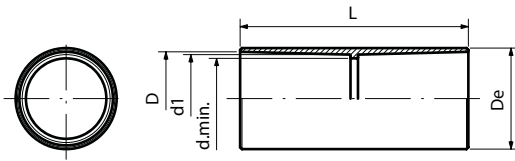


Code	For conduits \varnothing (mm)	D	De	d. min	d1	L
DX 40 016	16	16.2	20	14.5	16	80
DX 40 020	20	20.2	24	17.8	19.7	81
DX 40 025	25	25.3	29	23.1	24.9	81
DX 40 032	32	32.3	37	29.5	31.7	102
DX 40 040	40	40.3	45	37.4	39.7	111.5
DX 40 050	50	50.3	55	46.7	49.7	122
DX 40 063	63	63.3	68	60	62.7	130

TIGHT BEND - IP40

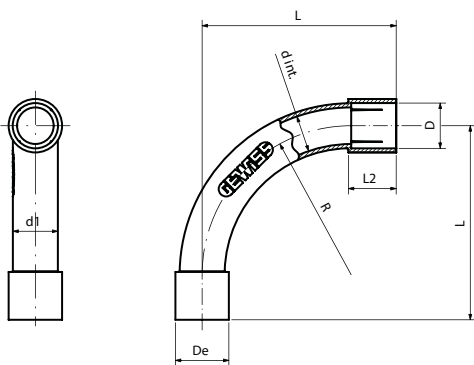


Code	For conduits \varnothing (mm)	D	De	d. min	D1	R	L2	L		
DX 40 116	16	16.1	+0.2 0	19	13	16	0 -0.3	53	17	64
DX 40 120	20	20.1	+0.2 0	23	17	20	0 -0.3	65	20	79
DX 40 125	25	25.1	+0.3 0	28	22	25	0 -0.4	80	28	100
DX 40 132	32	32.1	+0.3 0	35	29	32	0 -0.4	95	32	110
DX 40 140	40	40.1	+0.4 0	44	36	40	0 -0.4	120	40	138
DX 40 150	50	50.1	+0.4 0	54	46	50	0 -0.5	140	50	173
DX 40 163	63	63.1	+0.6 0	68	55	63	0 -0.6	157	63	253

INSPECTABLE T - IP40

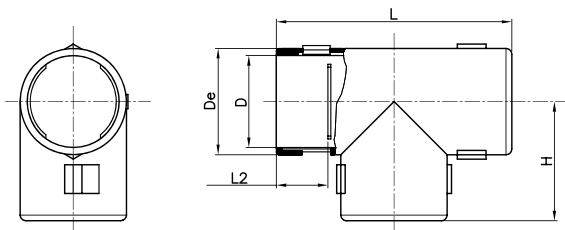

Code	For conduits \varnothing (mm)	D	De	L	H	L2
DX 40 216	16	16.1	20	65	32.5	17
DX 40 220	20	20.1	24.5	70.5	35.25	17.5
DX 40 225	25	25.1	30	75.5	37.75	18.5
DX 40 232	32	32.1	37	82.3	41.15	18.5

INSPECTABLE BEND - IP40

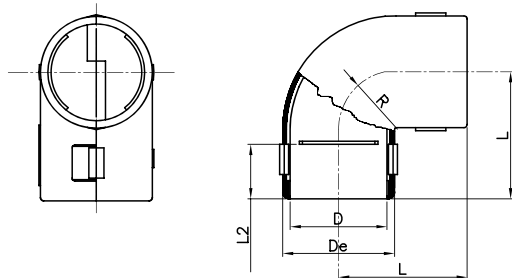

Code	For conduits \varnothing (mm)	D	De	L	R	L2
DX 40 316	16	16.1	20	32	11	17
DX 40 320	20	20.1	24.5	33	14	17
DX 40 325	25	25.1	30	39	18	18
DX 40 332	32	32.1	37	42	22	18

COUPLING DEVICES FOR RIGID CONDUITS

RK UNIONS - GREY RAL 7035



DX 40 016

COUPLING - IP40



Code	Conduits Ø (mm)	Pack Carton
DX 40 016	16	30/300
DX 40 020	20	30/450
DX 40 025	25	20/240
DX 40 032	32	10/100
DX 40 040	40	5/25
DX 40 050	50	15
DX 40 063	63	8

NOTE: DX40063 not Halogen Free.



DX 40 116

TIGHT BEND - IP40



Code	Conduits Ø (mm)	Pack Carton
DX 40 116	16	30/300
DX 40 120	20	30/300
DX 40 125	25	20/100
DX 40 132	32	10/50
DX 40 140	40	5/25
DX 40 150	50	10
DX 40 163	63	1

NOTE: DX40163 not Halogen Free.



DX 40 216

INSPECTABLE T - IP40

Code	Conduits Ø (mm)	Pack Carton
DX 40 216	16	30/120
DX 40 220	20	30/120
DX 40 225	25	20/60
DX 40 232	32	10/30



DX 40 316

INSPECTABLE BEND - IP40

Code	Conduits Ø (mm)	Pack Carton
DX 40 316	16	30/180
DX 40 320	20	30/120
DX 40 325	25	20/60
DX 40 332	32	10/40