

UPS LINE INTERACTIVE




UPS ONLINE DUBLA CONVERSIE

CARACTERISTICI

- culoare: negru
- carcasa plastic
- display LCD
- mod economic si inteligent de functionare
- restart automat
- online static bypass
- aplicatii: electronice / electrocasnice / echipament medical / sisteme de securitate
- optional: interfata via Smart USB: Windows (XP, 7, 8, 10), Linux, Unix, BSD

PROTECTIE

- protectie complet 6: suprasarcina, supratensiune, supraincarcare, descarcare electrica & scurt-circuit

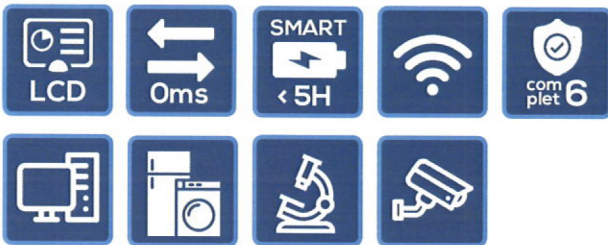

APLICATII



SPECIFICATII TEHNICE



OPTIUNEA 1050VA

OPTIUNEA 2050VA

OPTIUNEA 3050VA

Electric



Fizic

	OPTIUNEA 1050VA	OPTIUNEA 2050VA	OPTIUNEA 3050VA
Putere	1000W	2000W	3000W
Tensiune / Frecventa intrare		120V-300V AC / 45Hz-55Hz	
THDi		<5% la sarcina max.	
Tensiune / Frecventa iesire		230V AC / 50Hz	
Distorsie Armonica		THD < 5% non-liniar; THD < 3% liniar	
Unda / Factor de putere		sinusoidala pura / ~1	
Timp de transfer		0ms	
Capacitate suprasarcina		< 130%: 30s; > 130% 0.2s;	
Conectori iesire		2x Schuko + RS232	
Tip Acumulator	2x 12V / 7.1Ah	6x 12V / 7.1Ah	6x 12V / 9.1Ah
Timp de back-up (100%)		10min	
Timp de re-incarcare		< 5h	
Dimensiuni (L x l x i)	145 x 220 x 405 mm	195 x 330 x 455 mm	
Greutate	12kg	26kg	27kg
Nivel zgomot	< 40dB	< 50dB	
Temperatura functionare		0°C pana la 40°C	
Umiditate functionare		0-90% fara condens	
Cod produs	A0060008	DZ085375	DZ088394