

UPS LINE INTERACTIVE






CARACTERISTICI

- culoare: negru
- carcasa plastic
- display LCD | versiunea 700VA la alegere: LED sau LCD
- mod economic de functionare
- restart automat
- pornire inteligenta in modul DC (functie Cold Start)
- aplicatii: calculatoare / electronice / electrocasnice / servere / sisteme de securitate

APLICATII

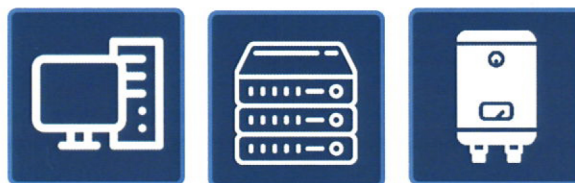

PROTECTIE

- protectie complet 6: suprasarcina, supratensiune, supraincarcare, descarcare electrica & scurt-circuit

SPECIFICATII TEHNICE

	OPTIUNEA 700VA	OPTIUNEA 900VA	OPTIUNEA 1100VA	OPTIUNEA 1300VA	OPTIUNEA 1600VA
Putere	400W	500W	600W	750W	900W
Tensiune / Frecventa intrare	140-290V AC / 45-65Hz				
Tensiune / Frecventa iesire	230V / 50Hz				
Conectori iesire	2x Schuko		4x Schuko		
Unda	sinusoidala simulata				
Timp de transfer	< 9ms				
Tip Acumulator	12V / 7.1Ah	12V / 9.1Ah	24V / 7.1Ah	24V / 7.1Ah	24V / 9.1Ah
Timp de back-up (120W)	15min	25min	35min		55min
Timp de re-incarcare	7-15h				
Dimensiuni (L x l x i)	310 x 95 x 140 mm		345 x 145 x 165 mm		
Greutate	5kg	5.8kg	11kg	12.8kg	14.8kg
Nivel zgomot	< 40dB				
Temperatura functionare	0° C pana la 40° C				
Umiditate functionare	0-90% fara condens				
Cod produs	DZ088389	DZ088390	DZ088391	DZ088392	DZ088393

electric



fizic

SPECIFICATII TEHNICE

	OPTIUNEA 2100VA	OPTIUNEA 2200VA	OPTIUNEA 3100VA
Putere	1200W	1250W	1800W
Tensiune / Frecventa intrare	140-290V AC / 45-65Hz		
Tensiune / Frecventa iesire	230V / 50Hz		
Conectori iesire	2 x Schuko	3x Schuko	
Unda	sinusoidala simulata		
Timp de transfer	< 9ms		
Tip Acumulator	24V / 9.1Ah	48V / 7.1Ah	48V / 9.1Ah
Timp de back-up (120W)	55min	95min	135min
Timp de re-incarcare	7-15h		
Dimensiuni (L x l x i)	330 x 123 x 186 mm	395 x 145 x 210 mm	
Greutate	15kg	18kg	20kg
Nivel zgomot	< 40dB		
Temperatura functionare	0° C pana la 40° C		
Umiditate functionare	0-90% fara condens		
Cod produs	A0112389	DZ088402	A0058831

electric



fizic