





























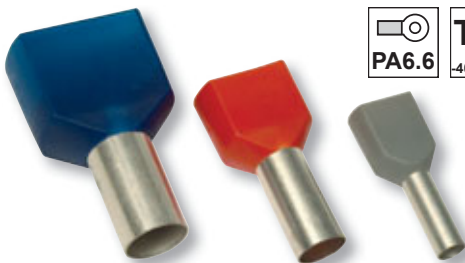








Tub de capăt (cap terminal) dublu, izolat





TRACON		 mm ²	d ₁ (mm)	d ₂ (mm)	L (mm)	l (mm)	S ₁ (mm)	S ₂ (mm)
 E20I		2 × 0.5	1.5	4.7	15	8	0.2	0.5
 E50I		2 × 0.75	1.8	5	16	8	0.2	0.4
 E50IH		2 × 0.75	1.8	5	17.5	10	0.2	0.5
 E90I		2 × 1.0	2.3	5.4	15	8	0.15	0.3
 E90IH		2 × 1.0	2.3	5.4	18	10	0.2	0.5
 E13IR		2 × 1.5	2.3	6.5	16	8	0.2	0.4
 E13I		2 × 1.5	2.3	6.5	20	12	0.15	0.3
 E16IR		2 × 2.5	2.8	7.8	20	10	0.2	0.5
 E16I		2 × 2.5	2.8	7.8	22.5	13	0.2	0.5
 E19I		2 × 4.0	3.8	9	23.5	12	0.2	0.5
 E22I		2 × 6.0	4.9	10.2	25.5	14	0.2	0.4
 E24I		2 × 10.0	6.5	13	26.5	14	0.2	0.5
 E26I		2 × 16.0	8.3	18.7	32	14	0.3	0.5



RELEVANT STANDARD
EN 61238-1
MSZ-05-45.1601-26

Conexiuni prin torsiune

TRACON	 mm ²	 mm	D (mm)	L (mm)
 TFM1	0.5-1.5	10	8.6	15
 TFM2	0.75-2.5	10	9.7	17.3
 TFM3	1-4	10	11.1	21
 TFM4	1.5-6	10	14	24.7



RELEVANT STANDARD
EN 60998-1

RELEVANT STANDARD
EN 60998-2-4



Tip de conductor: cupru, rigid