

Condensatori pentru Motoare cu Cablu



COD		DENUMIRE	PACK. (buc)
dablerom	producator		
32-100	F1M40020PC	2mF - 30x56mm	1/125
32-101	F1M40030PC	3mF - 30x56mm	1/125
32-102	F1M40040PC	4mF - 30x56mm	1/125
32-103	F1M40050PC	5mF - 30x56mm	1/125
32-104	F1M40060PC	6mF - 30x56mm	1/125
32-105	F1M40080PC	8mF - 30x70mm	1/100
32-106	F1M40100PC	10mF - 30x70mm	1/100
32-107	F1M40120PC	12mF - 35x70mm	1/50
32-108	F1M40140PC	14mF - 35x70mm	1/50
32-109	F1M40150PC	15mF - 35x70mm	1/50
32-110	F1M40160PC	16mF - 35x70mm	1/50
32-111	F1M40180PC	18mF - 40x70mm	1/50
32-112	F1M40200PC	20mF - 40x70mm	1/50
32-113	F1M40250PC	25mF - 40x92mm	1/50
32-114	F1M40300PC	30mF - 40x92mm	1/50
32-115	F1M40350PC	35mF - 45x92mm	1/25
32-116	F1M40400PC	40mF - 45x92mm	1/25
32-117	F1M40450PC	45mF - 50x92mm	1/25
32-118	F1M40500PC	50mF - 45x117mm	1/25
32-119	F1M40550PC	55mF - 45x117mm	1/25
32-120	F1M40600PC	60mF - 50x117mm	1/25
32-121	F1M40700PC	70mF - 50x117mm	1/25
32-122	F1M40800PC	80mF - 55x120mm	1/25

400/450V AC
50-60Hz

cu cablu : 250mm

400/425V = 10.000h
450/475V = 3.000h

-25°C ... +85°C


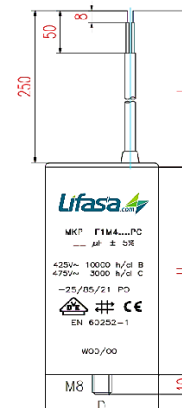


FIG 2



Condensatori pentru Motoare cu Terminale Terminali



COD		DENUMIRE	PACK. (buc)
dablerom	producator		
32-130	F140020PC	2mF - 30x56mm	1/125
32-131	F140030PC	3mF - 30x56mm	1/125
32-132	F140040PC	4mF - 30x56mm	1/125
32-133	F140050PC	5mF - 30x56mm	1/125
32-134	F140060PC	6mF - 30x56mm	1/125
32-135	F140080PC	8mF - 30x70mm	1/100
32-136	F140100PC	10mF - 30x70mm	1/100
32-137	F140120PC	12mF - 35x70mm	1/50
32-138	F140140PC	14mF - 35x70mm	1/50
32-139	F140150PC	15mF - 35x70mm	1/50
32-140	F140160PC	16mF - 35x70mm	1/50
32-141	F140180PC	18mF - 40x70mm	1/50
32-142	F140200PC	20mF - 40x70mm	1/50
32-143	F140250PC	25mF - 40x92mm	1/50
32-144	F140300PC	30mF - 40x92mm	1/50
32-145	F140350PC	35mF - 45x92mm	1/25
32-146	F140400PC	40mF - 45x92mm	1/25
32-147	F140450PC	45mF - 50x92mm	1/25
32-148	F140500PC	50mF - 45x117mm	1/25
32-149	F140550PC	55mF - 45x117mm	1/25
32-150	F140600PC	60mF - 50x117mm	1/25
32-151	F140700PC	70mF - 50x117mm	1/25
32-152	F140800PC	80mF - 55x120mm	1/25
32-153	F140999PC	100mF - 60x120mm	1/20

400/450V AC
50-60Hz

cu terminale terminali:
6.35mm

400/425V = 10.000h
450/475V = 3.000h

-25°C ... +85°C




FIG 1

