




GS4

For R4N

Screw terminals
 Max. tightening moment for the terminal: 0,7 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 67 x 30,8 x 30 (~63,7) mm 
 Four poles
 10 A, 300 V AC




Connection diagram



Accessories


Dimensions

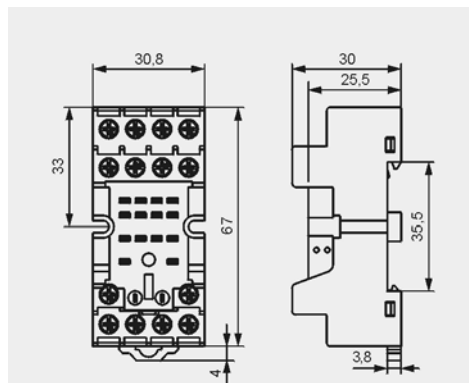


SU4D

For R4N

For PCB
 29,6 x 21,5 x 11 mm
 Four poles
 6 A, 250 V AC




Pinout



Accessories

G4 1053

Dimensions

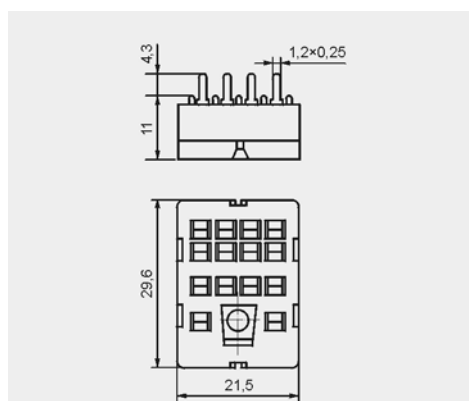


SU4L

For R4N

Solder terminals
 29,6 x 21,5 x 18,1 mm
 Four poles
 6 A, 250 V AC



Dimensions of opening on panel mounting




Accessories

G4 1053



G4 1040


Dimensions

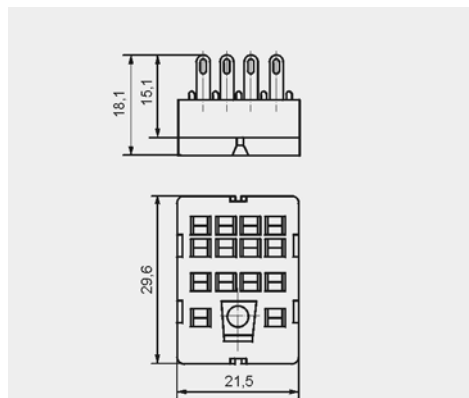


G4

For R4N

Solder terminals
 40,5 x 21,5 x 18,1 mm
 Four poles
 6 A, 250 V AC




Pinout of openings on panel mounting



Accessories

G4 1053

Dimensions

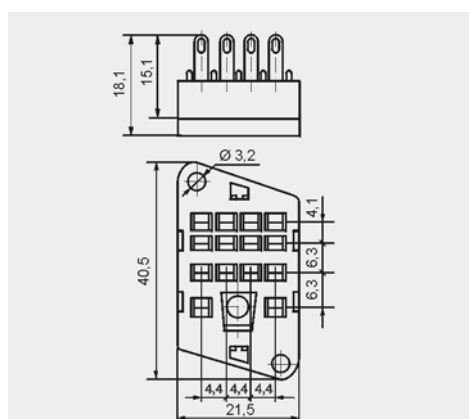

 In the bracket the height of socket with spring wire clip is shown.