

SOCKET-OUTLETS FOR DEDICATED LINES - ITALIAN/GERMAN STANDARD



GW 10 213

ITALIAN STANDARD SOCKET-OUTLET FOR DEDICATED LINES - 250V AC

Code	Description	Colour	Socket-out type	For plug pins	No. Chorus modules	Pack Carton
GW 10 213	2P+E - 16 A Dual amperage	Red	P11-P17	Ø 4 / 5 mm	1	12/24
GW 10 223	2P+E - 16 A Dual amperage	Green	P11-P17	Ø 4 / 5 mm	1	12/24
GW 10 233	2P+E - 16 A Dual amperage	Orange	P11-P17	Ø 4 / 5 mm	1	12/24

CHARACTERISTICS: with safety shields.



GW 10 214

ITALIAN/GERMAN STANDARD SOCKET-OUTLET FOR DEDICATED LINES - 250V AC

Code	Description	Colour	Socket-out type	For plug pins	No. Chorus modules	Pack Carton
GW 10 214	2P+E - 16 A Dual amperage illuminable	Red	P40	Ø 4 / 4.8 / 5 mm	2	6/12
GW 10 224	2P+E - 16 A Dual amperage illuminable	Green	P40	Ø 4 / 4.8 / 5 mm	2	6/12
GW 10 234	2P+E - 16 A Dual amperage illuminable	Orange	P40	Ø 4 / 4.8 / 5 mm	2	6/12

CHARACTERISTICS: with safety shields. Pit of side and central earth contacts. Pre-arranged for housing LED signalling units, not included.

APPLICATIONS: possibility to indicate presence of auxiliary network.

SOCKET-OUTLETS - GERMAN STANDARD



GW 10 241

GERMAN STANDARD SOCKET-OUTLET - 250V AC

Code	Description	For plug pins	No. Chorus modules	Pack Carton
GW 10 241	2P+E - 16A	Ø 4.8 mm	2	6/48

CHARACTERISTICS: with safety shields.




GW 10 242

GERMAN STANDARD SOCKET-OUTLET WITH LID IP40 - 250 V AC


Code	Description	For plug pins	No. Chorus modules	Pack Carton
GW 10 242	2P+E - 16A	Ø 4.8 mm	2	6/48

CHARACTERISTICS: with safety shields. Equipped with a transparent rigid cover with a glossy finish. IP40 degree of protection with the cover closed.


ONE PLATES

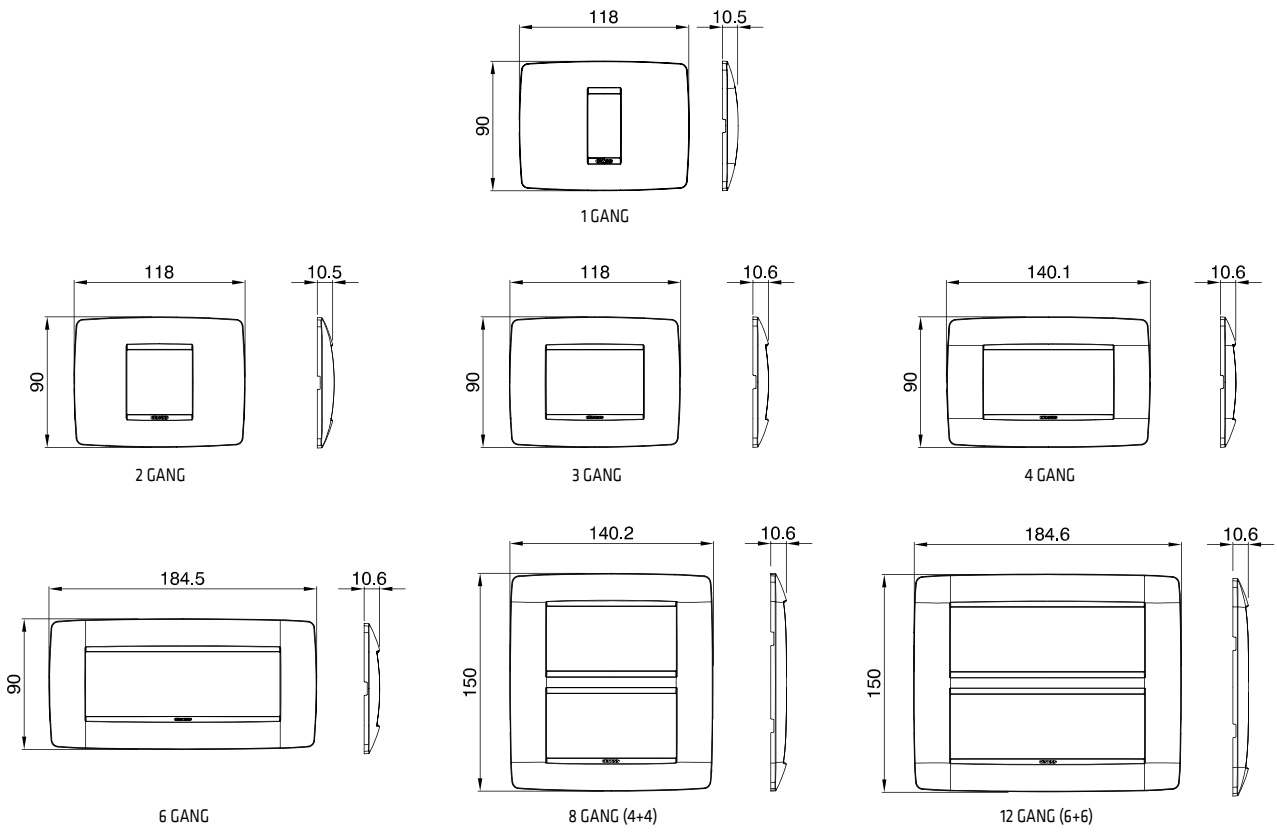


ONE INTERNATIONAL PLATES

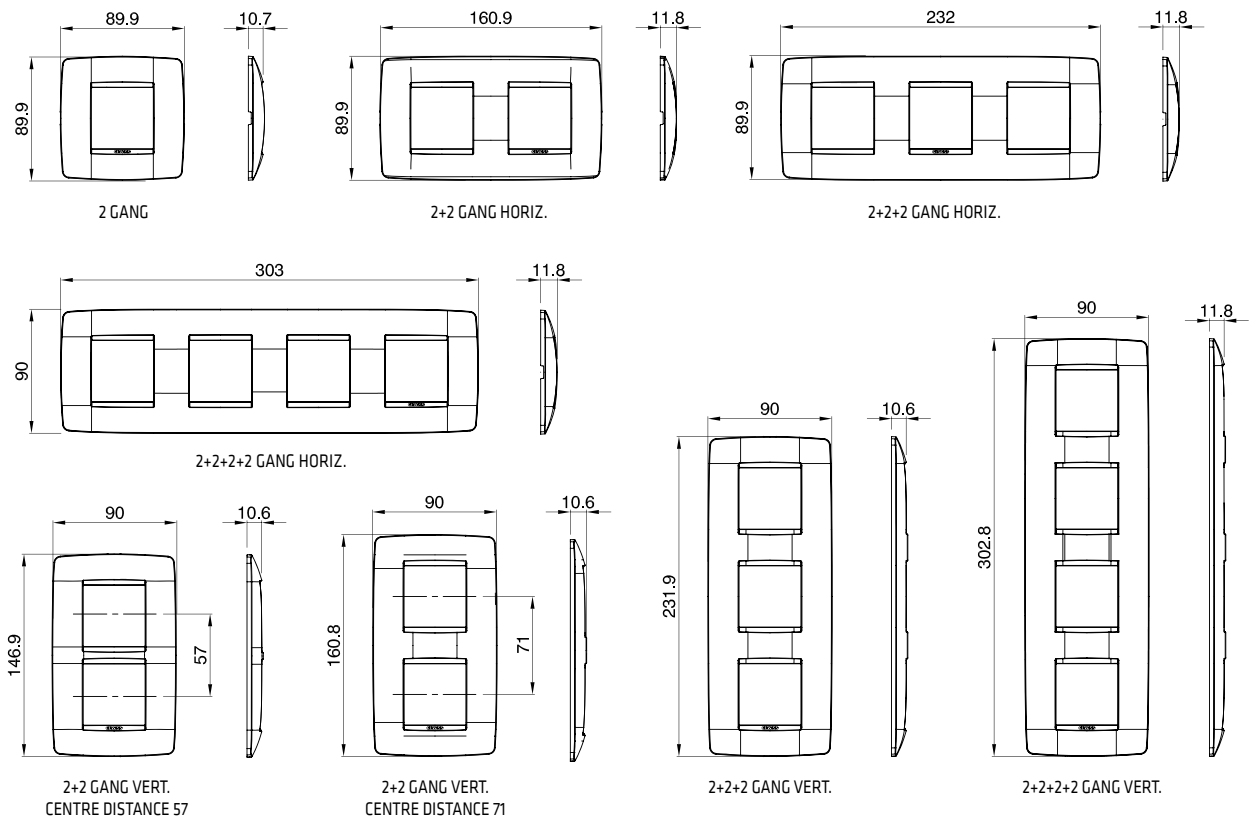





GEO PLATES

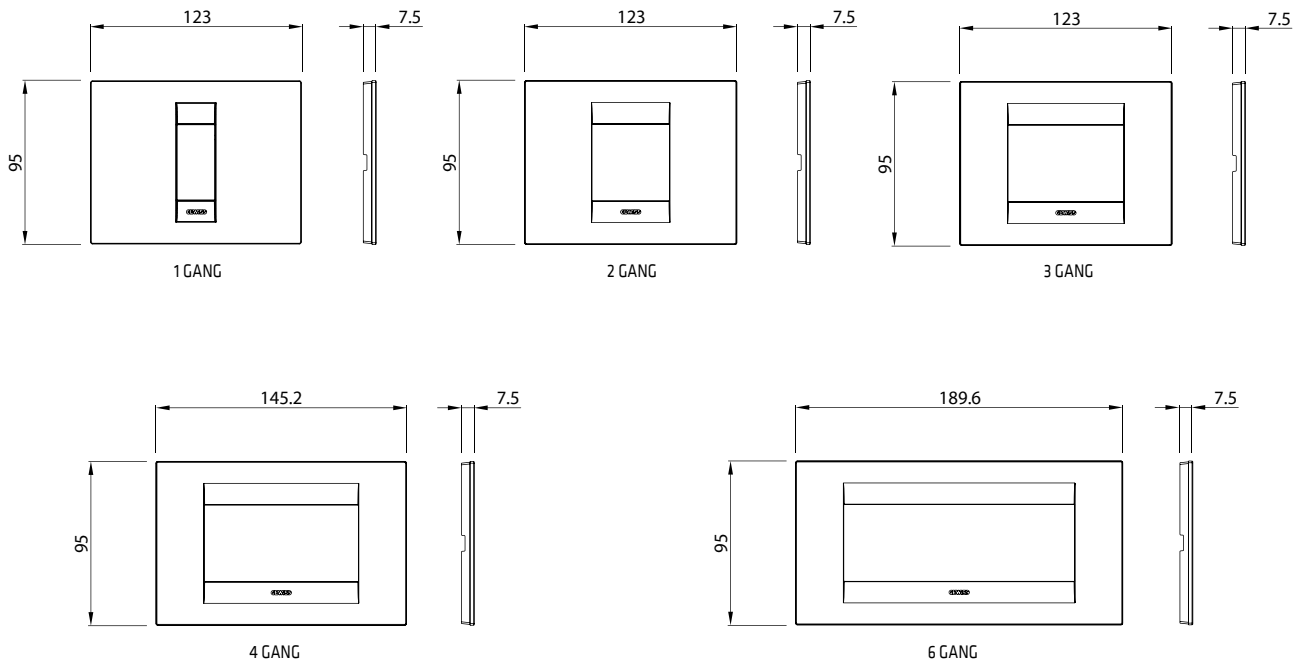

GEO INTERNATIONAL PLATES

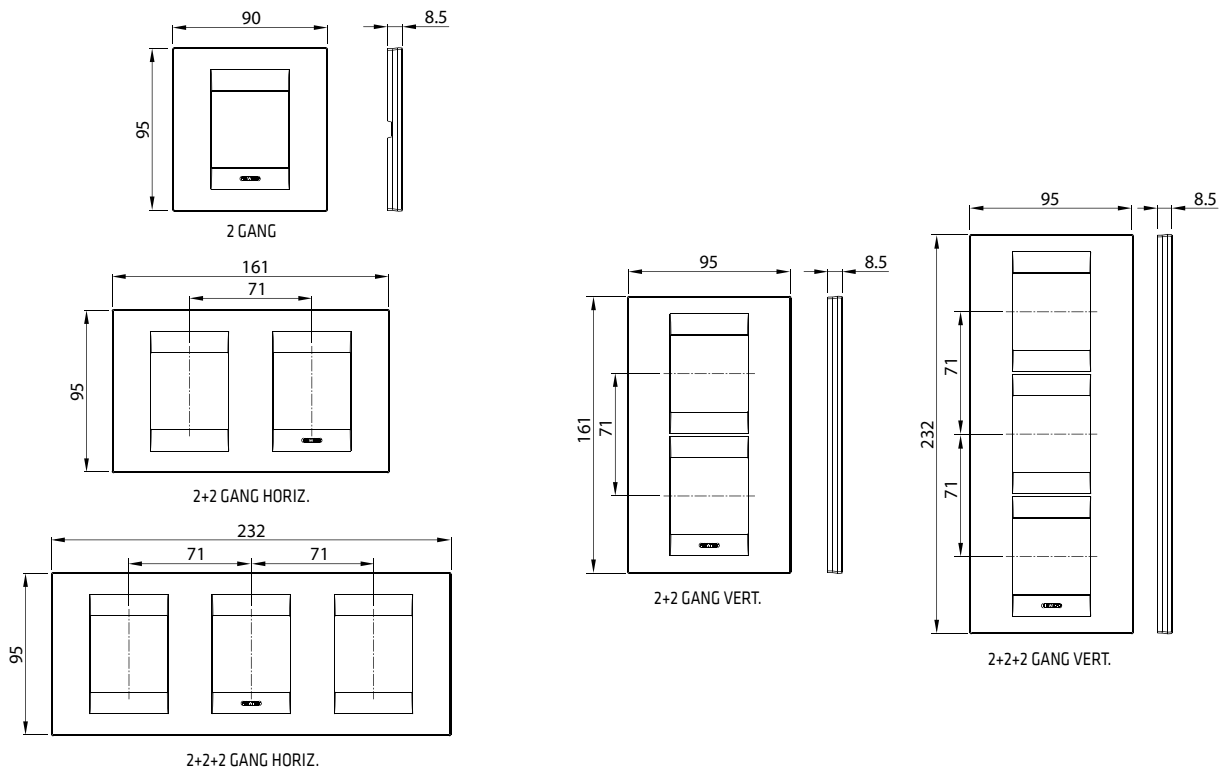

LUX PLATES

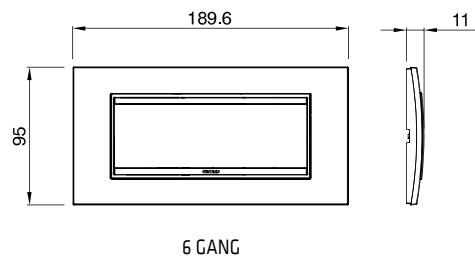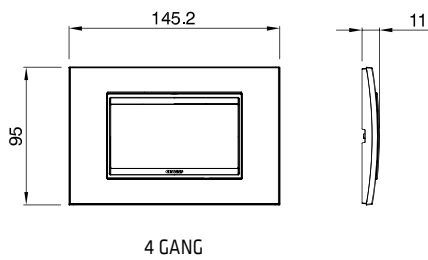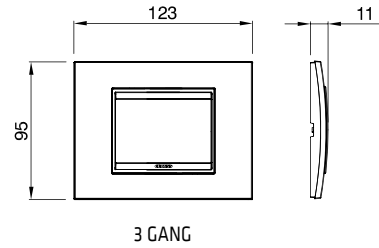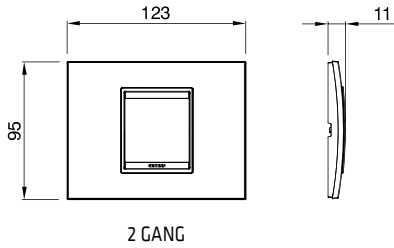

DOMESTIC RANGES

LUX INTERNATIONAL PLATES

