



GW 46 425 F

**FAST & EASY QUICK ASSEMBLY BLANK COVERING PANELS - GREY RAL 7035**



Code	For standard boards (mm)	Pack Carton
<b>Height: 1 Module</b>		
GW 46 425 F	310	1/10
GW 46 426 F	405	1/10
GW 46 427 F	515	1/13
GW 46 428 F	585	1/5
GW 46 429 F	800	1/5
<b>Height: 2 Modules</b>		
GW 46 475 F	310	1/5
GW 46 476 F	405	1/5
GW 46 477 F	515	1/5
GW 46 478 F	585	1/5
GW 46 479 F	800	1

**CHARACTERISTICS:**

GW46425F, GW46426F, GW46427F, GW46428F, GW46475F, GW46476F, GW46477F, GW46478F possibility to fix directly on the inner walls of the polyester boards. captive panel 1/4 turn sealing screws.

in all boards, the panel GW46429F and GW46479F can be fixed only with uprights GW46439F.

**ACCESSORIES SUPPLIED:** fixing accessories.



GW 46 437 F

**PAIR OF UPRIGHTS FOR INSTALLATION OF FAST & EASY QUICK ASSEMBLY TECHNICAL COMPONENTS, FOR MODULAR DEVICES, MOULDED-CASE DEVICES, SWITCH- DISCONNECTORS AND BLANK/PERFORATED PLATES H = 1 AND 2 MODULES**

Code	For boards LxH (mm)	Pack Carton
GW 46 435 F	310x425	1/10
GW 46 436 F	405x500	1/10
GW 46 437 F	405x650/515x650	1/10
GW 46 438 F	585x800	1/10
GW 46 439 F	800x1060	1/10

**ACCESSORIES SUPPLIED:** the uprights are provided with a kit with 4 inserts to be inserted in the seats located on the lower and upper horizontal surfaces. The position of the seats where the inserts have to be housed is shown on the instruction sheet inside the 46QP boards. The insert is fixed in the seat through the expansion of the plate located inside the insert, using a pin with diameter 4 mm. The uprights are installed using the 4 brackets provided with the 46QP boards.

**APPLICATIONS:** the uprights make it possible to implement extractable frames by using: panels without and with windows, perforated or non-perforated plate with height of 1 or 2 modules, MCCB or switch disconnector kits.



GW 46 431 F

**FAST & EASY QUICK ASSEMBLY DIN RAILS**

Code	No. of modules EN 50022	For standard boards (mm)	Pack Carton
GW 46 430 F	12	310	1/10
GW 46 431 F	18	405	1/10
GW 46 432 F	24	515	1/10
GW 46 433 F	28	585	1/10
GW 46 434 F	36	800	1/10

**ACCESSORIES SUPPLIED:** accessories for fixing to panel brackets.

**NOTES:** To use the DIN rails without the relative blank panel, use the GW46524F kit.

To restore the minimum degree of protection of the open door board, use the relative inner door.



GW 46 531 F

**FAST & EASY QUICK ASSEMBLY DOUBLE DIN RAILS**

Code	No. of modules EN 50022	For standard boards (mm)	Pack Carton
GW 46 530 F	12	310	1/10
GW 46 531 F	18	405	1/10
GW 46 532 F	24	515	1/10
GW 46 533 F	28	585	1/10
GW 46 534 F	36	800	1/10

**APPLICATIONS:** suitable for use with the GWFIX100 system.

**ACCESSORIES SUPPLIED:** accessories for fixing to panel brackets.

**NOTES:** the use of the double DIN rails GW46531F, GW46532F, GW46533F, GW46534F prevents the positioning of the vertical trunking.


To use the DIN rails without the relative blank panel, use the GW46524F kit.

To restore the minimum degree of protection of the open door board, use the relative inner door.

## 46 QP - QM - QX - COMMON COMPLEMENTARY ITEMS

### Dimension tables

#### FRONT CONFIGURATION

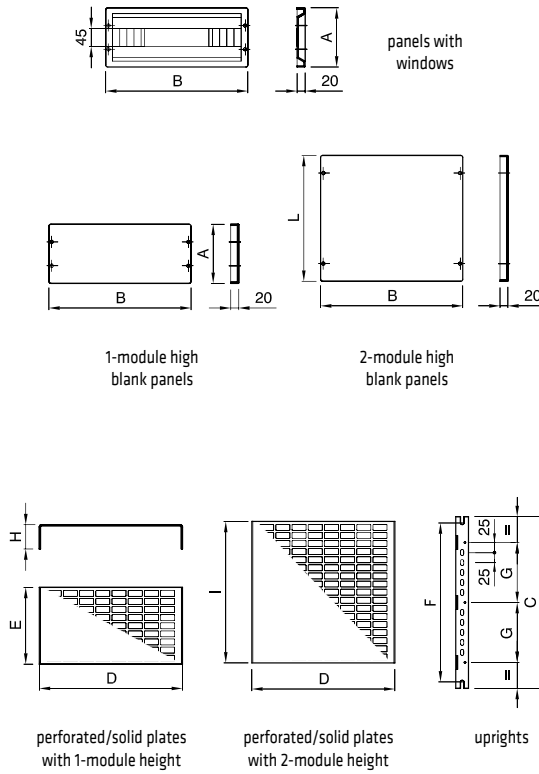

Panels with windows	-	GW 46 420 F	GW 46 421 F	GW 46 421 F	GW 46 422 F	GW 46 423 F	GW 46 424 F
Single blank panels	-	GW 46 425 F	GW 46 426 F	GW 46 426 F	GW 46 427 F	GW 46 428 F	GW 46 429 F
Double blank panels	-	GW 46 475 F	GW 46 476 F	GW 46 476 F	GW 46 477 F	GW 46 478 F	GW 46 479 F
Uprights	-	GW 46 435 F	GW 46 436 F	GW 46 437 F	GW 46 437 F	GW 46 438 F	GW 46 439 F
Single perforated plates	-	GW 46 440	GW 46 441	GW 46 441	GW 46 442	GW 46 443	GW 46 444
Single solid plates	-	GW 46 540	GW 46 541	GW 46 541	GW 46 542	GW 46 543	GW 46 544
Double perforated plates	-	GW 46 480	GW 46 481	GW 46 481	GW 46 482	GW 46 483	GW 46 484
Double solid plates	-	GW 46 580	GW 46 581	GW 46 581	GW 46 582	GW 46 583	GW 46 584
For boards with dimensions LxH (mm)	300 x 250	425 x 310	500 x 405	650 x 405	650 x 515	800 x 585	1060 x 800
Number of modules	-	12	18	18	24	28	36
A	-	124	149	149	149	149	199
B	-	265	358	358	466	538	718
C	-	355	430	580	580	730	980
D	-	170	265	265	373	445	625
E	-	116	142	142	142	142	190
F	-	327	402	552	552	702	952
G	-	125	150	150	150	150	200
H	-	40	45	45	45	45	45
I	-	241	292	292	292	292	390
L	-	249	299	299	299	299	399