

230V
50-60Hz
3p = 6h

400V
50-60Hz
4p, 5p = 6h

500V
50-60Hz
4p, 5p = 7h



3p



2P+PE

4p



3P+PE

5p



3P+N+PE

Current

Voltage

Poles

Degree of protection

Hour angle

Type

Packing pcs

Weight g/pc

Dimensions page/pic.



IRRN 1632

Current	Voltage	Poles	Degree of protection	Hour angle	Type	Packing pcs	Weight g/pc	Dimensions page/pic.
16 A	230 V	3	IP 54	6 h	IRRN 1632	6	93	26/49
16 A	400 V	4	IP 54	6 h	IRRN 1643	6	113	26/49
16 A	400 V	5	IP 54	6 h	IRRN 1653	6	127	26/49



IRRN 3253

Current	Voltage	Poles	Degree of protection	Hour angle	Type	Packing pcs	Weight g/pc	Dimensions page/pic.
32 A	230 V	3	IP 54	6 h	IRRN 3232	6	134	26/49
32 A	400 V	4	IP 54	6 h	IRRN 3243	6	157	26/49
32 A	400 V	5	IP 54	6 h	IRRN 3253	6	179	26/49



IRRB 3253

Current	Voltage	Poles	Degree of protection	Hour angle	Type	Packing pcs	Weight g/pc	Dimensions page/pic.
16 A	400 V	5	IP 54	6 h	IRRB 1653	6	114	26/50
32 A	400 V	5	IP 54	6 h	IRRB 3253	6	188	26/50



IRRNO 1653

Current	Voltage	Poles	Degree of protection	Hour angle	Type	Packing pcs	Weight g/pc	Dimensions page/pic.
16 A	400 V	5	IP 44	6 h	IRRNO 1653	6	127	26/51
32 A	400 V	5	IP 44	6 h	IRRNO 3253	6	183	26/51

Reversing built-in appliance plug allows change phases by turning the rotary part.



IRR 3253

Current	Voltage	Poles	Degree of protection	Hour angle	Type	Packing pcs	Weight g/pc	Dimensions page/pic.
16 A	400 V	5	IP 44	6 h	IRR 1653	12	174	26/52
32 A	400 V	5	IP 44	6 h	IRR 3253	12	255	26/52






IR 1632

Current	Voltage	Poles	Degree of protection	Hour angle	Type	Packing pcs	Weight g/pc	Dimensions page/pic.
16 A	230 V	3	IP 44	6 h	IR 1632	12	122	26/53
16 A	400 V	4	IP 44	6 h	IR 1643	12	144	26/53
16 A	400 V	5	IP 44	6 h	IR 1653	12	153	26/53




IR 3253


Current	Voltage	Poles	Degree of protection	Hour angle	Type	Packing pcs	Weight g/pc	Dimensions page/pic.
32 A	230 V	3	IP 44	6 h	IR 3232	12	191	26/53
32 A	400 V	4	IP 44	6 h	IR 3243	12	196	26/53
32 A	400 V	5	IP 44	6 h	IR 3253	12	235	26/53

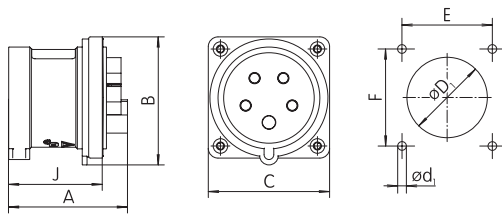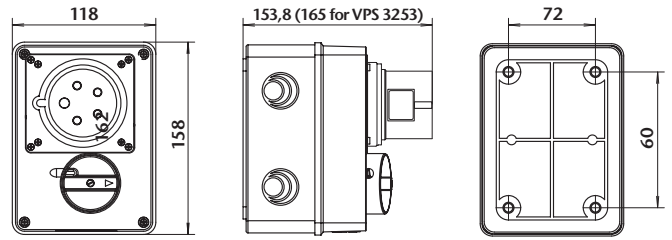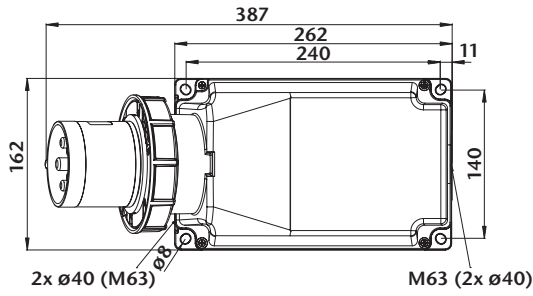


Type / mm	A	B	C	ød1	øD1	E	F	J
IRRN 1632	67	75	75	4	57	60	60	48
IRRN 1643	66	75	75	4	57	60	60	48
IRRN 1653	66	75	75	4	57	60	60	48
IRRN 3232	74	75	75	4	64	60	60	58
IRRN 3243	74	75	75	4	64	60	60	58
IRRN 3253	74	80	75	4	64	60	60	58

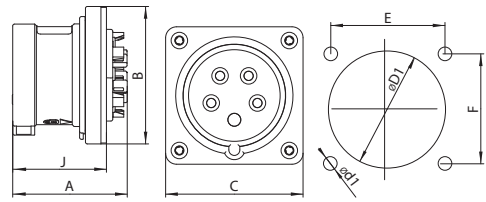

Type / mm	A	B	C	ød1	øD1	E	F	J
IRRB 1653	63	75	75	4	57	60	60	51
IRRB 3253	80	79	75	4	64	60	60	61

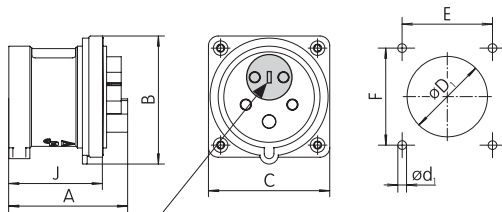


Type / mm	A	B	C	ød1	øD1	E	F	J
IRRNO 1653	66	75	75	4,2	57	60	60	48
IRRNO 3253	73	80	75	4,2	64	60	60	58

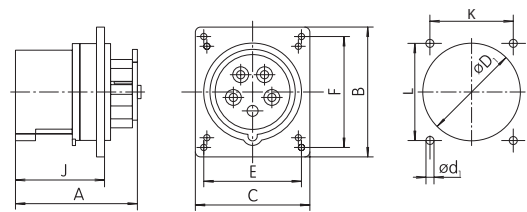


Type / mm	A	B	C	ød1	øD1	E	F	J	K	L
IRR 1653	80	85	75	4	65	64	73	58	60	60
IRR 3253	96	95	80	6	71	70	84	72	60	70

Note: Pin position can be changed by turning the screwdriver in 180 degrees and achieved the phase change.

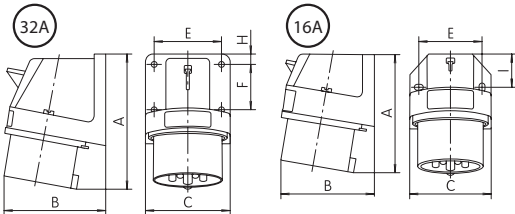

Type / mm	A	B	C	E	F	I(H)
IR 1632	91	68	57,2	45		20
IR 1643	97	77	65,2	50		27,5
IR 1653	98	79	65,2	50		27,5
IR 3232	128	88	72,5	58	40	9(H)
IR 3243	128	88	72,3	58	40	9(H)
IR 3253	129	90	72,3	58	40	9(H)



Type / mm	A	B	D	ød1	E	F	I
IRG 1632	114	74	70	4,8	45	30	15
IRG 1643	119	83	78	5,2	50	30	17,5
IRG 1653	119	85	87	5,2	50	30	17,5
IRG 3232	142	98	92,5	5,2	58	40	20
IRG 3243	142	98	92,5	5,2	58	40	20
IRG 3253	142	101	100	5,2	58	40	20