

Cylindrical fuse links

Cylindrical fuse link 10 x 38 mm for photovoltaic 900V characteristic gR




ISV10910

Schrack-Info

- Cylindrical DC-fuses according to IEC- standard sizes 10 x 38 mm
- Characteristic gR

Size:	10 x 38
Characteristic:	gR
Rated current:	6 A - 20 A
Rated voltage:	900 V-DC
Body material:	ceramic
Material of contact parts:	CuZn28, gal.Ag

10 x 38 Dimensions

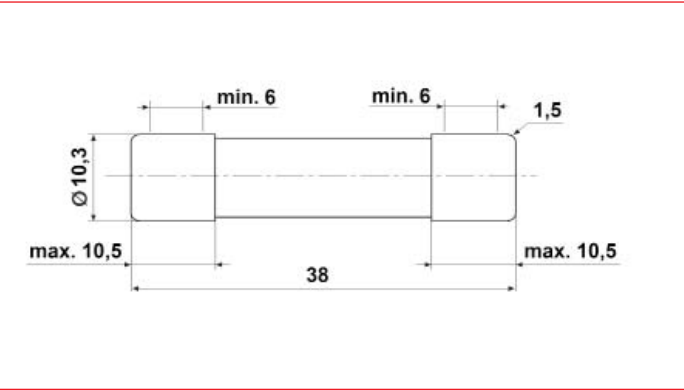

DESCRIPTION	AVAILABLE	ORDER NO.
6A, 900V, gR, 10x38		ISV10906
10A, 900V, gR, 10x38		ISV10910
12A, 900V, gR, 10x38		ISV10912
15A, 900V, gR, 10x38		ISV10915
20A, 900V, gR, 10x38		ISV10920

Cylindrical fuse link 10 x 38 mm for photovoltaic 1000V characteristic gPV



ISV10016


Schrack-Info

- Cylindrical PV-fuses according to IEC- standard sizes 10 x 38 mm
- Characteristic gPV


Size:	10 x 38
Characteristic:	gPV
Rated current:	4 A - 20 A
Rated voltage:	1000 V-DC
Body material:	ceramic
Material of contact parts:	CuZn28, gal.Ag

▀ Cylindrical fuse link 10 x 38 mm for photovoltaic 1000V characteristic gPV

▀ 10 x 38 Dimensions

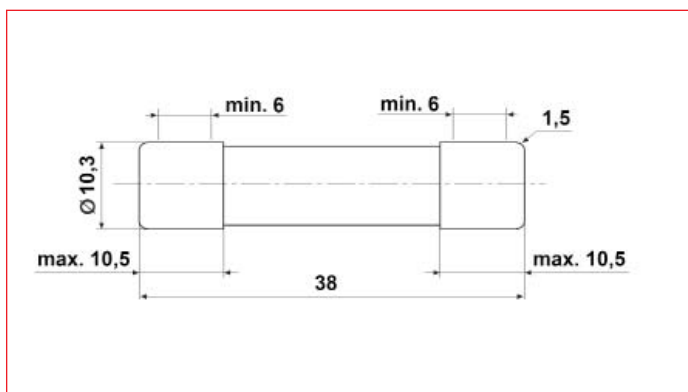

▀ 10 x 38 Characteristic gPV

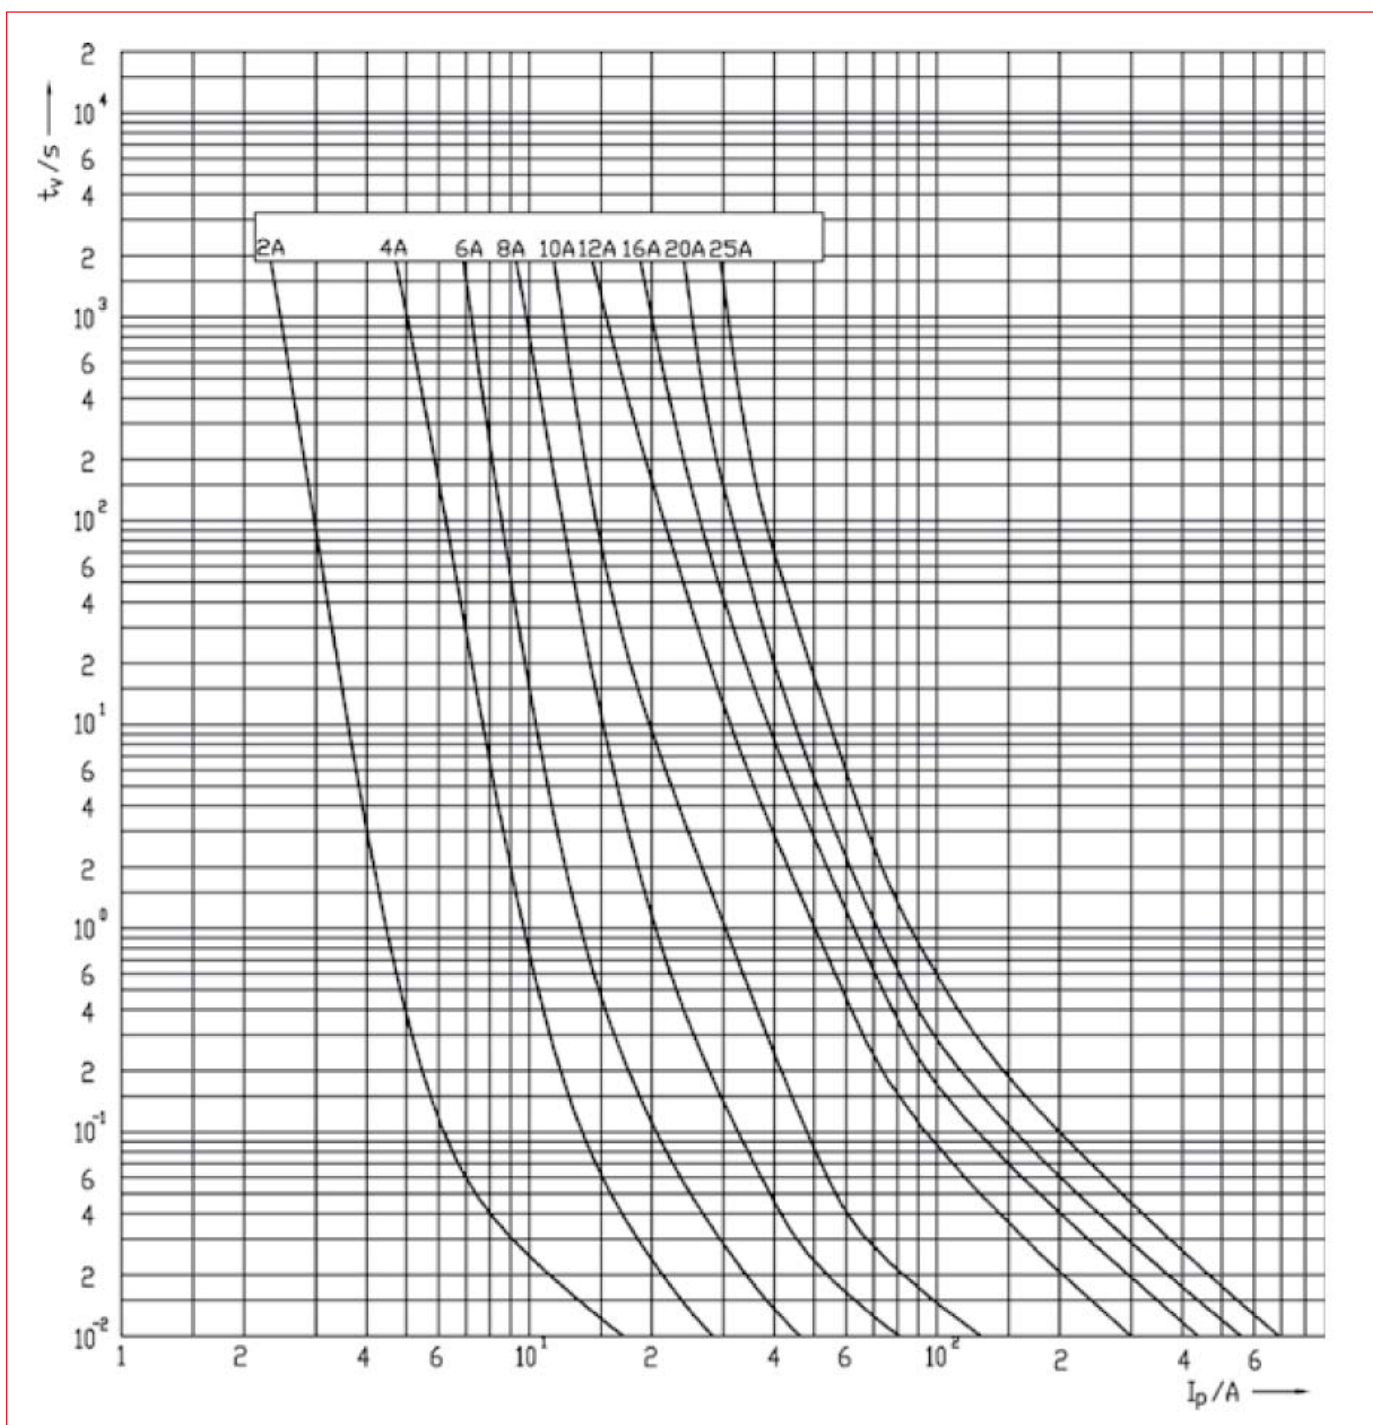

Cylindrical fuse links

■ Cylindrical fuse link 10 x 38 mm for photovoltaic 1000V characteristic gPV

DESCRIPTION	AVAILABLE	ORDER NO.
4A, 1000V, gPV, 10x38		ISV10004
6A, 1000V, gPV, 10x38		ISV10006
8A, 1000V, gPV, 10x38		ISV10008
10A, 1000V, gPV, 10x38		ISV10010
12A, 1000V, gPV, 10x38		ISV10012
16A, 1000V, gPV, 10x38		ISV10016
20A, 1000V, gPV, 10x38		ISV10020