


ITECH Z

ONE FITTING - MANY APPLICATIONS



» visibility up to 30 meters



» plug-in connection - when the fitting is opened, the voltage on its active elements is cut off


» high protection degree - IP65


» moulded high-resilience polyurethane gasket

» one-sided or double-sided view fitting


50

Dimensions [± 2mm]

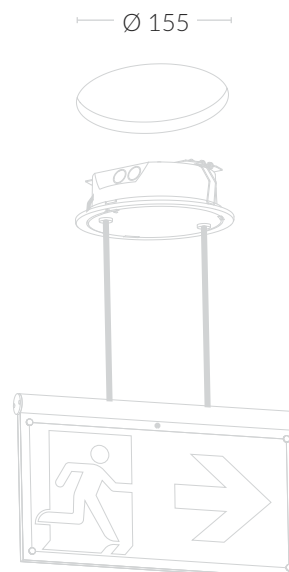


| | |
|-----------------------------|--|
| Application | evacuation road direction (evacuation sign) |
| Light source | LED  |
| Type | double-sided fitting |
| Testing for self-contained | non-addressable: ST – for button test non-addressable: AT – auto-test / self-test addressable: DATA – with addressable module for DATA system addressable: DATA 2 – with addressable module for DATA 2 system addressable: DALI – with addressable module for DALI systems |
| Testing for central battery | non-addressable: CB1 – without addressable module addressable : CB3 – with addressable module |
| Power supply | 210÷250 V AC 50÷60 Hz 186÷254 V DC |
| Protection degree | IP65 |
| Insulation class | II |
| Temperature range | ST, AT, DATA, DATA 2, DALI: $t_a +10^{\circ}\text{C} \div +40^{\circ}\text{C}$ CB1: $t_a -25^{\circ}\text{C} \div +55^{\circ}\text{C}$ CB3: $t_a -15^{\circ}\text{C} \div +40^{\circ}\text{C}$ |
| Glow wire test | 850°C |
| Colour | <input type="checkbox"/> RAL 9003 <input type="checkbox"/> RAL 7035 <input type="checkbox"/> RAL 9004 |
| Material | housing: PC/ABS |

» surface mounted

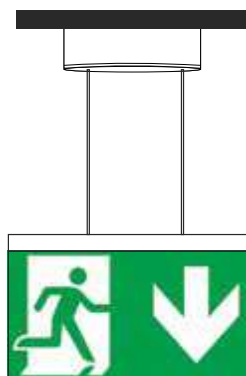


» TM-AKC.IT003

set for recessed mounting

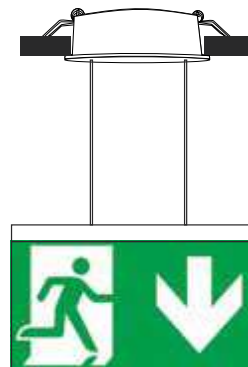

Pictograms in the set:



| Model | Mode | Time | Luminance | Battery | Testing |
|------------|--------|------|---------------------------|---------|--------------------------------|
| iTECH Z E2 | M / NM | 3 h | $\geq 150 \text{ cd/m}^2$ | LiFePO4 | ST / AT / DATA / DATA 2 / DALI |
| iTECH Z E2 | - | - | $\geq 150 \text{ cd/m}^2$ | - | CB1, CB3 |

