
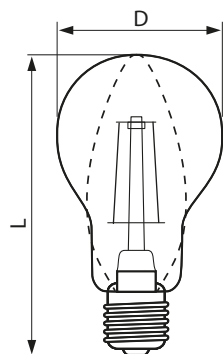


Surse de lumină la care se poate modifica fluxul luminos în 3 trepte

170-260 V AC	50/60 Hz	25.000 [h]	ON-OFF >15.000		$R_a \geq 80$	SMD LED	Hg 0 mg	 $T_{up} < 1s$	12-50-100 %	Legendă pictograme	E/5
------------------------	----------	------------	-------------------	--	---------------	----------------	------------	-------------------	----------------	---------------------------	------------

TRACON					$T_c [K]$	$[\circ]$	$D \times L (mm)$	
LGY3D6W	6 W	E14	40 W	490 lm	3.000 K	250°	37 × 102	A+
LMG453D6W	6 W	E14	40 W	510 lm	3.000 K	250°	45 × 88	A+
LA603D12W	12 W	E27	75 W	1.055 lm	3.000 K	250°	60 × 121	A+


LA603D12W

LMG453D6W

LGY3D6W

Sursă de lumină LED cu detector de mișcare încorporat

110-240 V AC	50/60 Hz	25.000 [h]	ON-OFF >15.000		$R_a \geq 80$	SMD LED	Hg 0 mg	 $T_{up} < 1s$
------------------------	----------	------------	-------------------	--	---------------	----------------	------------	-------------------

TRACON					$T_c [K]$	$[\circ]$	$[\circ]$	$D \times L (mm)$	
LA60M7NW	7 W	E27	60 W	600 lm	4.000 K	270°	360°	60 × 108	A+
LA60M7WW	7 W	E27	60 W	600 lm	2.700 K	270°	360°	60 × 108	A+

