

Distribution blocks OJL

1000 V
AC/DC

Bimetal
(Al/Cu)


Up to
400 A
240 mm²

Class A

Certified according to
standards EN 61238-1
and EN 60947-7-1



OJL busbar adapters are used for connecting OJL connectors to copper or aluminium busbars.
Materials: Tin plated copper

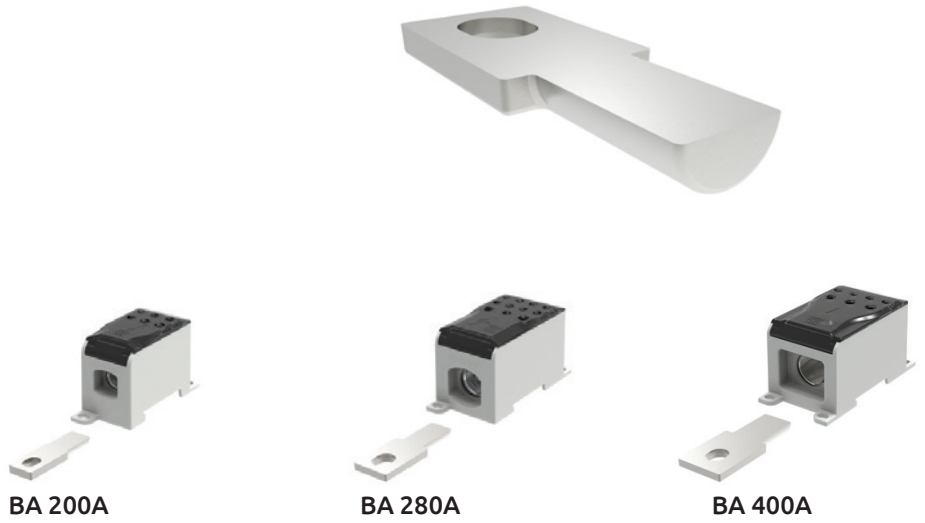

Grey	MAB1201EBA	MAB1281EBA	MAB1401EBA
------	------------	------------	------------

Technical data

D	9,8	13,8	13,8
H	5,95	7,25	9,75
H1	4,8	5	5,2
L	45	61	70
W	14	23	30
W1	6,8	10,8	10,8
Weight (g)	22	49	90
Package (pcs)	24	12	8

Dimensions

