

# Distribution blocks Moblock


Up to

**160 A**

**50 mm<sup>2</sup>**

Insulation  
between  
phases

Certified according  
to standards  
EN 60947-1  
EN 60947-7-1

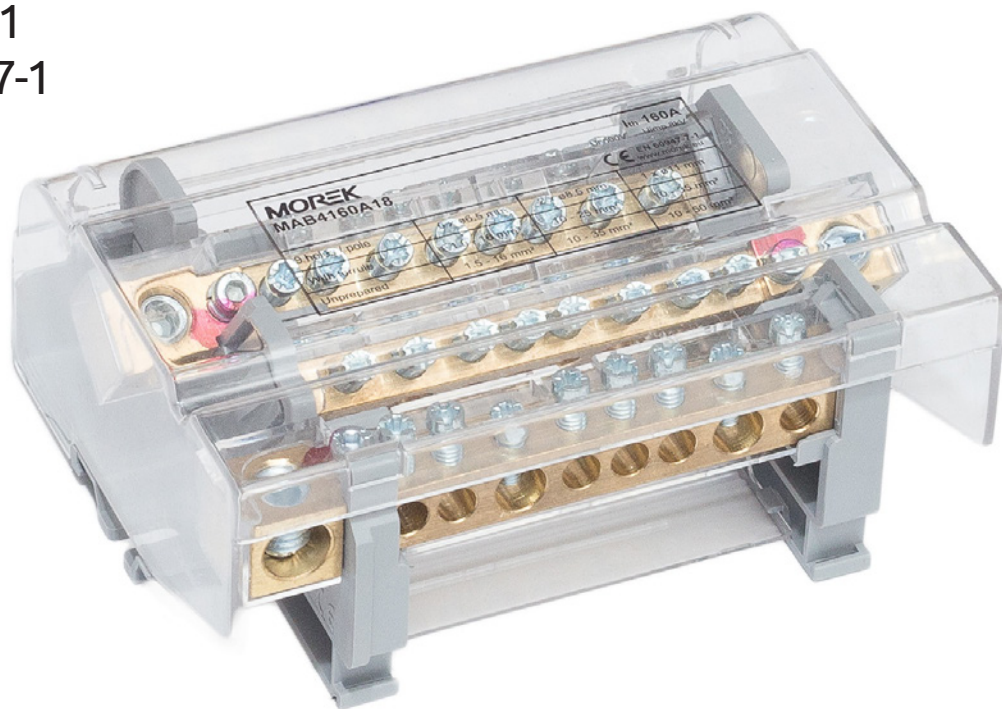

Distribution blocks Moblock are offered in two-pole (up to 35 mm<sup>2</sup> and 125A) and four-pole (up to 50 mm<sup>2</sup> and 160A) versions. Terminal blocks are placed on isolated brackets and are covered with easily removable transparent plastic cover. Terminal blocks are covered with a plastic part also from the bottom and between each busbar an insulating barrier is included.

Installation is possible on the DIN rail or panel using screws. Conductive part is made of brass, the connecting parts are made of steel, Zn galvanized.

For convenient and easy connection, the 160A type input is separated on the busbar from the outputs. Massive 50 mm<sup>2</sup> endpoint on the busbar does not limit current capacity of the block and is set into the reinforced plastic housing.



**Moblock 2P  
100A-7**

**Moblock 2P  
125A-11**

**Moblock 2P  
125A-15**

**Order code**

	MAB2100A18	MAB2125A18	MAB2126A18
--	------------	------------	------------

**Technical data**

<b>Conductor cross section (per pole)</b>			
Input wire Cu (mm <sup>2</sup> )	2 x 10 - 25	2 x 10 - 35	2 x 10 - 35
Output wire Cu (mm <sup>2</sup> )	5 x 1,5 - 6	7 x 1,5 - 6 / 2 x 10 - 25	11 x 1,5 - 6 / 2 x 10 - 25
Nominal voltage AC / DC (V)	1000	1000	1000
Nominal current (A)	100	125	125
Width / Height / Length (mm)	49 / 52 / 72	49 / 52 / 109	49 / 52 / 137
Short-circuit current peak I <sub>pk</sub> (kA)	20	19	19
Short-circuit resistance (kA / 1s)	3	4,2	4,2
Rated surge voltage (kV)	8	8	8
Min. length of insulated wire (mm)	13	13	13
Tightening torque (Nm)	2,5	2,5	2,5
Mounting	DIN rail, screw	DIN rail, screw	DIN rail, screw
Weight (g)	107	152	197
Package (pcs)	4	2	2

**Dimensions**

