



KMPv modular metal-door plastic empty enclosures, IP30

Fitted empty enclosures are for installation in residential and office rooms. These empty enclosures are notable for their unique construction ensuring convenience, fast mounting and suitability for any interior.



Advantages

- Wide range of various accessories ensuring easy and fast mounting.
- Protected from electricity stealing thanks to the possibility of sealing.
- Metal door is protected from corrosion owing to phosphatization and powder paint coating.
- Easily changing neutral buses support position.
- Universal packaging.
- Simple cable input thanks to the availability of easily dismountable side panels.
- Special empty enclosures construction provides for balancing the irregularities of surface intended for the empty enclosures mounting within 18 mm.

Technical Features:

Mounting	flush
Protection degree	IP30
Protection class	II
Body material	polystyrol
Door material	steel
Color	RAL 9016
Number of rows	from 1 to 4
Number of modules	from 14 to 56
Rated voltage, V	400
Rated frequency, Hz	50
Rated current, A	63

Advantages



Door and frame made from a steel sheet are corrosion-resistant and covered with powder paint coating.



Possibility to install detachable panels in the center for the avoidance of loss during the mounting.



Sealing holes protect from unauthorized access.



Optional installation of support with N and PE buses both from top and on bottom.



Convenient cable input thanks to the availability of a dismountable side panel.



Mounting accessories provide for time saving and fast mounting.



During the implementation of works, cables can be fixed on a special hook.



Packaging is provided with special marks helping to install the empty enclosure into the bay with great precision.

Configuration



Marking clamps



Fitting frames. Bolt screws and plastic dowels.




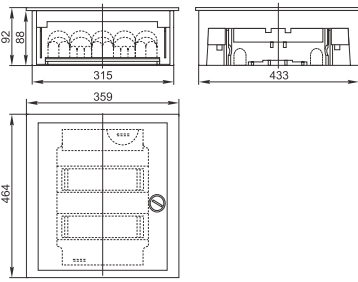

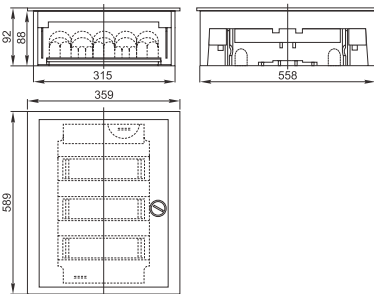

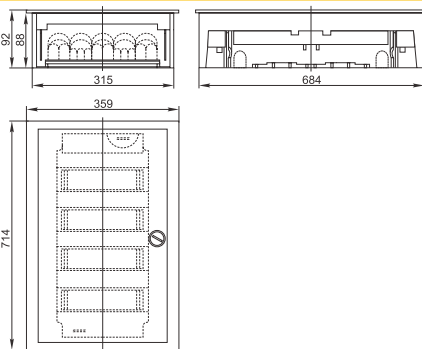


DIN-rails and support with N and PE buses.



Manual, marking sheet.

Range

Overall and installation dimensions		Name	Package amount	Product ID
		<p>KMPv 4/14 flush metal-door plastic empty enclosure. Type: 1 row, 14 modules. N and PE buses. $13 \times 16 \text{ mm}^2$ - 2 pcs Weight: 2,088 kg</p>	1	MKP54-V-14-30-01
		<p>KMPv 4/28 flush metal-door plastic empty enclosure. Type: 2 rows, 28 modules. N and PE buses. $17 \times 16 \text{ mm}^2$ - 2 pcs Weight: 2,838 kg</p>	1	MKP54-V-28-30-01
		<p>KMPv 4/42 flush metal-door plastic empty enclosure. Type: 3 rows, 42 modules. N and PE buses. $27 \times 16 \text{ mm}^2$ - 2 pcs Weight: 3,6 kg</p>	1	MKP54-V-42-30-01
		<p>KMPv 4/56 flush metal-door plastic empty enclosure. Type: 4 rows, 56 modules. N and PE buses. $27 \times 16 \text{ mm}^2$ - 2 pcs Weight: 4,6 kg</p>	1	MKP54-V-56-30-01