



Corp de iluminat pentru hale cu reglarea fluxului luminos

90-265 V AC	50/60 Hz	[h] 50.000	≥ 75	>30.000					T_a -20...+50°C	$\cos \phi$ $>0,95$	IP 65		
-----------------------	----------	---------------	-----------	-----------	--	--	--	--	----------------------	------------------------	--------------	--	--

TRACON		L E D	[lm]	[°]	Tc [K]	
LHBH90W	90 W	250 W	12.150 lm	130/40°	4.000 K	A+
LHBH150W	150 W	400 W	20.250 lm	130/40°	4.000 K	A+

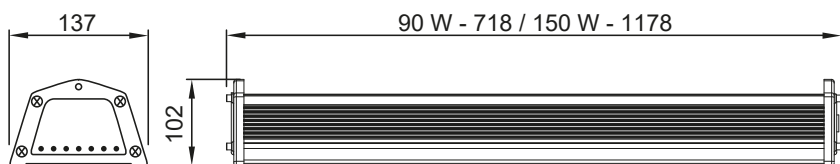


Curba fotometrică LHBH

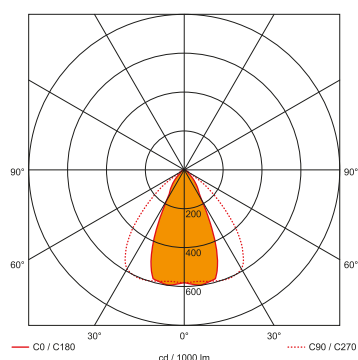

Corp de iluminat industrial cu LED, asociabil

230 V AC	50/60 Hz		[h] 50.000			≥ 80	T_a -20...+50°C		120°		max. 42 m		
--------------------	----------	--	---------------	--	--	-----------	----------------------	--	------	--	-----------	--	--

TRACON		L E D	[lm]	Tc [K]	L E D	L x W x H (mm)	
ML0620NW	20 W	2 x 18 W	2.600 lm	4.000 K	144 x SMD2835	600 x 73 x 55	A+
ML1240NW	40 W	2 x 36 W	5.200 lm	4.000 K	288 x SMD2835	1200 x 73 x 55	A+
ML1560NW	60 W	2 x 58 W	7.800 lm	4.000 K	432 x SMD2835	1500 x 73 x 55	A+
MLC2	-	-	-	-	-	3 x 0.75 mm ² , 2 m	-

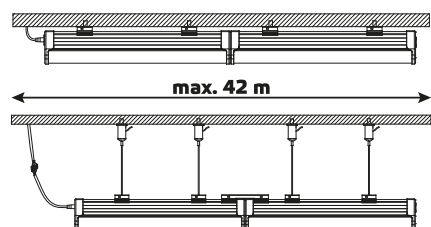

ML0620NW

ML1240NW

MLC2