
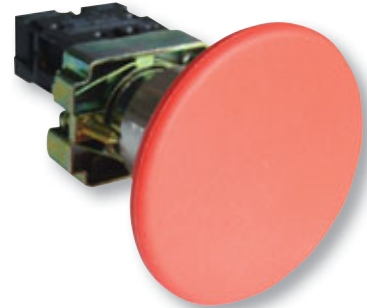

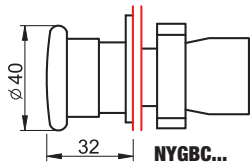


Butoane tip ciupercă

I_e (AC 1, 230 V) 6 A	I_e (AC 15, 230 V) 3 A	I_e (DC 13, 230 V) 0,27 A	U_i 660 V	mm² 0,5-2,5	×10⁶	F_{on} max. 20 N	T_a -25...+70°C	22 mm	Legendă pictograme	K/O
--	---	--	--------------------------------------	---	------------------------	---	--	--------------	---------------------------	------------

TRACON			IP65	NC NO	40 mm
NYGBC21	NYGBC21T	-		NYGD-1GR	1 × NO
NYGBC31Z	NYGBC31ZT	-		page K/32	1 × NO
NYGBC51S	NYGBC51ST	-		1 × NO	40 mm
NYGBC61K	NYGBC61KT	-		1 × NO	
NYGBC42P	NYGBC42PT	NYGBC42PTS		NYGD-1YE	1 × NC
NYGBR42P	NYGBR42PT	NYGBR42PTS	page K/32	1 × NC	60 mm



RELEVANT STANDARD
EN 60947-1

RELEVANT STANDARD
EN 60947-5-1

Butoane de avarie tip ciupercă, cu cheie

I_e (AC 1, 230 V) 6 A	I_e (AC 15, 230 V) 3 A	I_e (DC 13, 230 V) 0,27 A	U_i 660 V	mm² 0,5-2,5	×10⁶	F_{on} max. 20 N	F_{off} max. 15 N	T_a -25...+70°C	Legendă pictograme	K/O
--	---	--	--------------------------------------	---	------------------------	---	--	--	---------------------------	------------

TRACON			IP65	NC NO	30 mm
NYG442P30	NYG442P30T	NYG442P30TS		NYGD-1GR	1 × NC 30 mm
NYG542P40	NYG542P40T	NYG542P40TS		NYGD-1YE	1 × NC 40 mm
NYG642P60	NYG642P60T	NYG642P60TS		page K/32	1 × NC+1 × NO 40 mm
NYGBS8445P	NYGBS8445PT	NYGBS8445PTS		1 × NC 40 mm	
NYGBS142P	NYGBS142PT	NYGBS142PTS		1 × NC+1 × NO 40 mm	
NYGBS9445P	NYGBS9445PT	NYGBS9445PTS		1 × NC+1 × NO 40 mm	

