

GOLIA

MEDIUM SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.


Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		

Q23.131.F1R

MADE IN ITALY



GOLIA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

***DIFFUSORE** in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



Dimensions and weight
Height: 360 mm
Width: 230 mm
Depth: 230 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY: 90% ENERGY SAVING.**

E27 CCT SET(*)



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K

6,5W filament = **60W incandescent**

8,5W CCT

SAVE up to 89%


LED LAMPS



LVD EMC ERP


Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

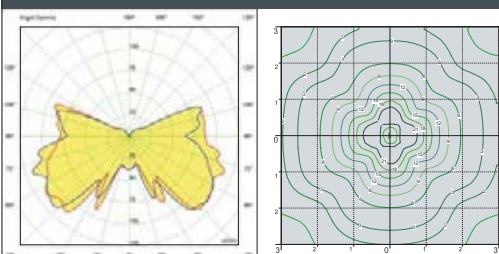

GOLIA lantern clear with Fumagalli Led Lamp CCT set 8,5W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GOLIA

MEDIUM SIZE



Q23.111.V1K




Q23.151.V1K



Q23.120.F1R





BISSO/GOLIA

E27 lampholder	Q23.131.E27
6,5W filament	Q23.131.F1R
8,5W CCT set	Q23.131.V1K

Pcs 12
Kg 19
mc 0,225

PORPORA/GOLIA

E27 lampholder	Q23.141.E27
6,5W filament	Q23.141.F1R
8,5W CCT set	Q23.141.V1K

Pcs 1
Kg 4
mc 0,034

MINILOT/GOLIA

E27 lampholder	Q23.111.E27
6,5W filament	Q23.111.F1R
8,5W CCT set	Q23.111.V1K

Pcs 12
Kg 19
mc 0,225

GOLIA

Q23.000

Pcs 1
Kg 1,3
mc 0,018

SICHEM/GOLIA

E27 lampholder	Q23.120.E27
6,5W filament	Q23.120.F1R
8,5W CCT set	Q23.120.V1K

Pcs 12
Kg 19
mc 0,225

MIZAR/GOLIA resin

E27 lampholder	Q23.151.E27
6,5W filament	Q23.151.F1R
8,5W CCT set	Q23.151.V1K

Pcs 1
Kg 3
mc 0,07

IAFET/GOLIA resin

E27 lampholder	Q23.162.E27
6,5W filament	Q23.162.F1R
8,5W CCT set	Q23.162.V1K

Pcs 2
Kg 7,9
mc 0,086

ALOE'R/GOLIA resin

E27 lampholder	Q23.163.E27
6,5W filament	Q23.163.F1R
8,5W CCT set	Q23.163.V1K

Pcs 2
Kg 8,6
mc 0,121

ARTU'/GOLIA

E27 lampholder	Q23.158.E27
6,5W filament	Q23.158.F1R
8,5W CCT set	Q23.158.V1K

Pcs 1
Kg 9,6
mc 0,148

GIGI/GOLIA

E27 lampholder	Q23.156.E27
6,5W filament	Q23.156.F1R
8,5W CCT set	Q23.156.V1K

Pcs 1
Kg 10,9
mc 0,172

RICU/GOLIA

E27 lampholder	Q23.157.E27
6,5W filament	Q23.157.F1R
8,5W CCT set	Q23.157.V1K

Pcs 1
Kg 11,7
mc 0,18