




Proiectoare LED, seria RSMDL..H (fără cablu)

220-240 V AC    50/60 Hz    25.000 [h]             IP 65    SMD LED    Ta -20..+50°C    110°    ON-OFF >15.000    IK08


TRACON	[W]	LED	[lm]	Tc [K]	L x W x H (mm)	Ei
<b>RSMDL20H</b>	20 W	150 W	1.500 lm	4.000 K	136 x 95 x 55	A
<b>RSMDL50H</b>	50 W	400 W	3.750 lm	4.000 K	203 x 142 x 65	A
<b>RSMDLM10H</b>	10 W	70 W	750 lm	4.000 K	142 x 165 x 63	A
<b>RSMDLM20H</b>	20 W	150 W	1.500 lm	4.000 K	142 x 165 x 63	A
<b>RSMDLM30H</b>	30 W	250 W	2.700 lm	4.000 K	175 x 185 x 64	A
<b>RSMDLM50H</b>	50 W	400 W	3.750 lm	4.000 K	205 x 205 x 64	A

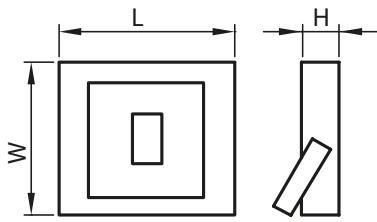

RSMDL..H

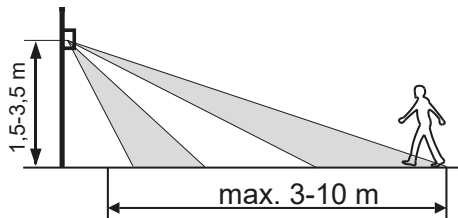

RSMDLM..H

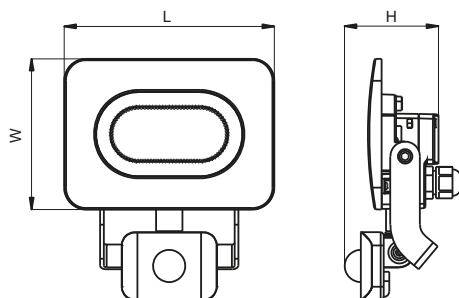

3-2.000 lux    10s-7min    110°