

Conector pentru corpuri de iluminat

TRACON	mm ²				L (mm)	W (mm)	H (mm)
OLC11D	1 × 0.5-2.5	1 × 0.5-2.5	1 × 0.5-2.5	1 × 0.5-2.5	42.6	10.6	16.4
OLC11	1 × 1-2.5	-	1 × 0.5-2.5	1 × 0.5-2.5	20.5	8.1	15.1
OLC21	2 × 1-2.5	-	1 × 0.5-2.5	1 × 0.5-2.5	20.5	9.7	15.6

VO
UL94

E-Cu-sn


PA6.6

400 V


IP
20

In
max.
24 A


Ta
-10..+55 °C




OLC11D



OLC11



OLC21



Cleme de legătură fără șurub

TRACON	mm ²	L (mm)	W (mm)	H (mm)
■ TRC252	2 × 0.5-4	19	10.5	9.5
■ TRC253	3 × 0.5-4	19	13.5	9.5
■ TRC254	4 × 0.5-4	19	17.5	9.5
■ TRC255	5 × 0.5-4	19	21	9.5
■ TRC258	8 × 0.5-4	19	17.5	16.5
 RV02,5-2	2 × 0.5-2.5	16.6	10	6
■ RV02,5-3	3 × 0.5-2.5	16.6	13.9	6
■ RV02,5-4	4 × 0.5-2.5	16.6	18	6
■ RV02,5-5	5 × 0.5-2.5	16.6	22.2	6
■ RV02,5-8	8 × 0.5-2.5	16.6	18.1	11

VO
UL94

E-Cu-sn




PA6.6

500 V

IP
20

In
max.
24 A

Ta
-10..+55 °C

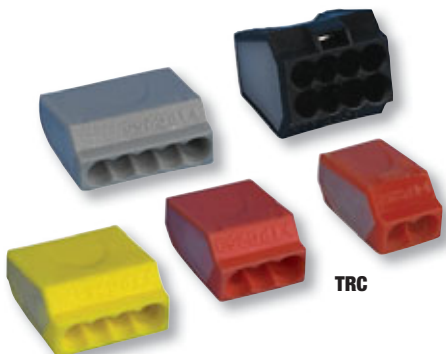

RELEVANT STANDARD
EN 60998-1
EN 60998-2-4