

### Cutii de distribuție din material plastic

600/1000  
V AC/DC

$U_i$   
1 kV

$I_n$   
max.  
100 A



ABS

HB  
UL94

IP  
65



$T_a$   
-25..+50°C

IK10

UV

RAL 7035


#### TRACON

				H (mm)	W (mm)	D (mm)	×17,5mm Σs		NPE
TME282113*	TME282113T*	TME282113M	TME282113MT	280	210	130	1 × 8	1	-
TME332513*	TME332513T*	TME332513M	TME332513MT	330	250	130	2 × 9	1	-
TME403017*	TME403017T*	TME403017M	TME403017MT	400	300	165	2 × 12	2	-
TME403020*	TME403020T*	-	-	400	300	195	-	2	-
TME504018*	TME504018T*	TME504018M	TME504018MT	500	400	175	3 × 17	2	-
TME604020*	TME604020T*	TME604020M	TME604020MT	600	400	200	4 × 17	2	-
TME705025*	TME705025T*	TME705025M	TME705025MT	700	500	245	4 × 22	2	-

#### TME-ZMH



\* cu contrapanou

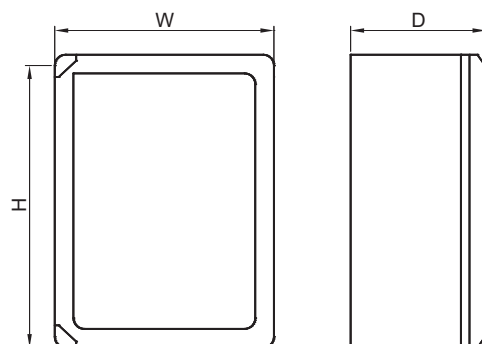

#### TME-ZM



- Încuietoare cu corp din plastic, bucsă și limbă metalică, unghi de rotire 180°. După montare, cutia își păstrează gradul protecție IP 65.
- Execuția cheii: Cheie universală

RELEVANT STANDARD  
EN 62208



TME...  
TME...M



TME...T



TME...MT