

Time saving

- Quick installation as the products are delivered with clamping yoke open
- Identical contours for easier planning

Space saving

- Small „W-Compact“ size saves space in the panel
- Two conductors can be connected for each contact point

Safety

- The clamping yoke properties compensate for temperature-indexed changes to the conductor to prevent loosening
- Vibration-resistant connectors – ideal for applications in harsh conditions
- Protection against incorrect conductor entry
- Copper current bar for low voltages, clamping yoke and screw made of hardened steel
- Precise clamping yoke and current bar design for safe contact with even the smallest of conductors

Overview


You can rely on it: thanks to the range of models and real flexibility, our terminal blocks with clamping yoke technology can be used in a wide range of different applications.

Universal application:

Numerous national and international approvals and qualifications in accordance with a variety of application standards make the W-series a universal connection solution, especially in harsh conditions.


Varied product assortment with wide clamping range:

Our terminal blocks with clamping yoke technology are available in both standard and compact designs. The compact design covers wire cross-sections from 0.05 mm² to 150 mm² and helps save space in the panel. The standard version covers conductor cross sections of up to 240 mm². The identical contours of the terminal blocks make configuration easier and reduces the quantity of accessories required.

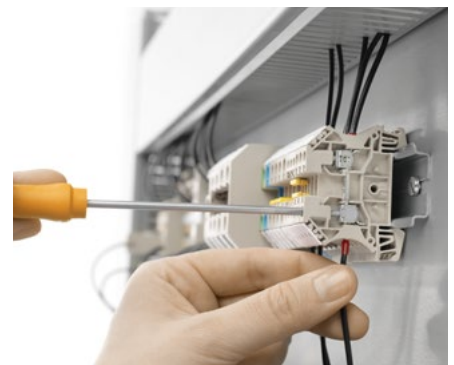

WDU 4

4 mm²



6.1 x 60 x 46.5
41 / 6
0.13...6



IEC 60947-7-1 Ex e II II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	690
32	35	35	32
4	AWG 26...10	AWG 26...10	4 mm ²

8 kV / 3

A4 / V-0

DEMKO14ATEX1338U

Rated connection	Further connection
0.5...6 / 1.5...6	
0.5...6 / 0.5...4	
0.5...1 Nm / (M 3)	
10 / 0.6 x 3.5 mm	

0.5...2.5

0.5...1.5 / 0.5...1.5

Rated voltage is 400 V when using the ZQV cross-connector.
Note max. current of terminal (41 A) when using WQV!

Type	Qty.	Order No.
WDU 4	100	1020100000
WDU 4 BL	100	1020180000


1000 VDC rated voltage tested. Rated voltage is 400 V when using the cross-connector. For alternative colours, see section on W-series accessories

Type	current	Qty.	Order No.
ZQV 4N/2	32 A	60	1527930000
ZQV 4N/10	32 A	20	1528090000
WQV 4/2	32 A	50	1051960000
WQV 4/10	41 A	20	1052060000
WAP 2.5-10		50	1050000000
WAP 2.5-10 BL		50	1050080000
WAP 16+35 WTW 2.5-10		20	1050100000
WAP 16+35 WTW 2.5-10 BL		20	1050180000
WEW 35/2		100	1061200000
WTA 3 WDU4		25	1632350000
WTA 3/ZA WDU4		25	1632360000
WAD 5 MC NE WS		48	1112910000
WAD 5 MC NE GE		48	1112920000
WS 12/6 MC NE WS		600	1609900000
WS 8/6 MM WS		600	2007160000
DEK 5/6 MM WS		600	2007120000

Socket and test plug, see section "W series accessories". Only 400 V with the use of shield bus LS 2.8 1056400000.

WDU 4 HV

4 mm²



6.1 x 60 x 46.5
41 / 6
0.13...6



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
1000			
32			
4			

8 kV / 3

A4 / V-0

DEMKO14ATEX1338U

Rated connection	Further connection
0.5...6 / 1.5...6	
0.5...6 / 0.5...4	
0.5...1 Nm / (M 3)	
10 / 0.6 x 3.5 mm	

0.5...2.5

0.5...1.5 / 0.5...1.5


Type	Qty.	Order No.
WDU 4 HV	100	1412960000

Type	current	Qty.	Order No.
ZQV 4N/2	32 A	60	1527930000
ZQV 4N/10	32 A	20	1528090000
WQV 4/2	32 A	50	1051960000
WQV 4/10	41 A	20	1052060000
WAP 2.5-10		50	1050000000
WAP 2.5-10 BL		50	1050080000
WAP 16+35 WTW 2.5-10		20	1050100000
WAP 16+35 WTW 2.5-10 BL		20	1050180000
WEW 35/2		100	1061200000
WTA 3 WDU4		25	1632350000
WTA 3/ZA WDU4		25	1632360000
WAD 5 MC NE WS		48	1112910000
WAD 5 MC NE GE		48	1112920000
WS 12/6 MC NE WS		600	1609900000
DEK 5/6 MC NE WS		1000	1609820000
WS 8/6 MM WS		600	2007160000
DEK 5/6 MM WS		600	2007120000

Socket and test plug, see section "W series accessories". Only 400 V with the use of shield bus LS 2.8 1056400000.

WDU 4/ZZ

4 mm²



6.1 x 70 x 53
32 / 6
0.05...6



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600	600	690
32	30	30	29.5
4	AWG 30...10	AWG 30...10	4 mm ²

8 kV / 3

A4 / V-0

DEMKO14ATEX1338U

Rated connection	Further connection
0.5...6	
0.5...4 / 0.5...4	
0.5...0.8 Nm / (M 3)	
10 / 0.6 x 3.5 mm	

0.5...1.5 / 0.5...1.5

Type	Qty.	Order No.
WDU 4/ZZ	50	1905060000
WDU 4/ZZ BL	50	1114720000

Type	current	Qty.	Order No.
ZQV 4N/2	32 A	60	1527930000
ZQV 4N/10	32 A	20	1528090000
WAP WDU/WTR4/ZZ		50	1905150000
WEW 35/2		100	1061200000
WS 12/6 MC NE WS		600	1609900000
DEK 5/6 MC NE WS		1000	1609820000
WS 8/6 MM WS		600	2007160000
DEK 5/6 MM WS		600	2007120000

Cross-connections, see section "W series accessories".

