



Wire Mesh Cable Trays H35 - H110

| | |
|---|-------|
| 1. Wire Mesh Cable Tray KDS/KDSO | II-6 |
| 2. Joint Connector USSN/USO | II-14 |
| 3. Side Holder BSM | II-23 |
| 4. Mounting Plate BMS | II-23 |
| 5. Bracket WFLS | II-31 |
| 6. Bracket WFCS | II-31 |
| 7. Snap-in Connector ZLS | II-12 |
| 8. Bracket WWKS | II-28 |
| 9. Snap-in Support PMC/PMCO | II-23 |
| 10. Connection Piece PLC23/01 | II-14 |
| 11. Center Hanger ZSW | II-21 |
| 12. Snap-in Bottom Connector UZS | II-12 |
| 13. Horizontal Tee TKS | II-18 |
| 14. Bend Wire Mesh Cable Trays 90° KKS | II-18 |
| 15. Articulated Snap-in Connector LSG | II-13 |
| 16. Hanger WSKS | II-32 |
| 17. Drop-Out Plate ZKS | II-21 |
| 18. Bracket WZKS | II-28 |
| 19. Ceiling Bracket WSP | II-34 |
| 20. Bracket WFMLS | II-30 |
| 21. Bracket WFMCS | II-30 |
| 22. Cable Clip UKZ1/UKZO1 | II-21 |
| 23. Snap-in Support PMCN | II-23 |

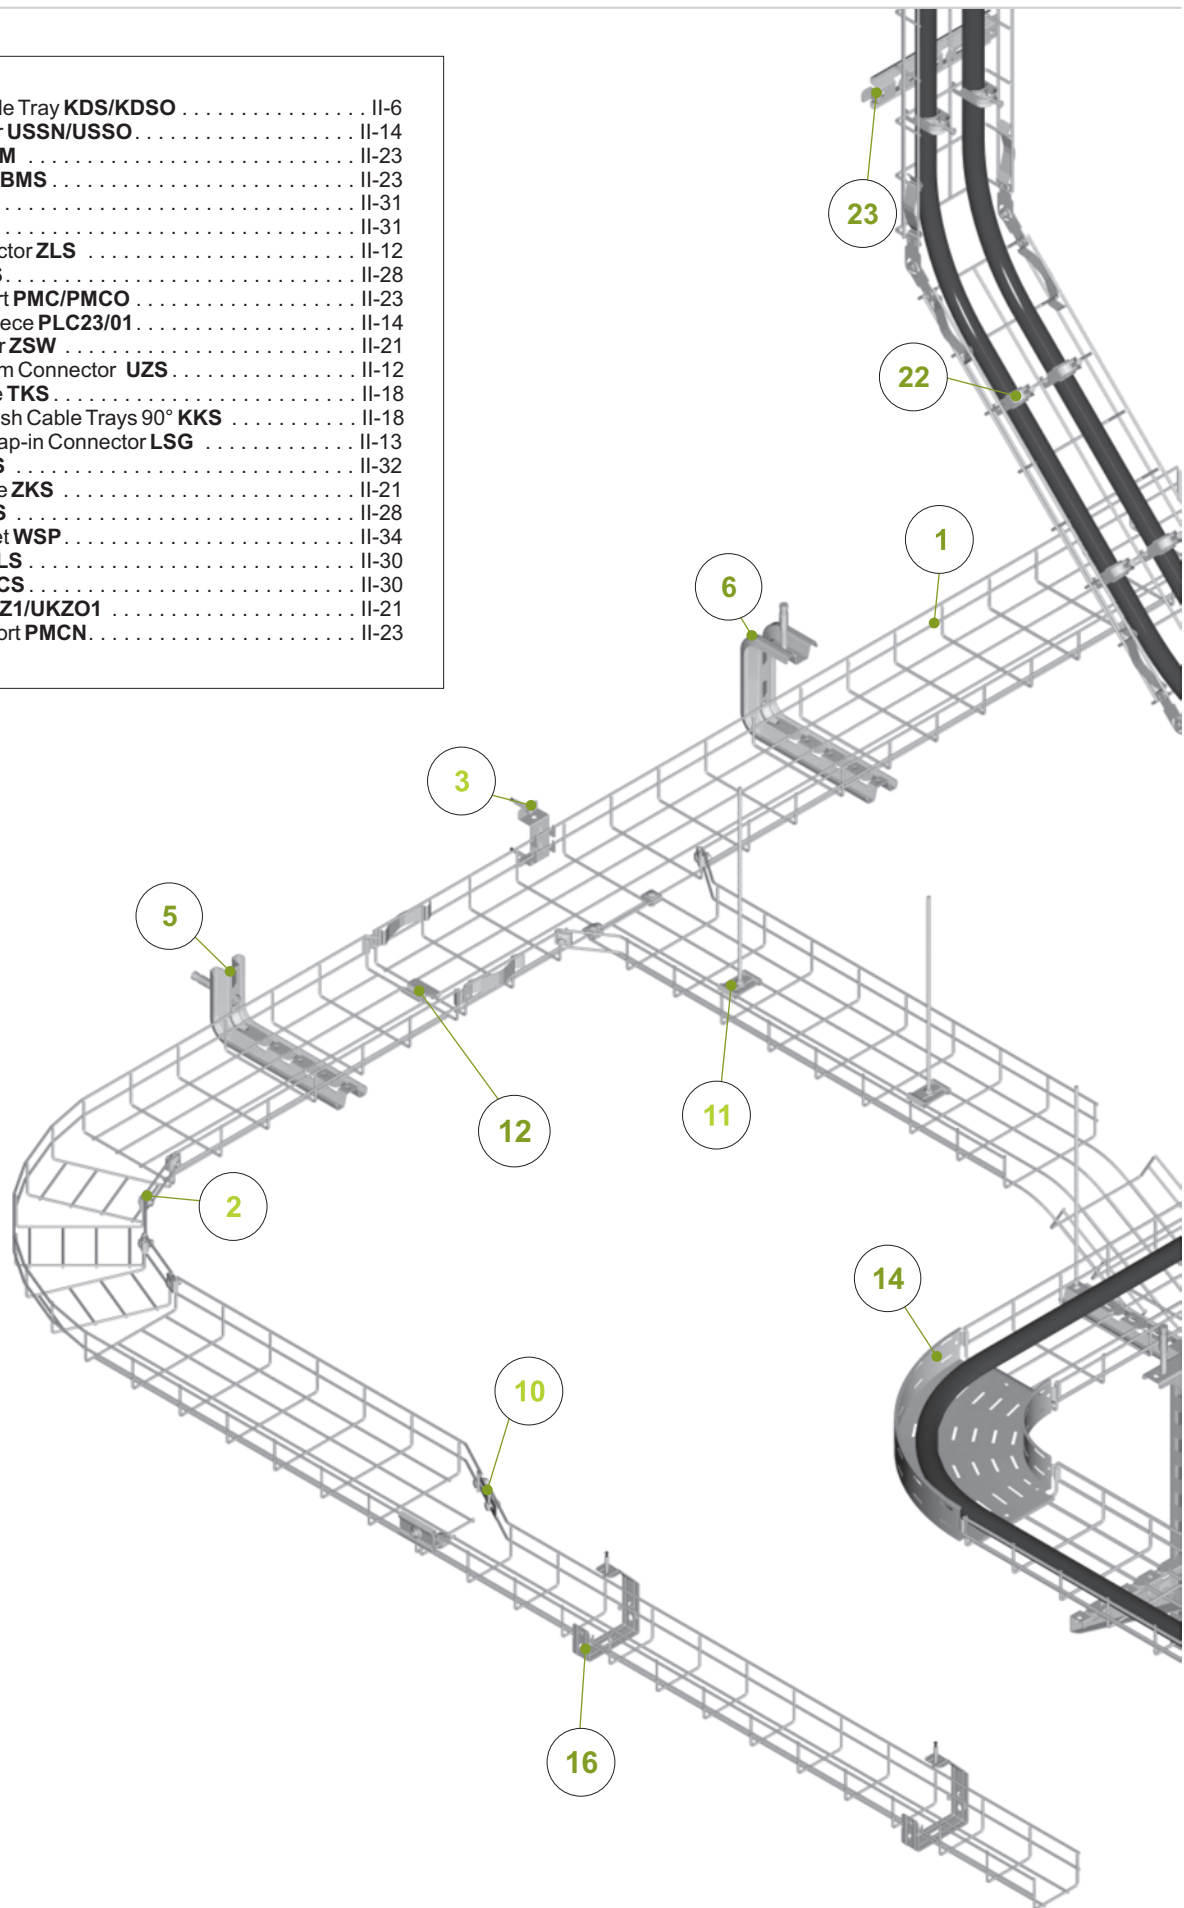

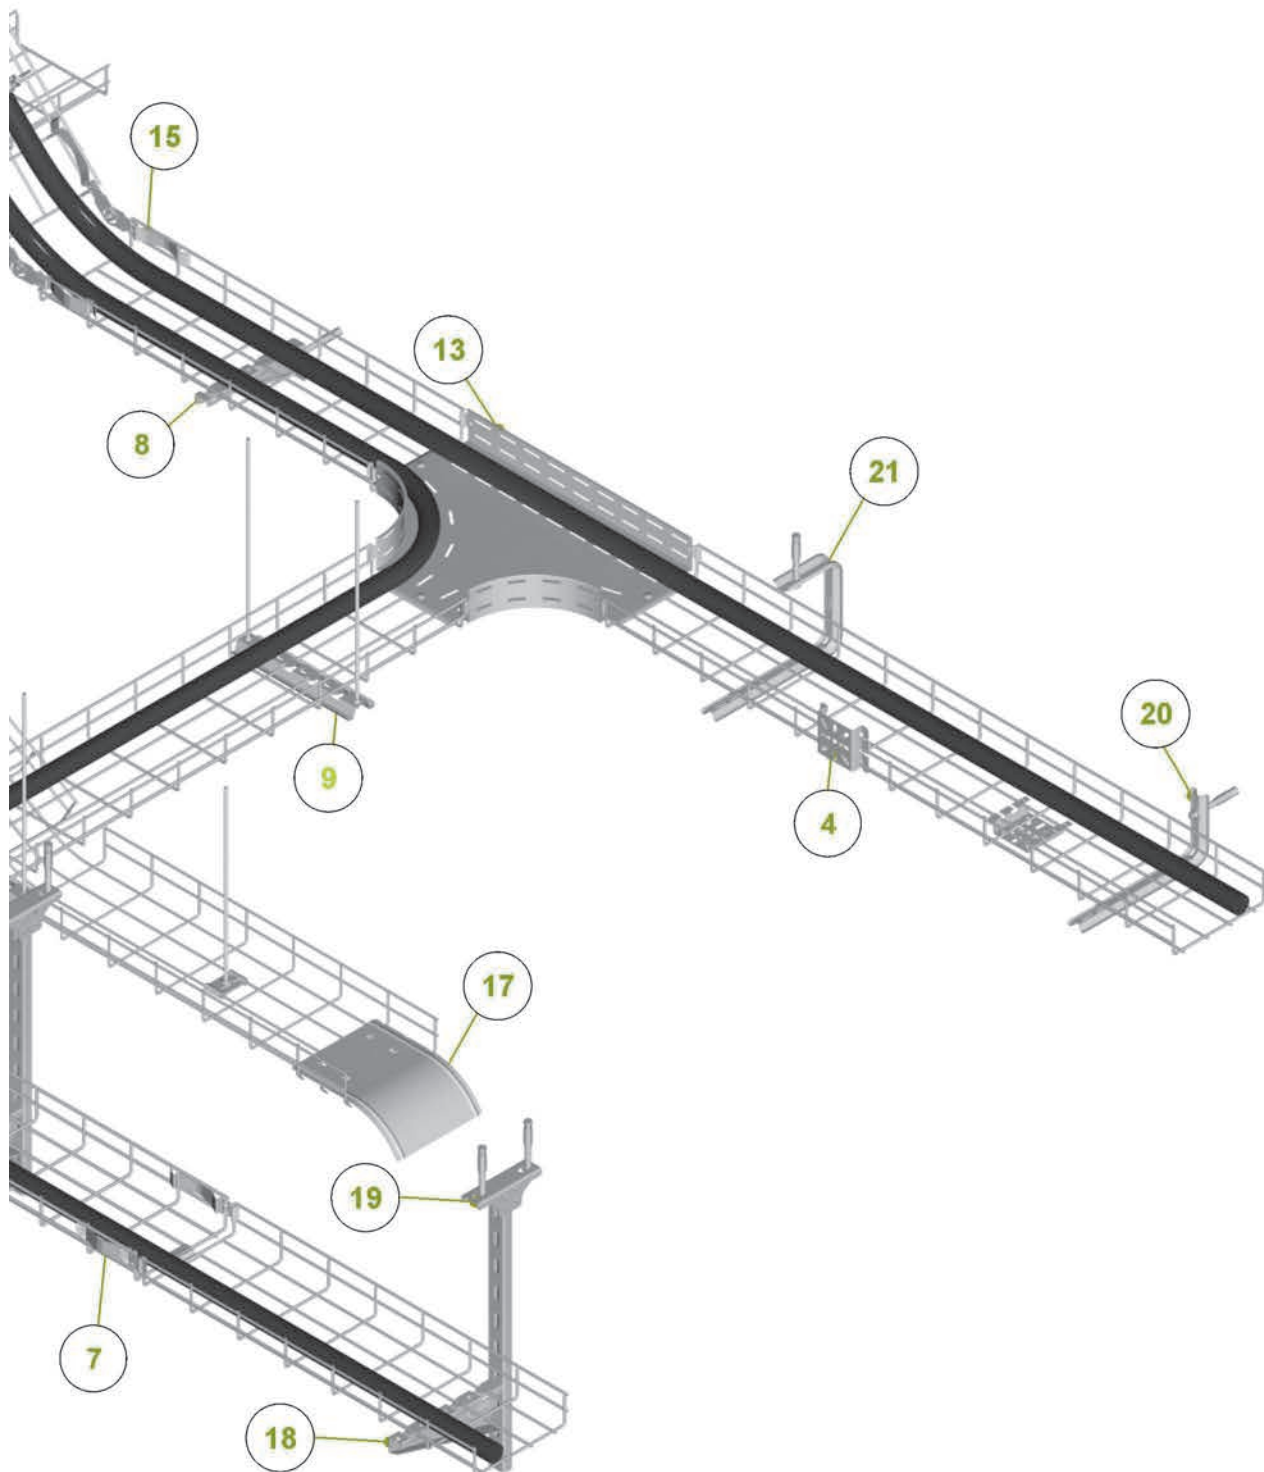


Wire Mesh Cable Trays- Accessories



Note. Hot dip galvanizing (PN-EN ISO 1461:2011 (HDG)) and diffusion galvanizing method (PN-EN ISO 17668:2016) for elements up to 200mm will be replaced with zink flake coating method PN-EN ISO 10683:2014-09

Bracket


WW...



APPLICATION
Suspending wire mesh cable trays

Bracket


WWSS...



APPLICATION
Suspending wire mesh cable trays

Bracket


WWKS...



APPLICATION
Screwless Suspending wire mesh cable trays.


Bracket

WZKS...



Bracket

WZDS...



APPLICATION
Screwless Suspending wire mesh cable trays.

WW...


| CODE | Length L mm | Height H mm | Safe Working Load F _{max} [kN] | kg 1 pc | Catalogue No. | Qty |
|-------|-------------------|-------------------|---|------------|------------------|-----|
| WW50 | 60 | 48 | 0.85 | 0.05 | 710405 | 100 |
| WW100 | 110 | 70 | 0.90 | 0.08 | 710410 | 100 |
| WW150 | 160 | 70 | 1.00 | 0.12 | 710415 | 100 |
| WW200 | 210 | 75 | 1.05 | 0.22 | 710420 | 100 |
| WW300 | 315 | 95 | 1.25 | 0.40 | 710430 | 50 |
| WW400 | 415 | 95 | 1.15 | 0.57 | 710440 | 30 |
| WW500 | 515 | 95 | 1.05 | 0.80 | 710450 | 30 |
| WW600 | 615 | 95 | 0.95 | 0.91 | 710460 | 30 |



WWSS...


| CODE | Length L mm | Height H mm | Safe Working Load F _{max} [kN] | kg 1 pc | Catalogue No. | Qty |
|---------|-------------------|-------------------|---|------------|------------------|-----|
| WWSS100 | 115 | 80 | 1.20 | 0.19 | 900710 | 30 |
| WWSS200 | 215 | 90 | 1.40 | 0.38 | 900720 | 30 |
| WWSS300 | 315 | 115 | 1.90 | 0.77 | 900730 | 30 |
| WWSS400 | 415 | 115 | 1.80 | 1.20 | 900740 | 20 |
| WWSS500 | 515 | 115 | 1.60 | 1.22 | 900750 | 20 |
| WWSS600 | 615 | 115 | 1.50 | 1.33 | 900760 | 20 |

Important!
Bracket WWSS may be used in combination with Clamping Piece ZS/ZSO



WWKS...


| CODE | Length L mm | Height H mm | Safe Working Load F _{max} [kN] | kg 1 pc | Catalogue No. | Qty |
|---------|-------------------|-------------------|---|------------|------------------|-----|
| WWKS100 | 110 | 70 | 0.90 | 0.08 | 902310 | 100 |
| WWKS150 | 160 | 70 | 1.00 | 0.12 | 902315 | 100 |
| WWKS200 | 210 | 75 | 1.05 | 0.22 | 902320 | 100 |
| WWKS300 | 315 | 95 | 1.25 | 0.40 | 902330 | 50 |
| WWKS400 | 415 | 95 | 1.15 | 0.57 | 902340 | 30 |
| WWKS500 | 515 | 95 | 1.05 | 0.80 | 902350 | 30 |
| WWKS600 | 615 | 95 | 0.95 | 0.91 | 902360 | 30 |



WZKS...

| CODE | Length L mm | Safe Working Load F _{max} [kN] | kg 1 pc | Catalogue No. | Qty |
|---------|-------------------|---|------------|------------------|-----|
| WZKS100 | 115 | 1.30 | 0.16 | 902410 | 50 |
| WZKS150 | 165 | 1.20 | 0.21 | 902415 | 50 |
| WZKS200 | 215 | 1.00 | 0.29 | 902420 | 30 |
| WZKS300 | 315 | 0.85 | 0.63 | 902430 | 30 |
| WZKS400 | 415 | 0.80 | 0.78 | 902440 | 30 |
| WZKS500 | 515 | 0.75 | 0.87 | 902450 | 20 |
| WZKS600 | 615 | 0.70 | 1.02 | 902460 | 20 |


IMPORTANT!
Screwless assembly to the :
- construction made on support channels BAKS with 13x30 perforation and max thickness of material 3mm
- ceiling brackets WPCW/WPCO/WPCT... N and WSP
- Brackets WPT and WPL (assembled in vertical position)






WZDS...

| CODE | Length L mm | Safe Working Load F _{max} [kN] | kg 1 pc | Catalogue No. | Qty |
|---------|-------------------|---|------------|------------------|-----|
| WZDS60 | 130 | 0.60 | 0.22 | 905006 | 50 |
| WZDS100 | 170 | 0.50 | 0.30 | 905010 | 50 |
| WZDS150 | 220 | 0.30 | 0.39 | 905015 | 30 |
| WZDS200 | 270 | 0.20 | 0.49 | 905020 | 30 |

NOTE
Possibility of mounting bracket directly to steel construction.

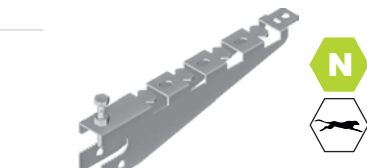

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv.
to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

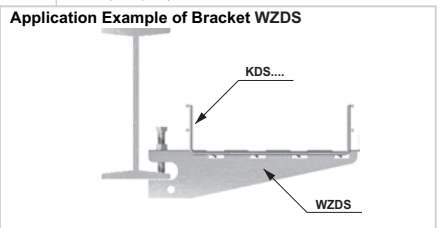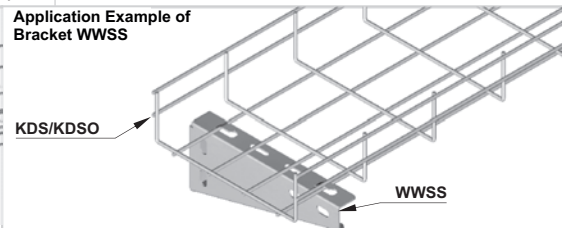

Important! All types of screw sets and anchors you can find in chapter XI