

## Info generali


### Tecnico - Sistemi

Indoor suspended, recessed or ceiling mounted linear fitting with integrated LED sources and direct light emission

<b>Ean</b>	8021696192444
<b>Articolo</b>	FLUO ACCENT 1800 4000K WH
<b>Installazione</b>	Sistemi
<b>Garanzia</b>	5 years
<b>Peso lordo</b>	6.63 kg
<b>Volume</b>	0.025675 m <sup>3</sup>

## Info tecniche e installative

<b>Peso netto</b>	3.86 kg
<b>Classe di isolamento</b>	I
<b>Grado di protezione</b>	IP20
<b>Conformità</b>	CE
<b>Temperatura d'esercizio</b>	0° ~ +40 °C
<b>Efficienza a pieno carico</b>	X
<b>Dimmer</b>	NO, On-Off
<b>Alimentazione</b>	220-240 V AC 50/60 Hz
<b>Alimentatore</b>	In-built, included Replaceable (by qualified operators only), electronic, tridonic
<b>Accessori non inclusi</b>	Mounting kit (suspension, recessed, surface), Dimmable driver, Blinded corner, Structure connector

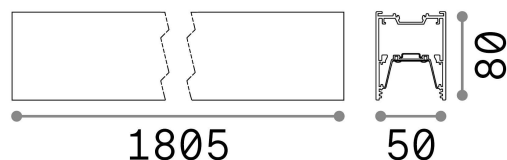

## Info sorgente e prestazionali

<b>Sorgente integrata</b>	Integrated LED module
<b>Sorgente sostituibile</b>	Replaceable (by qualified operators only)
<b>Potenza</b>	30 W
<b>Emissione</b>	Direct
<b>Consumo massimo</b>	max 30,00 W
<b>Caratteristiche LED</b>	LED SMD OSRAM
<b>CCT LED</b>	4000 K
<b>Durata LED (t. 25°c)</b>	50000 h
<b>CRI</b>	> 80
<b>SDCM</b>	3
<b>Fascio luminoso</b>	30°
<b>UGR massimo</b>	< 13
<b>Flusso sorgente</b>	2900 lm
<b>Flusso utile</b>	2350 lm