

Info generali


Tecnico - Sistemi

Indoor suspended, recessed or ceiling mounted linear fitting with integrated LED sources and direct light emission

Ean	8021696192628
Articolo	FLUO WIDE 1800 4000K BK
Installazione	Sistemi
Garanzia	5 years
Peso lordo	6.64 kg
Volume	0.025675 m ³

Info tecniche e installative

Peso netto	4.42 kg
Classe di isolamento	I
Grado di protezione	IP20
Conformità	CE
Temperatura d'esercizio	0° ~ +40 °C
Efficienza a pieno carico	X
Dimmer	NO, On-Off
Alimentazione	220-240 V AC 50/60 Hz
Alimentatore	In-built, included Replaceable (by qualified operators only), electronic, tridonic
Accessori non inclusi	Mounting kit (suspension, recessed, surface), Dimmable driver, Luminous corner, Structure connector

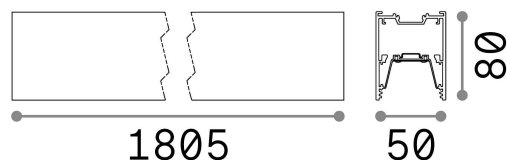

Info sorgente e prestazionali

Sorgente integrata	Integrated LED module
Sorgente sostituibile	Replaceable (by qualified operators only)
Potenza	36 W
Emissione	Direct
Consumo massimo	max 36,00 W
Caratteristiche LED	LED SMD SAMSUNG
CCT LED	4000 K
Durata LED (t. 25°c)	50000 h
CRI	> 80
SDCM	3
Fascio luminoso	105°
Flusso sorgente	5300 lm
Flusso utile	4000 lm