


General info

Technical - Recessed lights

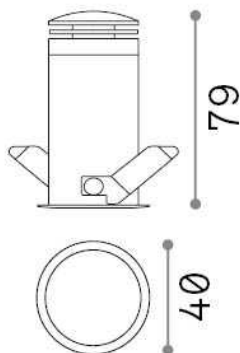

Ean	8021696327495
Item	QUARK FI 5.0W 3000K BK
Installation	Recessed lights
Guarantee	5 years
Gross weight	0.15 kg
Volume	0.000396 m ³

Technical info

Net weight	0.14 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	Separate, included Replaceable (by qualified operators only), electronic
Recessed specifications	Ø 35 - h. ≥ 80 , 5-25

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	5 W
Emission	Direct
Max consumption	max 5,00 W
Features LED	LED SMD BRIDGELUX
CCT LED	3000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
SDCM	3
Light beam	30°
UGR Maximum	< 19
Light beam flux	320 lm
Useful light flux	190 lm
Photobiological risk	2