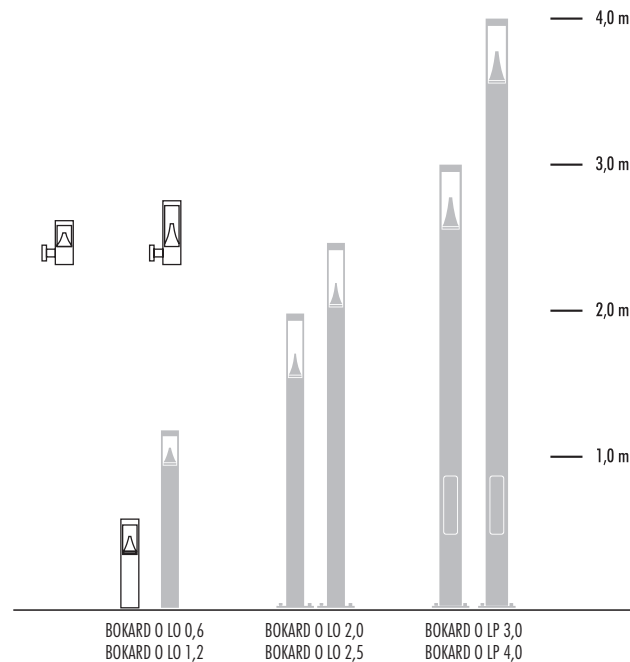
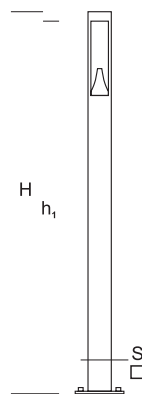



BOKARD

by ELMARCO

OPTYKA
OPTICS

S

METAL KOLOR
METAL COLORbiały 9003
white 9003szary 7043
grey 7043grafitowy 7016
graphite 7016czarny 9005
black 9005na zamówienie
on request

RAL

index		wymary/dimensions [cm]		źródło światła/source of light			oprawa/fixture			fundament foundation
		H/h ₁	w/S	W	lm	lm/W	W	lm	lm/W	
173-0024-000033	BOKARD O K M	30/—	22/12x12	6,5	1200	180	8	960	120	—
173-0024-000034	BOKARD O K D	40/—	22/12x12	6,5	1200	180	8	960	120	—
172-0024-000077	BOKARD O LO 0,6	60/55	—/12x12	6,5	1200	180	8	960	120	FB0 35/7,5
172-0024-000075	BOKARD O LO 1,2	120/115	—/12x12	6,5	1200	180	8	960	120	FB0 50/7,5
172-0024-000122	BOKARD O LO 2,0	200/195	—/15x15	16,5	2800	170	18,5	2100	115	FBK 90/18
172-0024-000124	BOKARD O LO 2,5	249/244	—/15x15	16,5	2800	170	18,5	2100	115	FBK 90/18
190-1111-300007	BOKARD O LP 3,0	300/295	—/15x15	36	5760	160	40	4400	110	FBK 90/18
190-1111-400014	BOKARD O LP 4,0	400/395	—/15x15	36	5760	160	40	4400	110	FBK 90/18

H — wysokość całkowita / total height h₁ — wysokość źródła światła / light source height w — wysięg / arm boom

S — przekrój I stopnia u podstawy / 1st stage cross section in the base

Przybliżone dane w tabelach na 2022 rok. Dokładne dane dostępne w specyfikacjach. / Approximated data for 2022 in tables. Exact data available in specifications.

BOKARD O

Nowoczesna latarnia LED, której kolumnę stanowi kwadratowy profil z aluminium, mocowany do fundamentu. Górną część stanowi komora optyczna z oryginalnym odbłyśnikiem.

Klosz z PC lub PMMA – przezroczysty.

W dolnej części LP we wnęce mieści się tabliczka bezpiecznikowa i zasilacz. Możliwość zamontowania gniazd wtyk 230V IP54.


Przeznaczenie: oświetlenie przestrzeni publicznych w otoczeniu nowoczesnej architektury, parki, skwery.

Modern LED lantern with its column made of a square aluminium profile fixed to the foundation. The upper part forms an optical chamber with original reflector.

Lamp-shade made of PC or PMMA (transparent).

The lower part LP (in the bay) contains a fuse plate and power supply unit. Optionally, IP 54 230-V plug sockets can be mounted.

Designed for: illumination of public areas surrounded by modern architecture, parks, squares.



STANDARD

IP 65	CLASS I/II	CE	RECYCLE	ENERGY D	IK 07	4000°K	CRI ≥70 ≥80
złącze IP 55 connection box IP 55	do wyboru optional				szkło IK 07 glass IK 07		do wyboru optional

NA ZAMÓWIENIE / ON REQUEST

DIM	2700°K – 5000°K	200 mA – 1050 mA
------------	------------------------	-------------------------



Łódź, Pałac Steinerów