

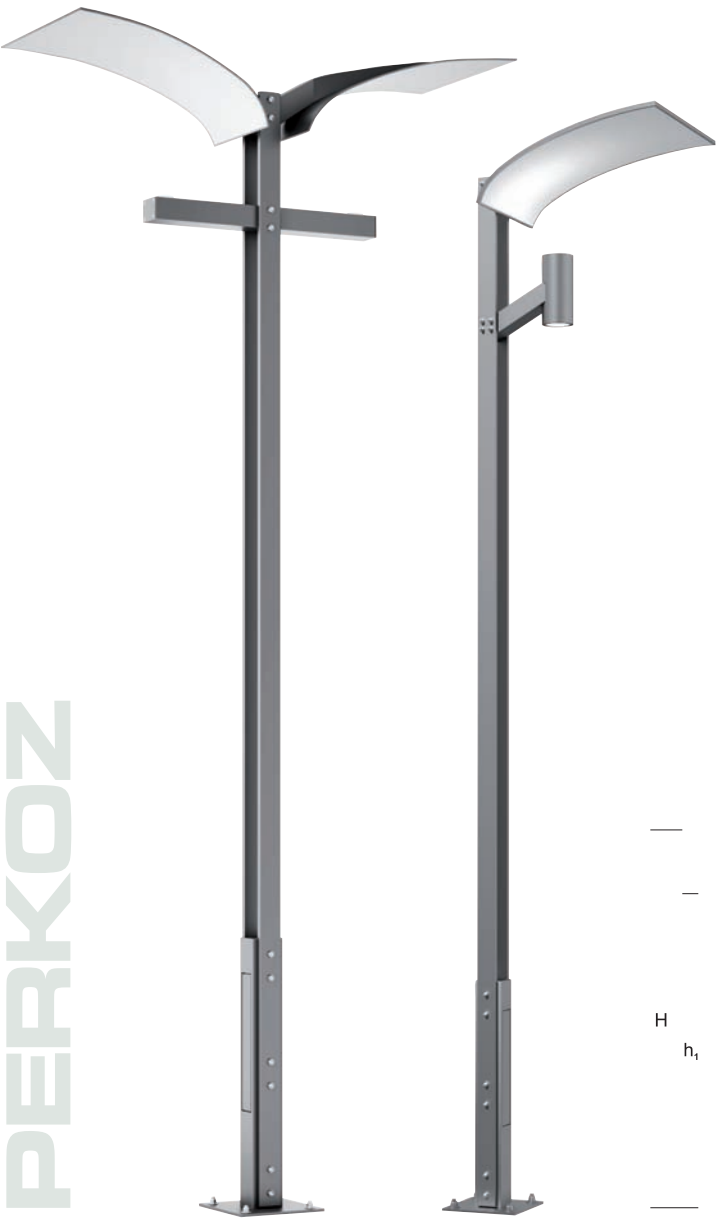


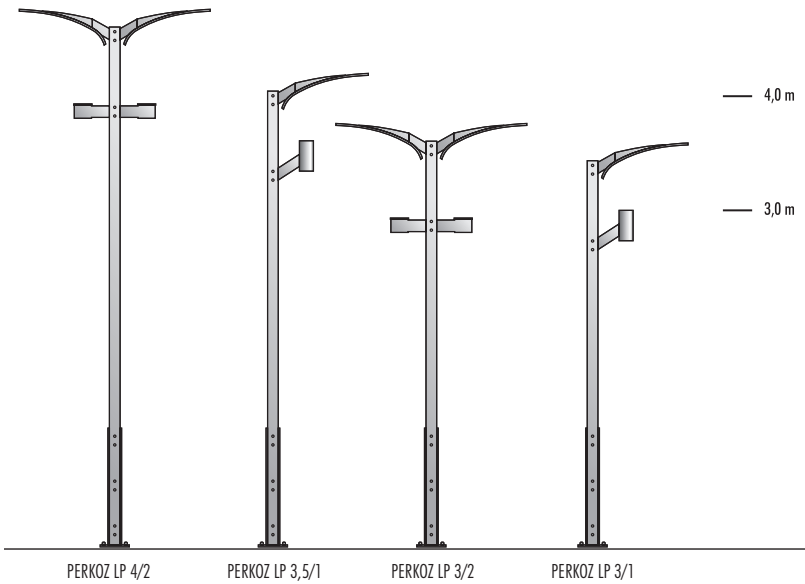

PERKOZ

by ELMARCO

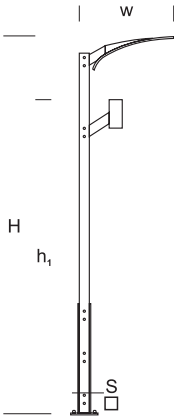

OPTYKA
OPTICS

S

METAL KOLOR
METAL COLOR



biały 9003
white 9003



szary 7043
grey 7043



grafitowy 7016
graphite 7016



czarny 9005
black 9005



na zamówienie
on request

index		wymiany/dimensions [cm]		źródło światła/source of light			oprawa/fixture			fundament foundation
		H/h ₁	w/S	W	lm	lm/W	W	lm	lm/W	
190-1111-310008	PERKOZ LP 3/1	350/300	100/10x10	36	5760	160	40	2420	60	FBK 90/18
190-1111-351004	PERKOZ LP 3,5/1	400/350	100/10x10	36	5760	160	40	2420	60	FBK 90/18
190-1111-352004	PERKOZ LP 3,5/2	400/350	100/10x10	36	5760	160	40	2420	60	FBK 90/18
190-1111-410027	PERKOZ LP 4/1	450/400	100/10x10	36	5760	160	40	2420	60	FBK 90/18
190-1111-420021	PERKOZ LP 4/2	450/400	100/10x10	36	5760	160	40	2420	60	FBK 120/22

H – wysokość całkowita / total height h₁ – wysokość źródła światła / light source height w – wysięg / arm boom
S – przekrój I stopnia u podstawy / 1st stage cross section in the base

Przybliżone dane w tabelach na 2022 rok. Dokładne dane dostępne w specyfikacjach. / Approximated data for 2022 in tables. Exact data available in specifications.

PERKOZ

Nowoczesna latarnia oświetlająca przestrzeń na zasadzie światła odbitego, zbudowana z aluminiowej konstrukcji. Wyposażona w projektory LED. Ekran z blachy aluminiowej malowany biało, odbłyśkową farbą.

Proponowana oprawa: Tubus o mocy 40 W LED + LED E27



Przeznaczenie: oświetlenie przestrzeni publicznych, promenad o nowoczesnej architekturze.

Modern lantern illuminating space on the basis of reflected light, made of aluminum construction.

Equipped LED projectors. Screen made of aluminum sheet painted in reflecting white paint.

Suggested fixture: Tubus 40 W LED + E27 LED

Designed for: illumination of public areas, promenades with modern architecture.



STANDARD

IP 65	CLASS I/II	CE	RECYCLE	ENERGY D	IK 08	4000°K	CRI ≥70 ≥80
złącze IP 55 connection box IP 55	do wyboru optional				szkło IK 07 glass IK 07		do wyboru optional

NA ZAMÓWIENIE / ON REQUEST

2700°K — 5000°K	300 mA — 1050 mA	10kV
-------------------------------------	--------------------------------------	-------------



Marki k. W-wy, osiedle mieszkaniowe