
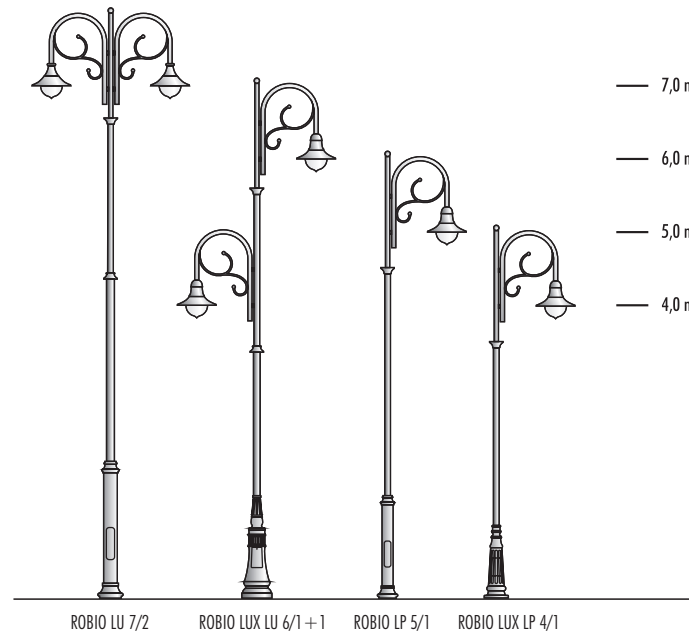


METAL KOLOR
METAL COLORszary 7043
grey 7043grafitowy 7016
graphite 7016czarny 9005
black 9005na zamówienie
on request

wysięgnik jednoramienny lux / single boom lux

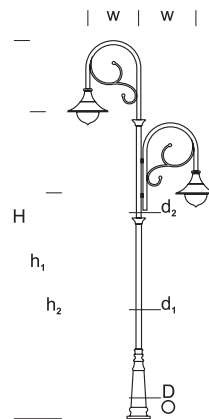

wysięgnik dwuramienny / double boom

index		wymiary/dimensions [cm]		fundament foundation
		H/h/hz/w	D/d/dz/d3	
190-1111-410009	ROBIO LP 4/1	500/400/-/75	13,3/7,6/-/6	FBO 80/14,5
190-1111-510009	ROBIO LP 5/1	600/500/-/75	13,3/7,6/-/6	FBO 80/14,5
190-1111-610005	ROBIO LU 6/1	700/600/-/75	13,3/9/7,6/6	FBO 120/14,5
190-1111-611004	ROBIO LU 6/1 + 1	700/600/400/75	13,3/9/7,6/6	FBO 120/14,5
190-1111-620004	ROBIO LU 6/2	700/600/-/75	13,3/9/7,6/6	FBO 120/14,5
190-1111-710006	ROBIO LU 7/1	800/700/-/75	13,3/9/7,6/6	FBO 120/14,5
190-1111-711004	ROBIO LU 7/1 + 1	800/700/500/75	13,3/9/7,6/6	FBO 120/14,5
190-1111-720006	ROBIO LU 7/2	800/700/-/75	13,3/9/7,6/6	FBO 120/14,5

H — wysokość całkowita / total height h₁/h₂ — wysokość źródła światła / light source height
 w — wysięg / arm boom D — średnica stopnia u podstawy / stage diameter in the base
 d₁/d₂ — średnica II/III stopnia / 2nd/3rd stage diameter
 d₃ — średnica wierzchołka / top diameter

Przybliżone dane w tabelach na 2022 rok. Dokładne dane dostępne w specyfikacjach.
 Approximated data for 2022 in tables. Exact data available in specifications.

ROBIO

by ELMARCO

ROBIO

Klasyczna latarnia zbudowana z aluminiowej kolumny rurowej, dekorowana z charakterystycznym wysięgnikiem 1 lub 2 ramiennym.

Proponowana oprawa: Chantal, Bell o mocy 50–72 W LED

Przeznaczenie: oświetlenie parkowe, uliczne promenady, obszary zabytkowe.

Classic lantern made of an aluminum, piped, decorated column with a characteristic, 1- or 2-arm boom.

Suggested fixture: Chantal, Bell 50–72 W LED

Designed for: illumination of parks, streets, promenades, historic areas.

Proponowana oprawa
Suggested fixture

CHANTAL

BELL



STANDARD

IP 65	CLASS I/II	CE	RECYCLE	ENERGY D	IK 08	4000°K 700 mA	CRI ≥70 ≥80
złącze IP 55 connection box IP 55	do wyboru optional				szkło IK 07 glass IK 07		do wyboru optional

NA ZAMÓWIENIE / ON REQUEST

DIM	2700°K – 5000°K	300 mA – 1050 mA	10 kV
-----	-----------------------	------------------------	-------

