

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

ESTER

SQUARE BOLLARD



Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with stepped shape reflector and with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, Protection rating IP55.

*Collezione di lampade architettoniche a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard quadro in diverse altezze, con picchetto o a parete. Provvista di riflettore a scaletta piramidale e fornita con **incluse lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.***




DS1.564.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ESTER COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrilate (PMMA).

DIFFUSORE trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV.

REFLECTOR with stepped shape spreading the lighting output to emphasize the shape of the product. Made of shockproof resin material.

RIFLETTORE a scaletta piramidale che consente al fascio di luce di enfatizzare la sagoma del prodotto. Realizzato in resina antiurto.

INSTALLATION ELEMENTS:

- POLES for bollard versions
- BASE for wall and surface installation
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- STELI per versione bollard
- BASE per installazione a parete e al suolo
- PICCHETTO per istallazione nel terreno

ESTER



Dimensions

Height: 165/500/800 mm
Width: 126 mm
Depth: 126 mm

Moulded colours:

Black White

Grey

Diffuser PMMA:

Clear

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

GX53 LED

100 - 240 V




LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** easy to upgrade.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.


Bollard supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available.

CCT SETTABLE LED LAMP

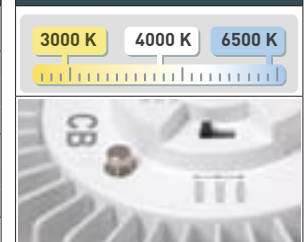

CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

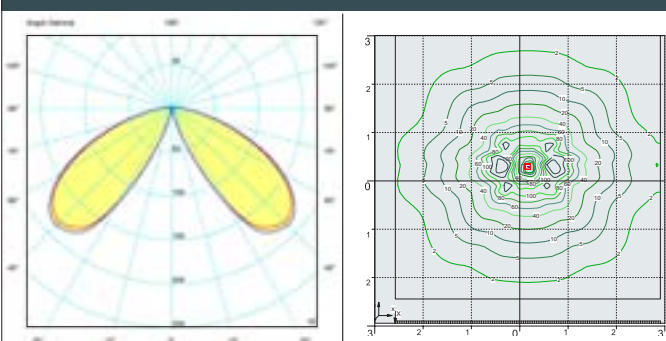

ESTER 800 clear GX53 10W.

Bollard height 0,8 mt
Area: 6x6 mt - average 15 lux

The photometric data for all the versions are available upon request or on our website.

3W 410 Lm = 40W incandescent
SAVE 93%


10W 1290 Lm = 100W incandescent
SAVE 90%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ESTER

SQUARE BOLLARD





ESTER 800	
3W	DS1.564.G1K
10W	DS1.564.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 6 Kg 16 mc 0,145	

ESTER 500	
3W	DS1.563.G1K
10W	DS1.563.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 12 Kg 24 mc 0,145	

ESTER WALL	
3W	DS1.560.G1K
10W	DS1.560.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 18 Kg 22 mc 0,092	

ESTER SPIKE	
3W	DS1.561.G1K
10W	DS1.561.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 18 Kg 23 mc 0,092	