

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

RUT

MEDIUM SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



E26.111.T1K

6,5W	8,5W	11W
800 lm	920 lm	1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°C	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		

MADE IN ITALY



RUT - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

***DIFFUSORE** in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

RUT

E26.000 *



Dimensions and weight

Height: 410 mm
Width: 260 mm
Depth: 227 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



E27 CCT SET(*)



100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K

- perfect **MATCHING WITH DECORATIVE LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

6,5W filament = 60W incandescent
8,5W CCT = 60W incandescent
11W CCT = 75W incandescent

SAVE up to 89%

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

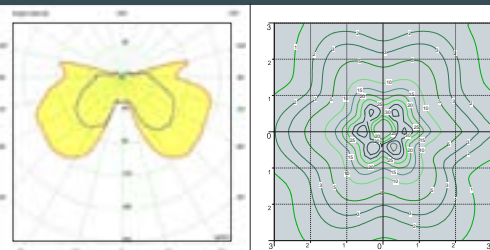

RUT lantern clear with Fumagalli Led Lamp CCT set 8,5W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

RUT

MEDIUM SIZE





BISSO/RUT

E27 lampholder	E26.131.E27
6,5W filament	E26.131.F1R
8,5W CCT set	E26.131.V1K
11W CCT set	E26.131.T1K

Pcs 12
Kg 19
mc 0,225

SICHEM/RUT

E27 lampholder	E26.120.E27
6,5W filament	E26.120.F1R
8,5W CCT set	E26.120.V1K
11W CCT set	E26.120.T1K

Pcs 12
Kg 19
mc 0,225

RUT

E26.000

Pcs 1
Kg 1,3
mc 0,018

MINILOT/RUT

E27 lampholder	E26.111.E27
6,5W filament	E26.111.F1R
8,5W CCT set	E26.111.V1K
11W CCT set	E26.111.T1K

Pcs 12
Kg 19
mc 0,225

PORPORA/RUT

E27 lampholder	E26.141.E27
6,5W filament	E26.141.F1R
8,5W CCT set	E26.141.V1K
11W CCT set	E26.141.T1K

Pcs 1
Kg 4
mc 0,034

IAFET/RUT resin

E27 lampholder	E26.162.E27
6,5W filament	E26.162.F1R
8,5W CCT set	E26.162.V1K
11W CCT set	E26.162.T1K

Pcs 2
Kg 79
mc 0,086

MIZAR/RUT resin

E27 lampholder	E26.151.E27
6,5W filament	E26.151.F1R
8,5W CCT set	E26.151.V1K
11W CCT set	E26.151.T1K

Pcs 1
Kg 3
mc 0,07

ALOE'.R/RUT resin

E27 lampholder	E26.163.E27
6,5W filament	E26.163.F1R
8,5W CCT set	E26.163.V1K
11W CCT set	E26.163.T1K

Pcs 2
Kg 8,6
mc 0,121

ARTU'/RUT

E27 lampholder	E26.158.E27
6,5W filament	E26.158.F1R
8,5W CCT set	E26.158.V1K
11W CCT set	E26.158.T1K

Pcs 1
Kg 9,6
mc 0,148