

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

ECOBEPPE 500 GX53 LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin regolabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.




EP6.000.D9K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ECOBEPPE 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

ECOBEPPE 500 GX53 LED

EP6.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 8,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey
Diffuser PC (UV treated):
 Clear

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and 9x Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	9x 10W 90W	11610 Lm	6500 K 4000 K 3000 K	.D9K

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

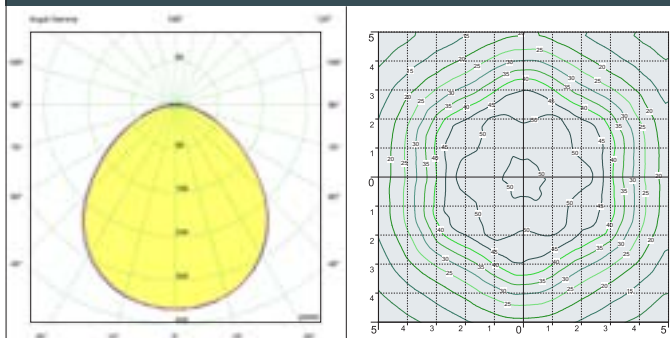

ECOBEPPE 500 GX53 LED 9X10W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

ECOBEPPE 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 – Intallation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.



EP6.000.E27





ECOBEPPE 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.
TETTO completo di pinnacolo decorativo realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

ECOBEPPE 500 E27

EP6.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 6,5Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:


Black White Grey

Diffuser PC (UV treated):

Clear

E27-E40


*ADD SUFFIX

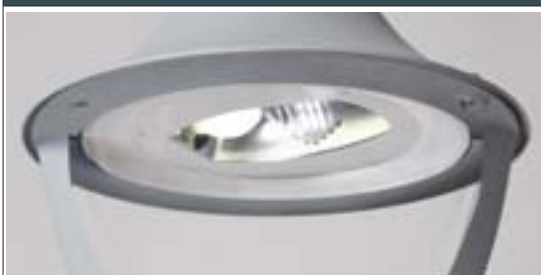

Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

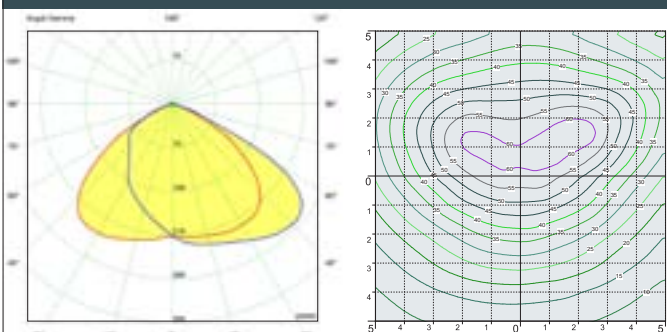

BEPPE 500 E27
HQI 150W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

ECOBEPPE 500

GRAND SIZE




EP6.384.D9K



EP6.421.D9K





EKTOR 6000/ECOBEPPE500
EP6.384.000

600

Pcs 1
Kg 83,1
mc 1,41

6735

400

EKTOR 5000/ECOBEPPE500 EP6.377.000	AKILLE 5000/ECOBEPPE500 EP6.427.000
Pcs 1 Kg 53,6 mc 0,48	
EKTOR 4500/ECOBEPPE500 EP6.374.000	EKTOR 4500/ECOBEPPE500 EP6.424.000
Pcs 1 Kg 48,1 mc 0,46	

600

600

5735
5235

EKTOR5000

AKILLE4500

Ø 265

EKTOR 4000/ECOBEPPE500 EP6.371.000	AKILLE 4000/ECOBEPPE500 EP6.421.000
Pcs 1 Kg 42,6 mc 0,43	
EKTOR 3500/ECOBEPPE500 EP6.367.000	AKILLE 3500/ECOBEPPE500 EP6.417.000
Pcs 1 Kg 39,2 mc 0,40	
EKTOR 3000/ECOBEPPE500 EP6.364.000	AKILLE 3000/ECOBEPPE500 EP6.414.000
Pcs 1 Kg 35,8 mc 0,38	

600

600

4735
4235
3735

EKTOR4000

AKILLE3500

Ø 265

ECOBEPPE500
EP6.000

600

Pcs 1
Kg 8,1
mc 0,20

850

Ø 60

PILAR/ECOBEPPE500
EP6.253

920

Pcs 1
Kg 10,1
mc 0,24

1250

NEW LOT/ECOBEPPE500
EP6.115

600

Pcs 1
Kg 8,4
mc 0,21

960