


GARDEN REVIVAL  
GARDEN CLASSIC  
BOLLARD  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BULKHEAD  
SOLAR  
URBAN CLASSIC  
URBAN REVIVAL  
URBAN MODERN  
POST  
LAMPS

# FELICE

MODERN SOLAR LED





**SOLAR** bollard with **motion sensor** and **replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with TÜV-CB certified **LED solar module**, self-adjusting in “energy saving” or “full power” mode. Insulation class III, protection rating IP55.

*Bollard SOLARE, con sensore di movimento e batteria sostituibile. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di modulo solare a LED, certificato TÜV-CB. Impostazione automatica della modalità “energy saving” o “full power”. Classe di isolamento III, grado di protezione IP55.*



FE1.573.S3LOP2

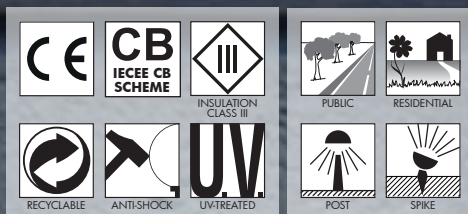

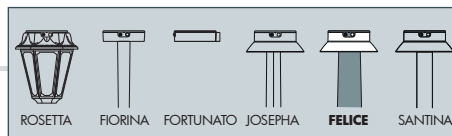

**FELICE - COMPONENTS**

IP55




**LED SOLAR MODULE** with motion sensor, photovoltaic panel and replaceable battery. Self-adjusting in "energy saving" or "full power" mode. High resistant tempered glass cover for long lasting optimised performances.

**MODULO SOLARE A LED** provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. Impostazione automatica nella modalità "energy saving" o "full power". Cover in vetro temprato ad alta resistenza per ottimizzare le prestazioni e renderle durature.

**REFLECTOR** designed to gather the lighting output and get its uniform spread. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Opal, clear or colored version available.

**RIFLETTORE** disegnato per raccogliere il fascio di luce e garantirne un'uniforme distribuzione. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione opale, trasparente o colorata.



**CONNECTOR** made of shockproof resin material, to fix the solar module to the bollard pole (Ø 95mm).

**RACCORDO** realizzato in resina antiurto atto ad agganciare il modulo solare allo stelo del bollard (Ø 95mm).

**INSTALLATION ELEMENTS:**

-POLES for bollard versions  
-SPIKE for in ground installation

**ELEMENTI DI FISSAGGIO:**

-STELI per versione bollard  
-PICCHETTO per installazione nel terreno

**FELICE**



**Dimensions and weight**

Diameter: Ø220 mm  
Height: 180/330/730 mm  
Weight: 1,2/1,4/2,1 Kg


**Moulded colours:**

Black White Grey

**Diffuser :**

Opal Clear  
Blue Green

**SOLAR MODULE**



Technical details on page 636.

**SOLAR MODULE**



POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
5V/2W	max 280 lm	4000 K	.S3L

**BATTERY ACTIVATION BOTTOM**

ON/OFF

**SELF-ADJUSTING WORKING MODE**

**ENERGY SAVING MODE**  
7%  
20 lm

**FULL POWER MODE**  
100%  
280 lm  
for 25 sec.

OFF MODE TO PRESERVE THE BATTERY

**AUTONOMY 46h**  
(at fully charged battery)

**CHARGING TIME 6h**  
at 60.000 Lux (full sunny day)

**REPLACEABLE BATTERY**

- LiFePO4 IFR 26650E3400,3,2V
- No risk of explosion
- Longer Lifetime

**MOTION SENSOR**

- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

**SOLAR PANEL**

- 5V/2W
- Monocrystalline
- Antishock tempered glass
- High resistant tempered glass

GARDEN REVIVAL  
GARDEN CLASSIC  
BOLLARD  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BULKHEAD  
SOLAR  
URBAN CLASSIC  
URBAN REVIVAL  
URBAN MODERN  
POST  
LAMPS

# FELICE

MODERN SOLAR LED



FE1.572.S3LOP2



FE1.572.S3LBU2




FE1.575.S3LOP2




FE1.574.S3LGN2

MADE IN ITALY

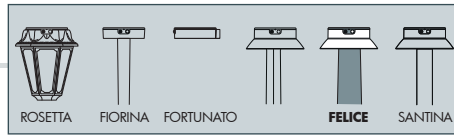

**FELICE 800**


FE1.575.S3L

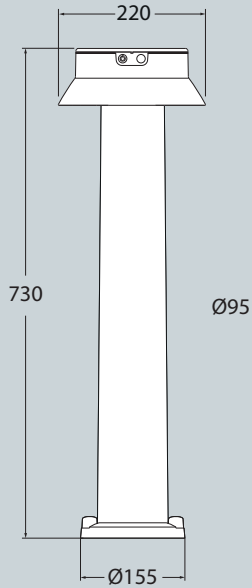

Pcs 4  
Kg 11,13  
mc 0,147

**FELICE 400**


FE1.574.S3L



Pcs 12  
Kg 17,61  
mc 0,216

**FELICE 200**


FE1.573.S3L



Pcs 18  
Kg 23,20  
mc 0,207

**FELICE 200 SPIKE**

FE1.572.S3L



Pcs 18  
Kg 29,99  
mc 0,207