

GARDEN REVIVAL  
GARDEN CLASSIC  
BOLLARD  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BULKHEAD  
SOLAR  
URBAN CLASSIC  
URBAN REVIVAL  
URBAN MODERN  
POST  
LAMPS

# GLOBE 500 CLASSIC

GRAND SIZE



Ø 500 mm PMMA globe, complete with classic base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

*Globo Ø 500 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 e predisposta per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.*

**G50.B50.E27FC1**

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

MADE IN ITALY


**GLOBE 500 CLASSIC - COMPONENTS**

IP55



**500 mm GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

**GLOBO Ø 500 mm Ø 500 mm** in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

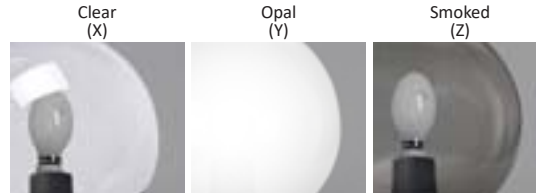

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

**FRANGILUCE** in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Luminaries **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support and of a cover provided with E27 - E40 lampholder.

**BASE del globo**, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalamпада E27 (incluso).

**GLOBE 500 CLASSIC**

G50.B50 \*



**Dimensions and weight**

Height: 630 mm  
Diameter: 500 mm  
Junction to support: diameter 60 mm  
Weight: 3,6 Kg  
Area exposed to wind pressure: CxS = m<sup>2</sup> 0,181

**Moulded colours:**

Black   White

**Painted colours:**

Antique green   Antique bronze

**Diffuser PMMA:**

Clear   Opal   Smoked

**CHROME ALUMINIUM LOUVRE**

H.FC1 closed  
Upward position



H.FC6 open  
Downward position



**E27-E40**


\*ADD. SUFFIX



Globe complete with classic base and **E27** or **E40** lampholder.

|   |                               |      |
|---|-------------------------------|------|
| suitable lamps:<br><br>CFL-LED<br>SON-HQI<br><br>max 100W | <b>E27</b><br>Lampholder only | .E27 |
|   | <b>E40</b><br>Lampholder only | .E40 |

**PHOTOMETRIC DATA SAMPLE**

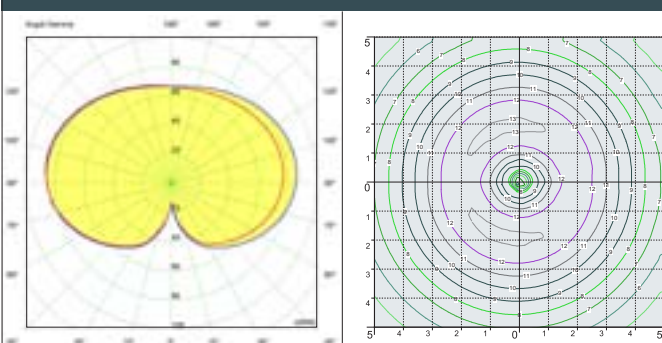

**GLOBE 500 E27 - opal**  
HQI 100W

POST height 4,5mt  
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

\* ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GARDEN REVIVAL  
GARDEN CLASSIC  
BOLLARD  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BULKHEAD  
SOLAR  
URBAN CLASSIC  
URBAN REVIVAL  
URBAN MODERN  
POST  
LAMPS


# GLOBE 500 CLASSIC

GRAND SIZE



G50.227.E27FC1





**GIONA 5000/G500**  
G50.227

Pcs 1  
Kg 63,6  
mc 1,157

Ø 500

5500

400

| <b>GIONA 4000/G500</b>       | <b>GIONA 4500/G500</b>       |
|------------------------------|------------------------------|
| G50.221                      | G50.224                      |
| Pcs 1<br>Kg 58,6<br>mc 0,907 | Pcs 1<br>Kg 61,6<br>mc 1,027 |

Ø 500

5000  
4500

400

| <b>KARMEI 3500/G500</b>      | <b>KARMEI 4000/G500</b>      |
|------------------------------|------------------------------|
| G50.234                      | G50.237                      |
| Pcs 1<br>Kg 31,6<br>mc 0,447 | Pcs 1<br>Kg 34,1<br>mc 0,498 |

Ø 500

4500  
4000

Ø 275

**SICHEM/G500**  
G50.121

Pcs 2  
Kg 15,2  
mc 0,275

1050

Ø 500

Ø 60

**GLOBE 500 CLASSIC**  
G50.B50

Pcs 2  
Kg 7,2  
mc 0,275

630

Ø 500

Ø 60

| <b>TABOR/G500</b>            | <b>HOREB/G500</b>            |
|------------------------------|------------------------------|
| G50.204                      | G50.207                      |
| Pcs 1<br>Kg 29,1<br>mc 0,407 | Pcs 1<br>Kg 31,6<br>mc 0,447 |

**KARMEI 3000/G500**  
G50.231

Pcs 1  
Kg 29,1  
mc 0,407

Ø 500

3500

Ø 275

Ø 500

4000  
3500

Ø 275