

ROSETTA

CLASSIC SOLAR LED




SOLAR lantern in classic style with **motion sensor and replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top and wall installation. Provided with TÜV-CB certified **LED solar module**, self-adjusting in “energy saving” or “full power” mode. Insulation class III, protection rating IP55

*Lanterna **SOLARE** in stile classico, con **sensore di movimento e batteria sostituibile**. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo o a parete. Fornita completa di **modulo solare a LED**, certificata TÜV-CB. Impostazione automatica della modalità “energy saving” o “full power”. Classe di isolamento III, grado di protezione IP55.*



R22.151.S3L

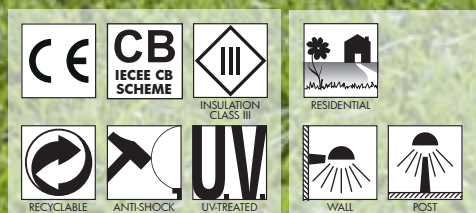

MADE IN ITALY

ROSETTA- COMPONENTS

IP55



LED SOLAR MODULE with motion sensor, photovoltaic panel and replaceable battery. Self-adjusting in "energy saving" or "full power" mode. High resistant tempered glass cover for long lasting optimised performances.

MODULO SOLARE A LED provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. Impostazione automatica nella modalità "energy saving" o "full power". Cover in vetro temprato ad alta resistenza per ottimizzare le prestazioni e renderle durature.

Lantern **ROOF**, made of shockproof resin material, provided with silicone rubber gasket to ensure a proper protection against external agent.

TETTO realizzato in resina in resina antiurto, provvisto di guarnizione in gomma siliconica per garantire un'adeguata protezione contro gli agenti esterni.

DIFFUSER with frosted finishing, one piece only, made of UV stabilized polymethylmethacrylate (PMMA).

DIFFUSORE satinato, in un unico pezzo, fabbricato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ROSETTA

R22.000 *



Dimensions and weight

Height: 240 mm
Width: 240 mm
Depth: 210 mm
Weight: 2,15 Kg

Moulded colours:

Black

Diffuser:

Frosted

SOLAR MODULE



Technical details on page 636.

SOLAR MODULE



POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
5V/2W	max 280 lm	4000 K	.S3L

REPLACEABLE BATTERY




- LiFePO4 IFR 26650E3400,3,2V
- No risk of explosion
- Longer Lifetime

MOTION SENSOR



- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

SOLAR PANEL




- 5V/2W
- Monocrystalline
- Antishock tempered glass
- High resistant tempered glass

BATTERY ACTIVATION BOTTON



ON/OFF

SELF-ADJUSTING WORKING MODE

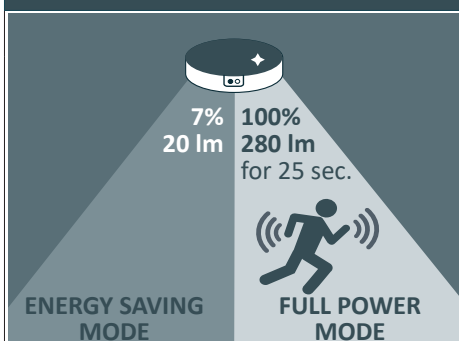

OFF MODE TO PRESERVE THE BATTERY

AUTONOMY

46h

(at fully charged battery)


CHARGING TIME 6h
at 60.000 Lux (full sunny day)

ROSETTA
CLASSIC SOLAR LED



BISSO/ROSETTA

R22.131.S3L




Pcs 12
Kg 24,14
mc 0,216

ROSETTA


R22.000.S3L

Pcs 1
Kg 1,3
mc 0,018



MINILOT/ROSETTA


R22.111.S3L

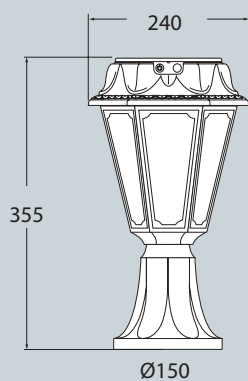

Pcs 12
Kg 23,49
mc 0,216

MIZAR/ROSETTA


R22.151.S3L

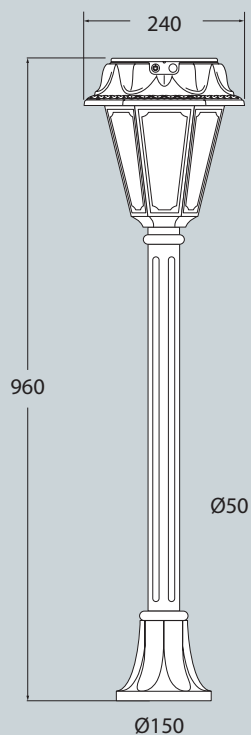

Pcs 1
Kg 3,2
mc 0,070

IAFET/ROSETTA

R22.162.S3L

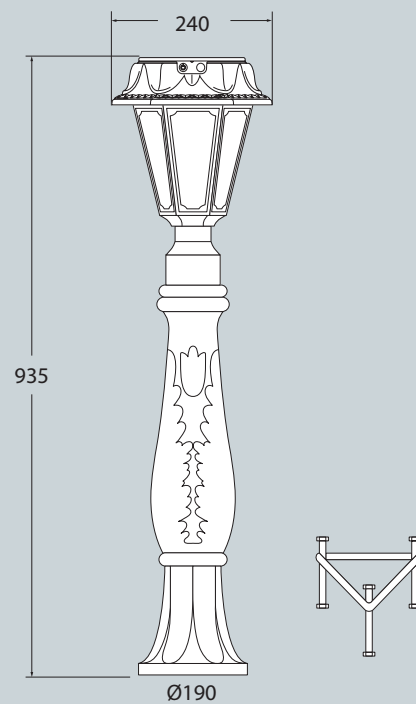

Pcs 1
Kg 4,8
mc 0,070