

GARDEN REVIVAL  
GARDEN CLASSIC  
BOLLARD  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BULKHEAD  
SOLAR  
URBAN CLASSIC  
URBAN REVIVAL  
URBAN MODERN  
POST  
LAMPS

# VIVI 400 HIGH POWER LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included.** Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



V50.000.H1L


E27 HIGH POWER LED

**INDOOR & OUTDOOR USE**

+80°C  
-30°

90%  
HUMIDITY


VOLTAGE SURGE  
RESISTANT



DRIVER  
SILICONE  
PROTECTION



MADE IN ITALY



**VIVI 400 HIGH POWER LED - COMPONENTS**

**IP55**



**ROOF** made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

*TESTO* realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

*SOFFITTO* riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di *lampada a LED ad ALTA POTENZA*. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

**DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

*DIFFUSORE* realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

*ANELLO* decorativo di connessione da fissare sul diffusore dell'apparecchio.

**VIVI 400 HIGH POWER LED**

V50.000 \*



**Dimensions and weight**

Height: 420 mm  
Diameter: 480 mm  
Weight: 4,2 Kg  
Junction to support: Ø 60 mm  
Area expose to wind pressure: CxS = m<sup>2</sup> 0,1449

**Moulded colours:**

Black  White  Grey

**Diffuser PMMA:**

Clear  Opal



**HIGH POWER LED**





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

**100 - 240 V**

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27 	<b>30 W</b>	<b>3620 lm</b>	4000 K	.Q1K
			3000 K	
LED E27 	<b>50 W</b>	<b>6550 lm</b>	4000 K	.H1L
			3000 K	

**PHOTOMETRIC DATA SAMPLE**




**VIVI 400 E27 HIGH POWER LED 50W**

POST height 3,5mt  
10x10mt area: average 28 lux


The photometric data for all the versions are available upon request or on our website.

**LED LAMPS**



Comply with: EU2019/2015  
EU2019/2020  
Technical details on page 636.

**CCT SETTABLE LED LAMP(\*)**



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (30W only)

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GARDEN REVIVAL  
GARDEN CLASSIC  
BOLLARD  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BULKHEAD  
SOLAR  
URBAN CLASSIC  
URBAN REVIVAL  
URBAN MODERN  
POST  
LAMPS

# VIVI 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di sistema modulare a LED GX53 con kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*




V50.000.D6K

**CCT SETTABLE**

3000 K   4000 K   6500 K

SDCM <6



**VIVI 400 GX53 LED - COMPONENTS**

**IP55**



**ROOF** made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

**TETTO** in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



**DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

**DIFFUSORE** realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.



Decorative connection **RING** to be fixed on the luminaries diffuser.

**ANELLO** decorativo di connessione da fissare sul diffusore dell'apparecchio.

**VIVI 400 GX53 LED**

V50.000 \*



**Dimensions and weight**

Height: 420 mm  
Diameter: 480 mm  
Weight: 4,9 Kg  
Junction to support: Ø 60 mm  
Area expose to wind pressure: CxS = m<sup>2</sup> 0,1449

**Moulded colours:**

Black  White  Grey

**Diffuser PMMA:**

Clear  Opal


**GX53 LED**



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

**100 - 240 V**


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	6x 10W <b>60W</b>	<b>7740 lm</b>	6500 K 4000 K 3000 K	.D6K

**LED LAMPS**




Comply with: EU2019/2015  
EU2019/2020  
Technical details on page 636.

**CCT SETTABLE LED LAMP**



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

**PHOTOMETRIC DATA SAMPLE**

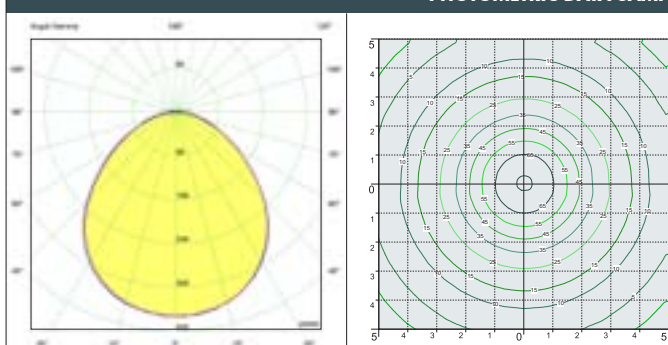

**VIVI 400 GX53 LED**  
6X10W

POST height 3,5mt  
10x10mt area: average 37 lux

The photometric data for all the versions are available upon request or on our website.

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GARDEN REVIVAL  
GARDEN CLASSIC  
BOLLARD  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BULKHEAD  
SOLAR  
URBAN CLASSIC  
URBAN REVIVAL  
URBAN MODERN  
POST  
LAMPS

# VIVI 400 E27

LARGE SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*



V50.000.E27



**VIVI 400 E27 - E40 - COMPONENTS**

**IP55**



**ROOF** made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

*TETTO* realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

**SOFFITTO** realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampana E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

**PARABOLA** riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

**DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

**DIFFUSORE** realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

**ANELLO** decorativo di connessione da fissare sul diffusore dell'apparecchio.



**Dimensions and weight**

Height: 420 mm  
Diameter: 480 mm  
Weight: 3,7 Kg  
Junction to support: Ø 60 mm  
Area expose to wind pressure: CxS = m<sup>2</sup> 0,1449

**Moulded colours:**

Black White Grey

**Diffuser PMMA:**

Clear Opal

**E27-E40**



\*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps:  CFL-LED SON-HQI  max 100W	<b>E27</b> Lampholder only	.E27
	<b>E40</b> Lampholder only	.E40

**PHOTOMETRIC DATA SAMPLE**




**VIVI 400 E27**  
HQI 70W

POST height 4mt  
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

**HORIZONTAL BULB**

AGAINST LIGHT POLLUTION



E27 - E40 VERSION

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LAMPS POST URBAN MODERN URBAN REVIVAL URBAN CLASSIC SOLAR BULKHEAD FLOODLIGHT BRICKLIGHT IN-GROUND DOWNLIGHT UP&DOWN BOLLARD GARDEN CLASSIC GARDEN REVIVAL

# VIVI 400

LARGE SIZE



V50.364.A10.D6K




L41.128.H1L



V50.414.A10.Q1K

MADE IN ITALY



**LUIGI 400-DR**  
L41.128

Pcs 1  
Kg 4,2  
mc 0,09

\*rope not included

**NEW LOT/VIVI400**  
V50.115

Pcs 1  
Kg 5,2  
mc 0,071

**VIVI 400**  
V50.000

Pcs 1  
Kg 4,9  
mc 0,09

**MIDIPIAR/VIVI400**  
V50.254

Pcs 1  
Kg 5,5  
mc 0,092

**MARIO/VIVI400**  
V50.129

Pcs 1  
Kg 5,2  
mc 0,07

\*rope not included

<b>EKTOR 4000 MIDIPIAR/VIVI400 1L</b> V50.371.A10	<b>AKILLE 4000 MIDIPIAR/VIVI400 1L</b> V50.421.A10
Pcs 1 Kg 41 mc 0,314	
<b>EKTOR 3500 MIDIPIAR/VIVI400 1L</b> V50.367.A10	<b>AKILLE 3500 MIDIPIAR/VIVI400 1L</b> V50.417.A10
Pcs 1 Kg 37,5 mc 0,284	

**EKTOR 2500 MIDIPIAR/VIVI400 1L**  
V50.361.A10

Pcs 1  
Kg 30,6  
mc 0,235

Ø 265

<b>EKTOR 3000 MIDIPIAR/VIVI400 1L</b> V50.364.A10	<b>AKILLE 3000 MIDIPIAR/VIVI400 1L</b> V50.414.A10
Pcs 1 Kg 34 mc 0,262	

Pcs 1  
Kg 34  
mc 0,262

Ø 265

Ø 265